
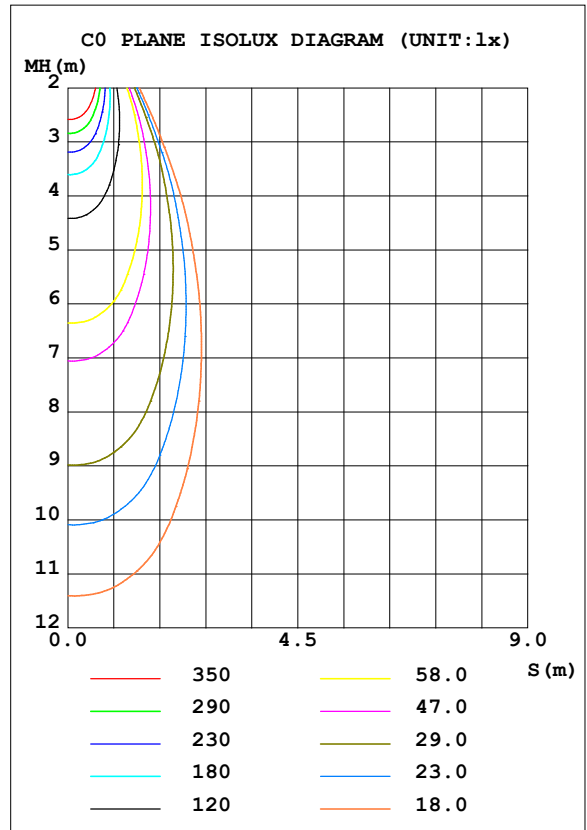


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 81.78 lm/W			
MODEL		I _{max} (cd)	2343	S/MH (C0/180)	0.58
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.60
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1110.1	<input type="checkbox"/> UP, DN (C0-180)	0.0, 52.2
NOMINAL FLUX (lm)	1110.1	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 47.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

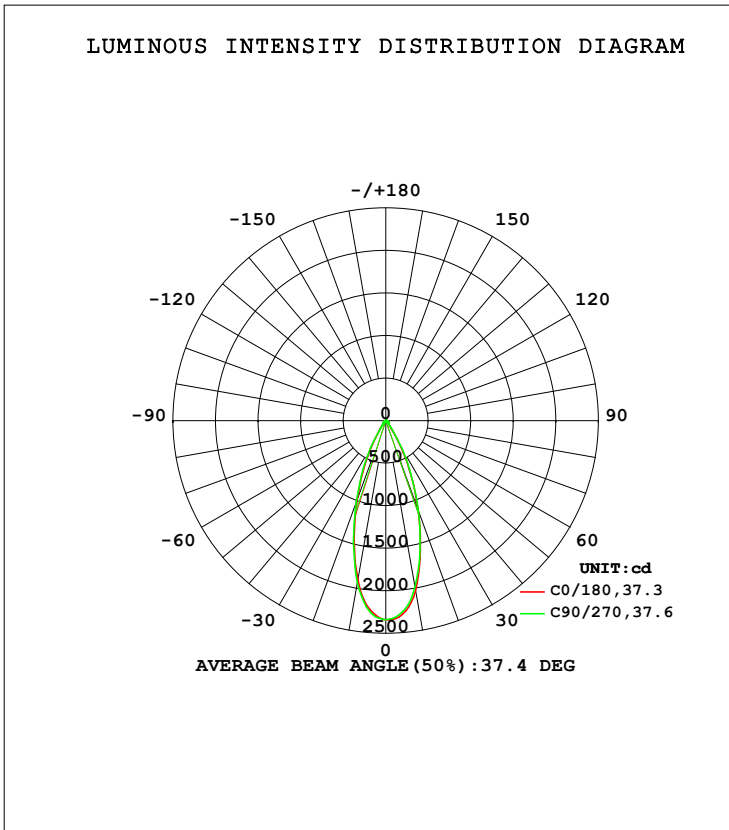

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	2026	2033	1985	1916	1897	1905	1929	1989	0- 10	205.9	205.9	18.5,18.5
20	1114	1199	1115	1050	983.3	972.5	1016	1080	10- 20	415.6	621.6	56,56
30	358.9	462.0	392.2	353.6	290.3	279.2	301.3	331.3	20- 30	307.6	929.2	83.7,83.7
40	62.78	73.12	68.17	64.07	57.78	57.22	59.16	61.69	30- 40	93.08	1022	92.1,92.1
50	36.45	37.39	37.68	37.00	36.17	35.80	36.02	36.11	40- 50	35.97	1058	95.3,95.3
60	21.63	22.04	22.20	21.91	21.78	21.72	21.70	21.50	50- 60	25.42	1084	97.6,97.6
70	11.81	11.92	11.94	11.84	12.09	12.37	12.35	12.00	60- 70	16.65	1100	99.1,99.1
80	4.598	3.870	2.900	3.792	4.797	4.638	4.068	4.332	70- 80	8.423	1109	99.9,99.9
90	0.0471	0.0397	0.0427	0.0350	0.0541	0.0527	0.0527	0.0497	80- 90	1.379	1110	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

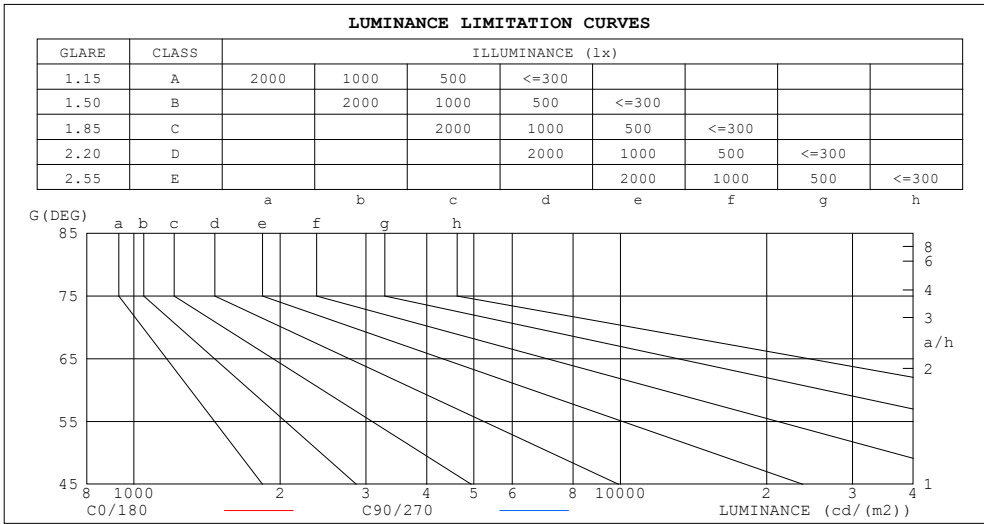

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	90	6
80	238	150
75	274	254
70	311	314
65	353	360
60	389	400
55	440	457
50	510	528
45	571	577


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.82	.79	.87	.82	.78	.85	.81	.78	.83	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.78	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.70	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.70	.66	.63	.62
10.0	.69	.64	.61	.69	.64	.61	.68	.64	.61	.68	.63	.61	.67	.63	.60	.59

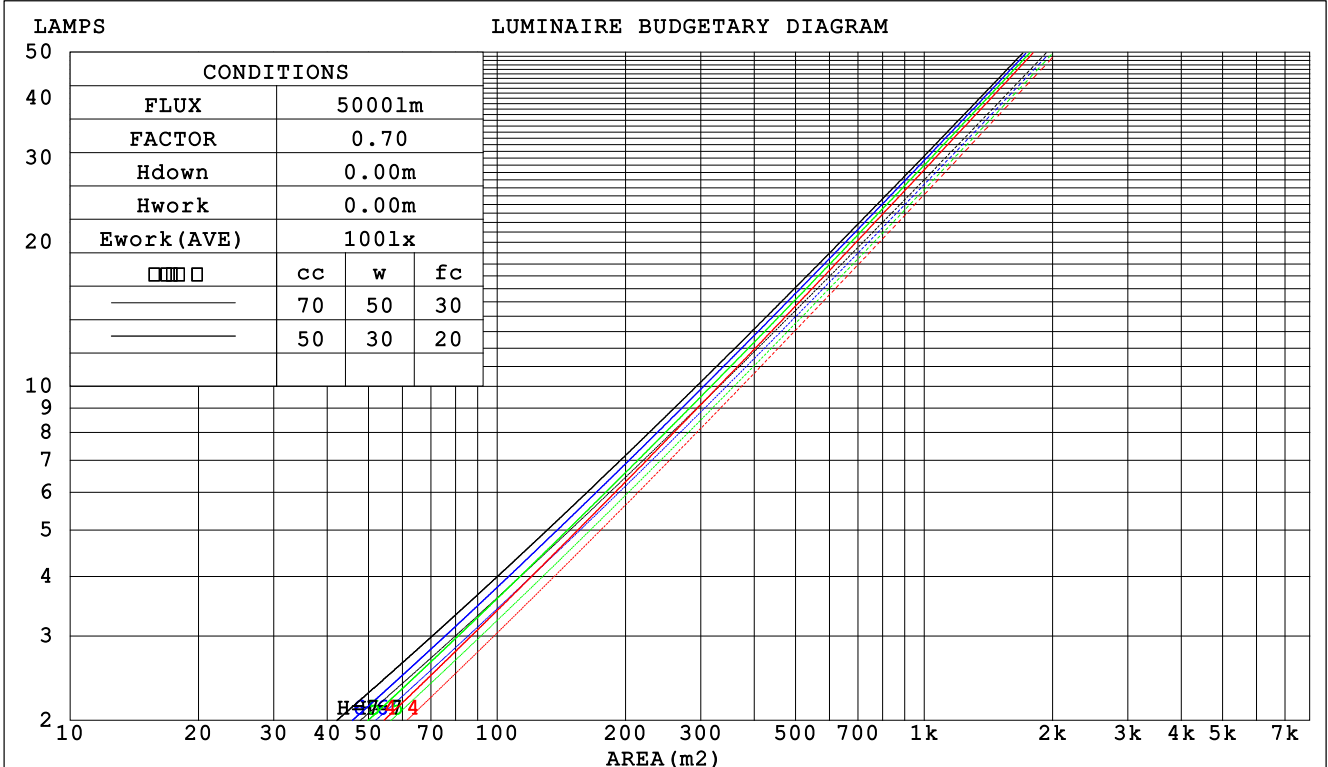

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.170	.096	.031	.163	.093	.030	.150	.086	.028	.139	.080	.026	.128	.074	.024	
2.0	.160	.088	.027	.154	.085	.026	.144	.080	.025	.134	.075	.024	.125	.071	.022	
3.0	.151	.080	.024	.146	.078	.024	.137	.074	.023	.129	.071	.022	.121	.067	.021	
4.0	.142	.074	.022	.138	.072	.021	.130	.069	.021	.123	.066	.020	.117	.063	.019	
5.0	.134	.068	.020	.131	.067	.020	.124	.065	.019	.118	.062	.018	.112	.060	.018	
6.0	.127	.064	.018	.124	.063	.018	.118	.061	.018	.113	.059	.017	.108	.057	.017	
7.0	.121	.060	.017	.118	.059	.017	.113	.057	.016	.108	.056	.016	.104	.054	.016	
8.0	.115	.056	.016	.113	.056	.016	.108	.054	.015	.104	.053	.015	.100	.051	.015	
9.0	.110	.053	.015	.108	.053	.015	.104	.051	.015	.100	.050	.014	.097	.049	.014	
10.0	.105	.051	.014	.104	.050	.014	.100	.049	.014	.097	.048	.014	.093	.047	.013	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.132	.114	.099	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.091	.121	.098	.079	.083	.068	.055	.048	.040	.033	.015	.013	.011	
4.0	.130	.099	.074	.112	.085	.065	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.121	.087	.061	.104	.075	.053	.072	.052	.038	.041	.031	.022	.013	.010	.007	
6.0	.113	.077	.052	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.106	.069	.044	.091	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.100	.063	.038	.086	.055	.033	.059	.038	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.033	.081	.050	.029	.056	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.090	.053	.029	.077	.046	.025	.054	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm										
NAME: ASD-CD-PR-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:4000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.0	5.8	5.2	6.0	6.2	5.1	6.0	5.4	6.2	6.3
3H	5.6	6.4	5.8	6.6	6.8	5.7	6.5	6.0	6.7	6.9
4H	5.8	6.6	6.1	6.8	7.0	5.9	6.7	6.2	6.9	7.1
6H	6.0	6.7	6.3	6.9	7.2	6.0	6.7	6.3	6.9	7.2
8H	6.0	6.7	6.3	6.9	7.2	6.0	6.6	6.3	6.9	7.2
12H	6.0	6.6	6.3	6.9	7.2	5.9	6.6	6.2	6.8	7.1
4H 2H	5.2	5.9	5.5	6.2	6.4	5.3	6.1	5.6	6.3	6.5
3H	6.0	6.6	6.3	6.9	7.2	6.1	6.7	6.4	7.0	7.3
4H	6.3	6.9	6.6	7.2	7.5	6.4	7.0	6.7	7.3	7.6
6H	6.6	7.1	6.9	7.4	7.8	6.5	7.0	6.9	7.3	7.7
8H	6.6	7.1	7.0	7.4	7.8	6.5	6.9	6.9	7.3	7.7
12H	6.6	7.0	7.0	7.4	7.8	6.4	6.9	6.8	7.2	7.6
8H 4H	6.4	6.9	6.8	7.2	7.6	6.4	6.9	6.8	7.3	7.6
6H	6.7	7.1	7.1	7.5	7.9	6.6	7.0	7.0	7.4	7.8
8H	6.8	7.1	7.2	7.6	8.0	6.6	6.9	7.0	7.4	7.8
12H	6.8	7.1	7.2	7.5	8.0	6.5	6.8	7.0	7.3	7.7
12H 4H	6.3	6.8	6.7	7.2	7.5	6.4	6.9	6.8	7.2	7.6
6H	6.7	7.0	7.1	7.5	7.9	6.6	6.9	7.0	7.4	7.8
8H	6.8	7.1	7.2	7.5	8.0	6.6	6.9	7.0	7.3	7.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.7					+ 0.7 / - 0.8				
1.5H	+ 0.8 / - 0.4					+ 1.2 / - 0.5				
2.0H	+ 0.6 / - 0.5					+ 0.7 / - 0.6				

CIE Pub.117, 1110 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.4)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

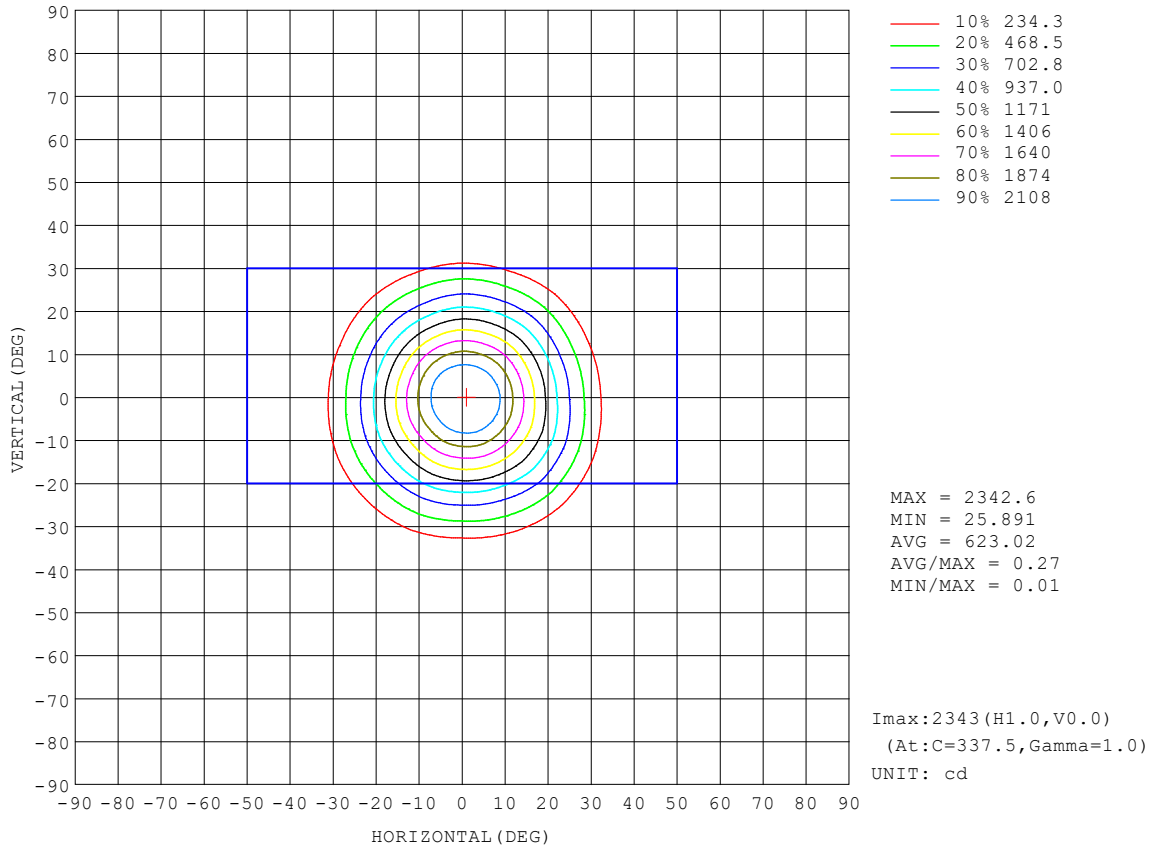


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

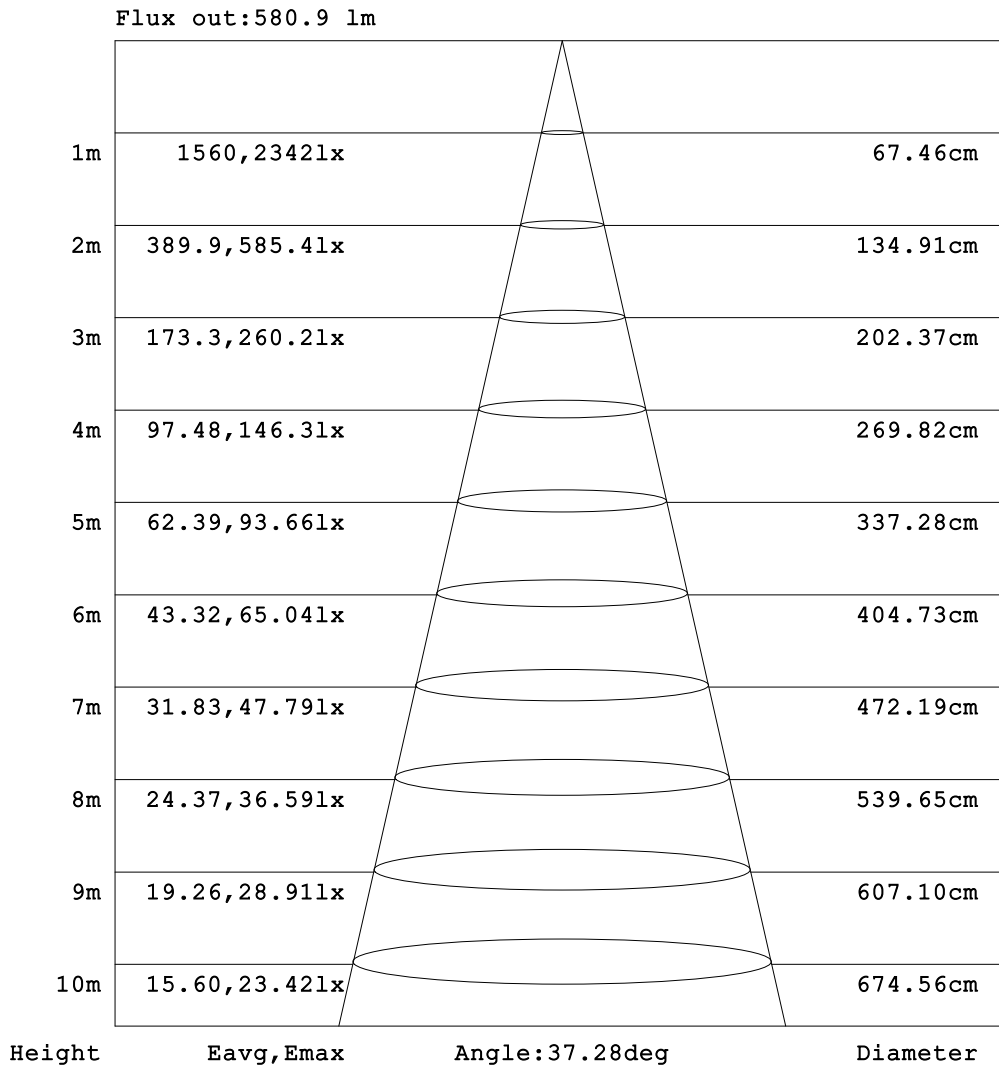


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

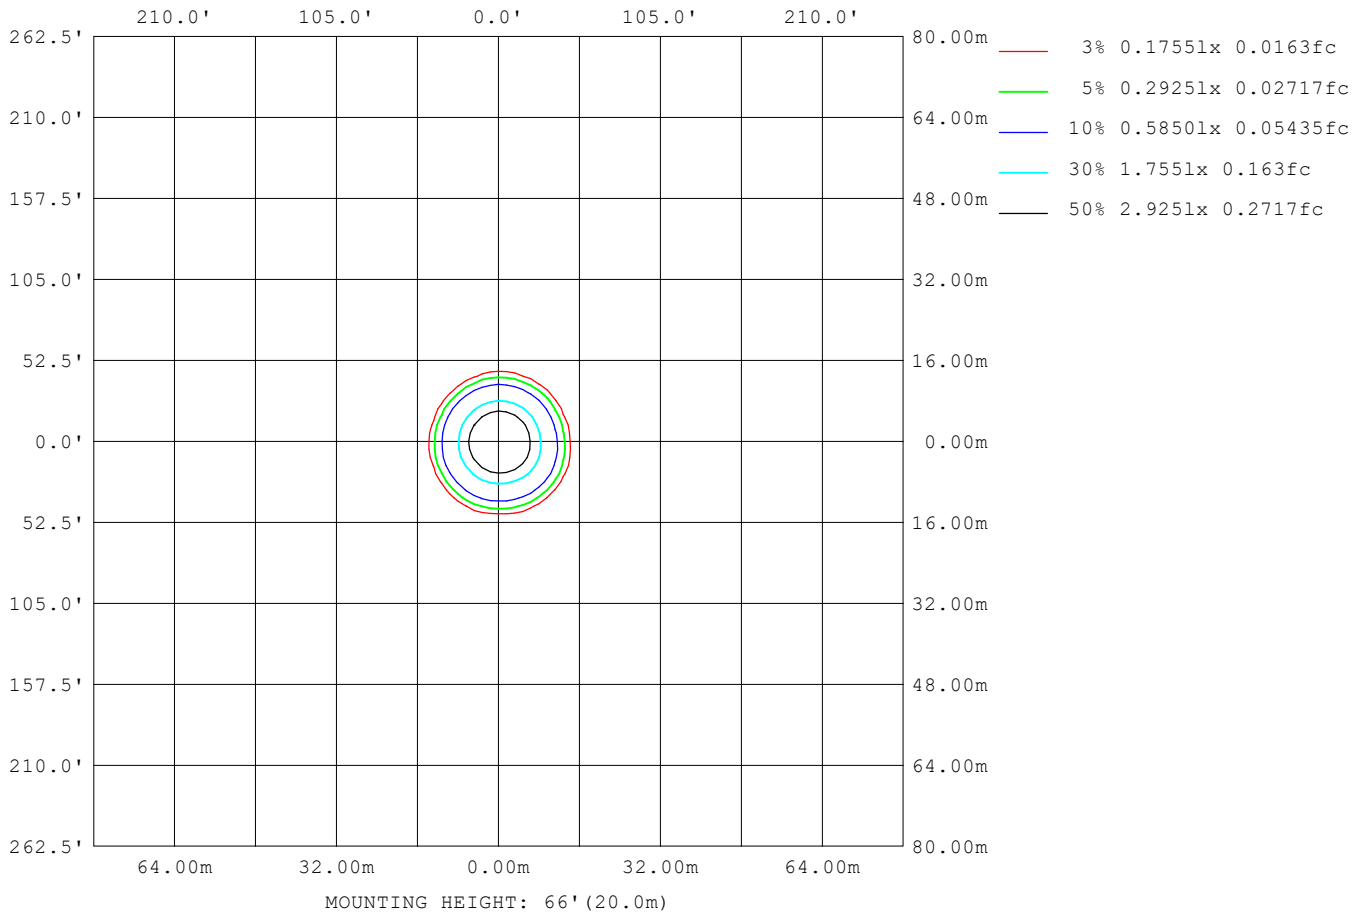

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	355
L_0~180 (75) av	278
L_0~180 (85) av	99
L_90~270 (65) av	360
L_90~270 (75) av	272
L_90~270 (85) av	26
L_45 (65) av	357
L_45 (75) av	279
L_45 (85) av	64

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

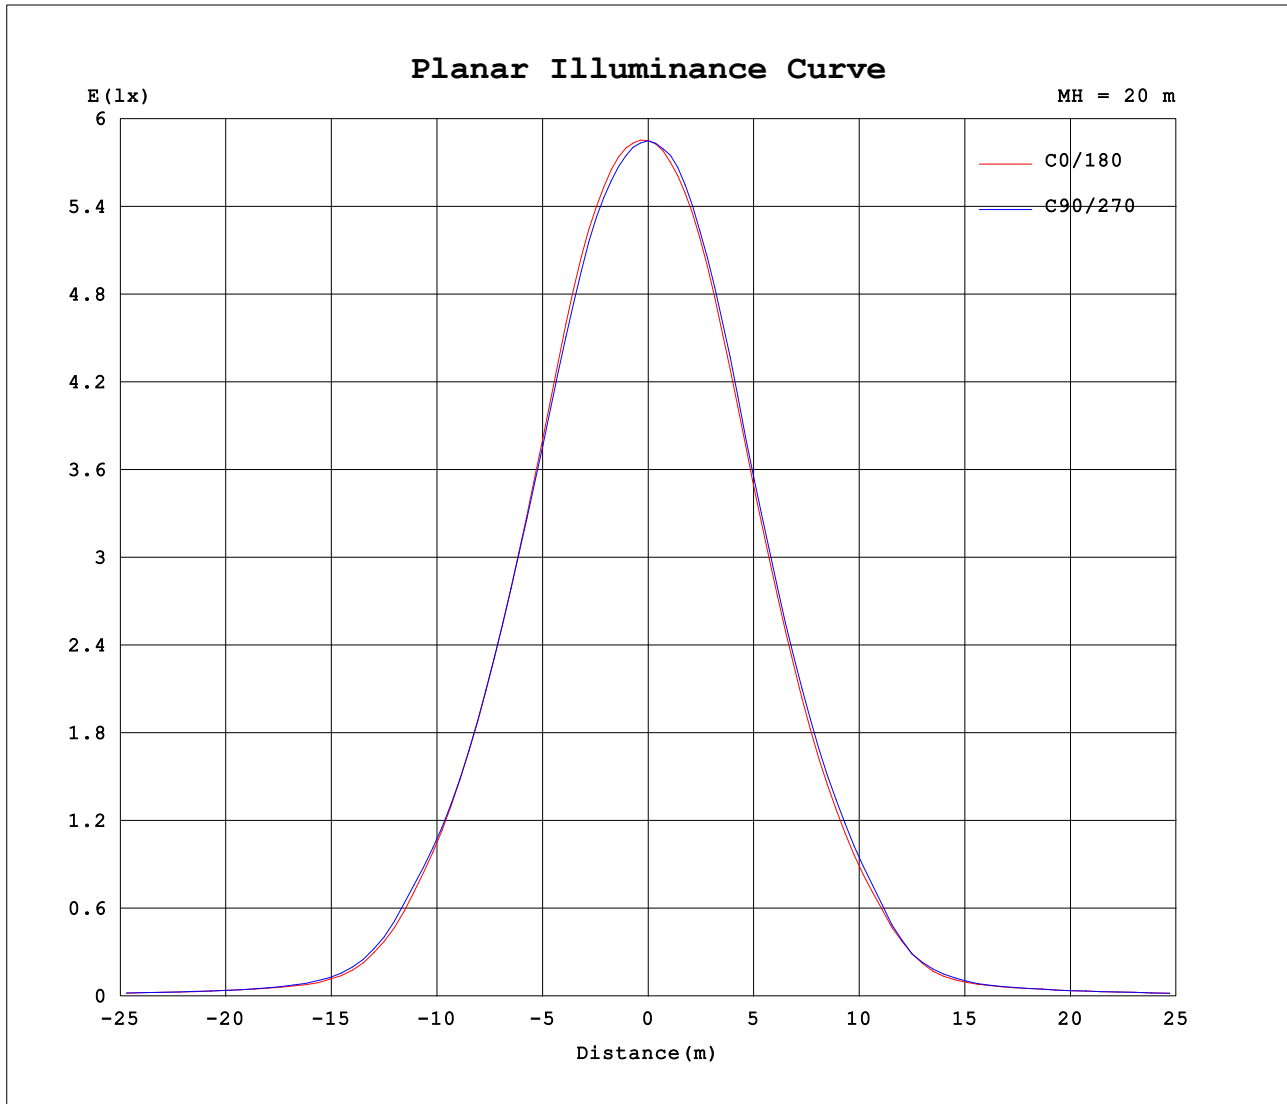

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.95V I:0.1148A P:13.574W PF:0.9474 Freq:59.98Hz Lamp Flux:1110.1x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2339	2339	2339	2339	2339	2339	2339	2339	2339	2339	2339	2339	2339	2339	2339	2339			
5	2286	2284	2274	2267	2254	2250	2240	2233	2222	2228	2231	2236	2245	2260	2273	2280			
10	2026	2039	2033	2022	1985	1956	1916	1912	1897	1900	1905	1915	1929	1948	1989	2009			
15	1578	1617	1620	1602	1561	1533	1479	1468	1440	1419	1432	1442	1467	1489	1537	1556			
20	1114	1190	1199	1152	1115	1096	1050	1029	983	964	972	977	1016	1035	1080	1092			
25	699	789	807	743	706	707	667	646	599	588	597	598	634	641	679	675			
30	359	436	462	426	392	393	354	330	290	276	279	280	301	302	331	332			
35	130	161	175	160	146	148	128	113	99.6	98.3	101	103	111	114	122	119			
40	62.8	70.0	73.1	71.0	68.2	68.6	64.1	60.5	57.8	57.4	57.2	57.6	59.2	59.9	61.7	61.3			
45	44.9	44.9	45.1	45.4	45.3	45.4	45.0	44.6	44.2	43.7	43.7	43.9	44.2	44.4	44.5	44.3			
50	36.4	37.0	37.4	37.8	37.7	37.6	37.0	36.6	36.2	35.8	35.8	35.8	36.0	36.0	36.1	36.2			
55	28.1	28.5	28.8	29.3	29.1	28.7	28.3	28.0	27.7	27.4	27.2	27.1	27.2	27.3	27.5	27.7			
60	21.6	21.9	22.0	22.3	22.2	22.1	21.9	21.9	21.8	21.7	21.7	21.7	21.7	21.5	21.5	21.4			
65	16.6	16.8	16.8	17.0	16.9	16.9	16.6	16.8	16.8	16.8	17.0	16.9	16.9	16.7	16.6	16.5			
70	11.8	11.9	11.9	12.1	11.9	12.0	11.8	12.0	12.1	12.2	12.4	12.4	12.4	12.1	12.0	11.8			
75	7.89	7.91	7.88	7.56	7.29	7.47	7.81	8.00	8.11	8.23	8.39	8.36	8.32	8.11	8.04	7.89			
80	4.60	4.59	3.87	3.22	2.90	3.15	3.79	4.66	4.80	4.88	4.64	4.25	4.07	4.05	4.33	4.61			
85	0.87	1.41	0.44	0.05	0.06	0.05	0.39	1.37	1.04	1.63	0.92	0.54	0.45	0.44	0.74	1.42			
90	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: