
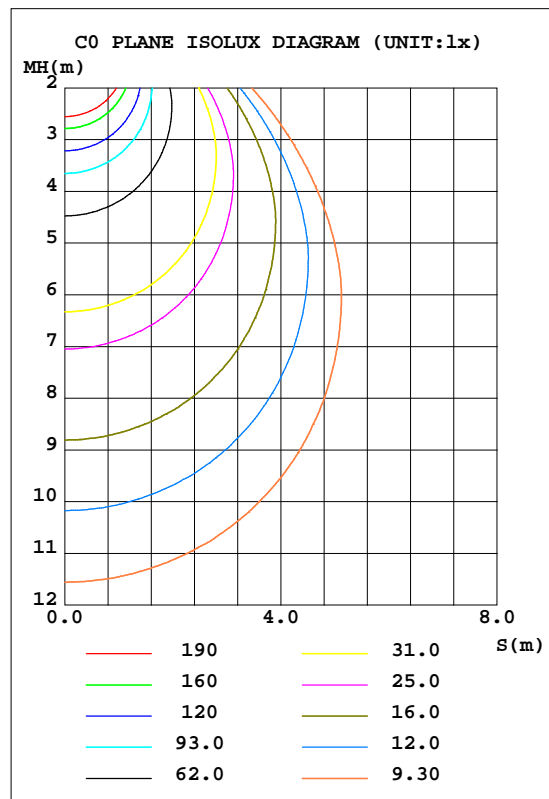


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 90.82 lm/W			
AMODEDL7-6DA30AC(30W 3500K)		I _{max} (cd)	1244	S/MH(C0/180)	1.18
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	2624.6	h UP, DN(C0-180)	0.2,48.8
NOMINAL FLUX(lm)	2624.6	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

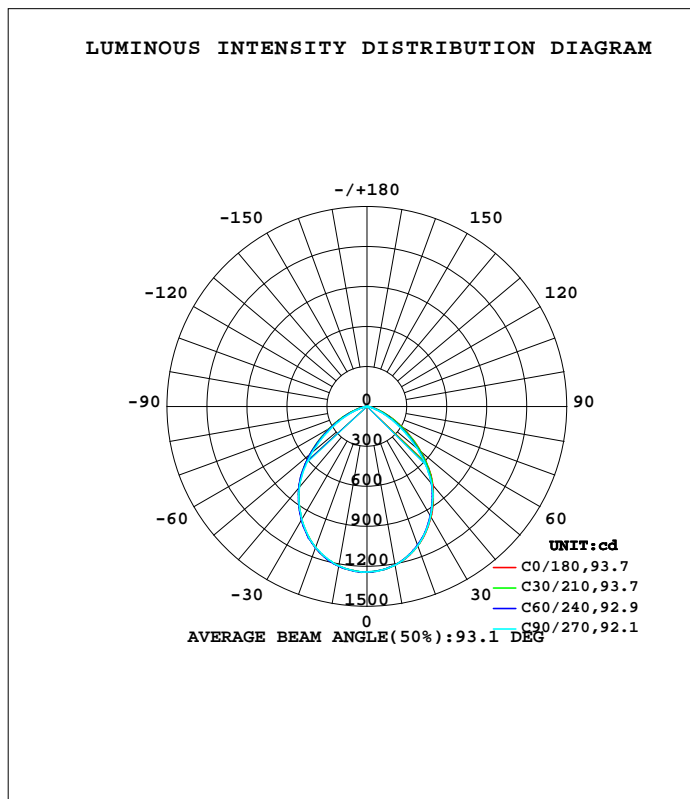

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1209	1207	1209	1212	1215	1216	1215	1213	0- 10	117.1	117.1	4.46,4.46
20	1113	1108	1111	1119	1128	1129	1126	1123	10- 20	330.6	447.7	17.1,17.1
30	961.0	952.5	954.3	966.8	980.4	982.6	978.7	973.5	20- 30	483.3	931.0	35.5,35.5
40	769.5	759.3	756.3	776.7	793.9	795.9	790.3	783.2	30- 40	547.8	1479	56.3,56.3
50	528.9	512.0	492.8	527.4	556.2	558.2	537.4	539.6	40- 50	507.6	1986	75.7,75.7
60	296.4	275.6	249.1	282.7	318.0	313.1	284.4	296.1	50- 60	363.5	2350	89.5,89.5
70	124.3	106.1	85.29	105.3	130.7	123.1	103.5	117.2	60- 70	192.5	2542	96.9,96.9
80	26.40	22.12	18.81	21.36	24.74	23.34	22.33	25.34	70- 80	61.85	2604	99.2,99.2
90	0.2026	0.0414	0.0248	0.0207	0.0658	0.0657	0.0832	0.0513	80- 90	9.332	2614	99.6,99.6
100	0.2620	0.2587	0.3368	0.2421	0.4108	0.2874	0.2133	0.2587	90-100	0.1379	2614	99.6,99.6
110	0.7871	0.8331	0.9033	0.7797	0.9937	0.8129	0.7956	0.8211	100-110	0.5669	2614	99.6,99.6
120	1.509	1.543	1.716	1.502	1.724	1.494	1.616	1.564	110-120	1.177	2615	99.7,99.7
130	2.248	2.299	2.529	2.245	2.529	2.262	2.421	2.303	120-130	1.744	2617	99.7,99.7
140	2.789	2.869	3.127	2.889	3.160	2.890	3.044	2.943	130-140	2.047	2619	99.8,99.8
150	3.356	3.399	3.661	3.423	3.653	3.415	3.554	3.468	140-150	2.010	2621	99.9,99.9
160	3.848	3.920	4.014	3.994	4.169	3.928	3.988	3.928	150-160	1.714	2623	99.9,99.9
170	4.341	4.384	4.432	4.375	4.538	4.306	4.350	4.330	160-170	1.179	2624	100,100
180	4.710	4.868	4.769	4.749	4.793	4.733	4.728	4.757	170-180	0.4319	2625	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

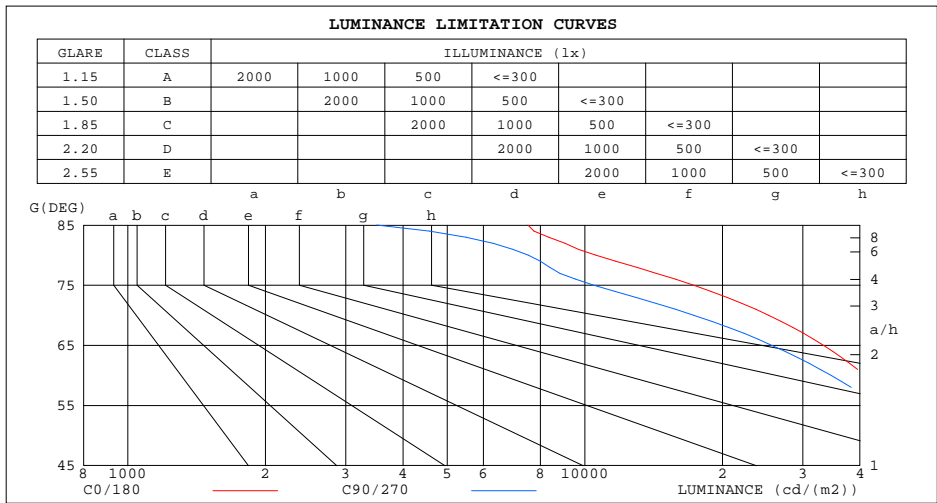

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7504	3507
80	10559	7523
75	17298	10472
70	25242	17320
65	33293	25663
60	41183	34605
55	49260	43896
50	57160	53249
45	64357	61617


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	1.00	1.05	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.90	.88
2.0	.95	.89	.85	.93	.88	.84	.90	.85	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.72	.83	.77	.72	.81	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.69	.63	.75	.68	.62	.73	.66	.61	.70	.65	.60	.68	.64	.60	.58
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.54	.49	.62	.54	.48	.60	.53	.48	.58	.52	.48	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.47	.42	.40
8.0	.52	.45	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

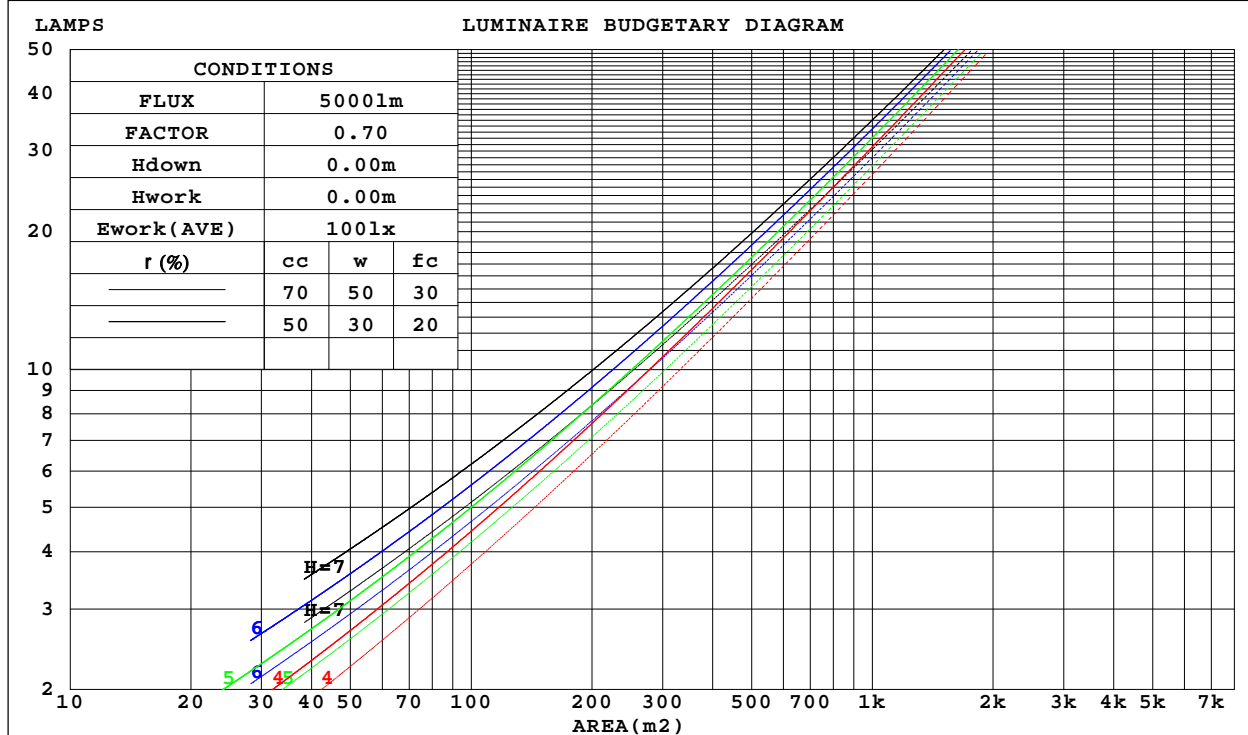

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks:

WEC AND CCEC

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.252	.143	.045	.245	.140	.044	.232	.133	.042	.220	.127	.041	.208	.121	.039	
2.0	.245	.134	.041	.239	.132	.041	.228	.127	.039	.217	.122	.038	.207	.117	.037	
3.0	.233	.124	.037	.228	.122	.037	.217	.118	.036	.208	.114	.035	.199	.110	.034	
4.0	.219	.114	.034	.215	.112	.033	.206	.109	.033	.197	.106	.032	.190	.103	.031	
5.0	.206	.105	.030	.202	.104	.030	.194	.101	.030	.187	.098	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	.170	.089	.027	
7.0	.182	.090	.026	.179	.089	.025	.172	.087	.025	.166	.085	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.074	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.060	.055	.049	.019	.018	.016	
2.0	.169	.135	.107	.145	.117	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.119	.073	.039	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.132	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.072	.034	.109	.062	.029	.075	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	26.3	25.2	26.6	26.9	24.0	25.5	24.4	25.8	26.1
3H	25.7	27.0	26.1	27.3	27.7	24.6	25.9	25.0	26.2	26.6
4H	25.9	27.1	26.3	27.4	27.8	24.6	25.9	25.1	26.2	26.6
6H	25.9	27.0	26.3	27.4	27.8	24.6	25.8	25.1	26.1	26.5
8H	25.9	27.0	26.3	27.4	27.8	24.6	25.7	25.1	26.1	26.5
12H	25.9	26.9	26.3	27.3	27.7	24.6	25.6	25.0	26.0	26.4
4H 2H	25.1	26.3	25.5	26.6	27.0	24.4	25.6	24.8	26.0	26.3
3H	26.1	27.1	26.5	27.5	27.9	25.1	26.1	25.5	26.5	26.9
4H	26.3	27.2	26.7	27.6	28.1	25.1	26.0	25.6	26.5	26.9
6H	26.4	27.2	26.9	27.6	28.1	25.2	25.9	25.6	26.4	26.9
8H	26.4	27.1	26.9	27.6	28.0	25.2	25.9	25.6	26.3	26.8
12H	26.4	27.0	26.9	27.5	28.0	25.1	25.8	25.6	26.3	26.7
8H 4H	26.3	27.0	26.8	27.5	27.9	25.2	25.9	25.6	26.3	26.8
6H	26.4	27.0	26.9	27.5	28.0	25.2	25.8	25.7	26.3	26.8
8H	26.4	26.9	26.9	27.4	27.9	25.2	25.7	25.7	26.3	26.8
12H	26.4	26.9	26.9	27.4	28.0	25.2	25.7	25.7	26.2	26.7
12H 4H	26.3	26.9	26.7	27.4	27.9	25.1	25.8	25.6	26.3	26.8
6H	26.4	26.9	26.9	27.4	27.9	25.2	25.7	25.7	26.2	26.7
8H	26.4	26.8	26.9	27.4	27.9	25.2	25.7	25.7	26.2	26.7
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2414]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	58	73	64	57	72	63	57	51
1.00	83	73	67	81	72	66	79	73	66	60
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	86	80	92	85	79	89	83	78	72
2.00	100	93	88	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	93	89	81
3.00	106	100	96	104	99	95	100	96	92	85
4.00	109	104	101	107	103	99	103	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2414]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

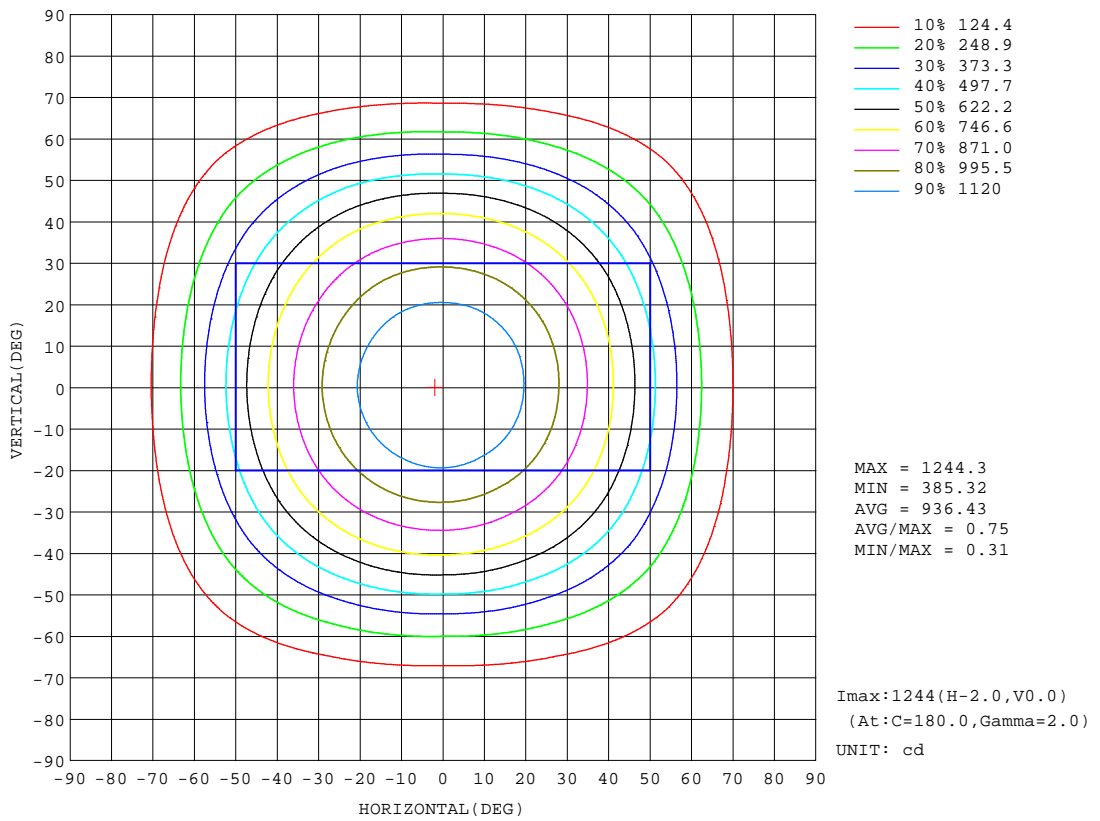


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks:

AAI Figure

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:1846 lm

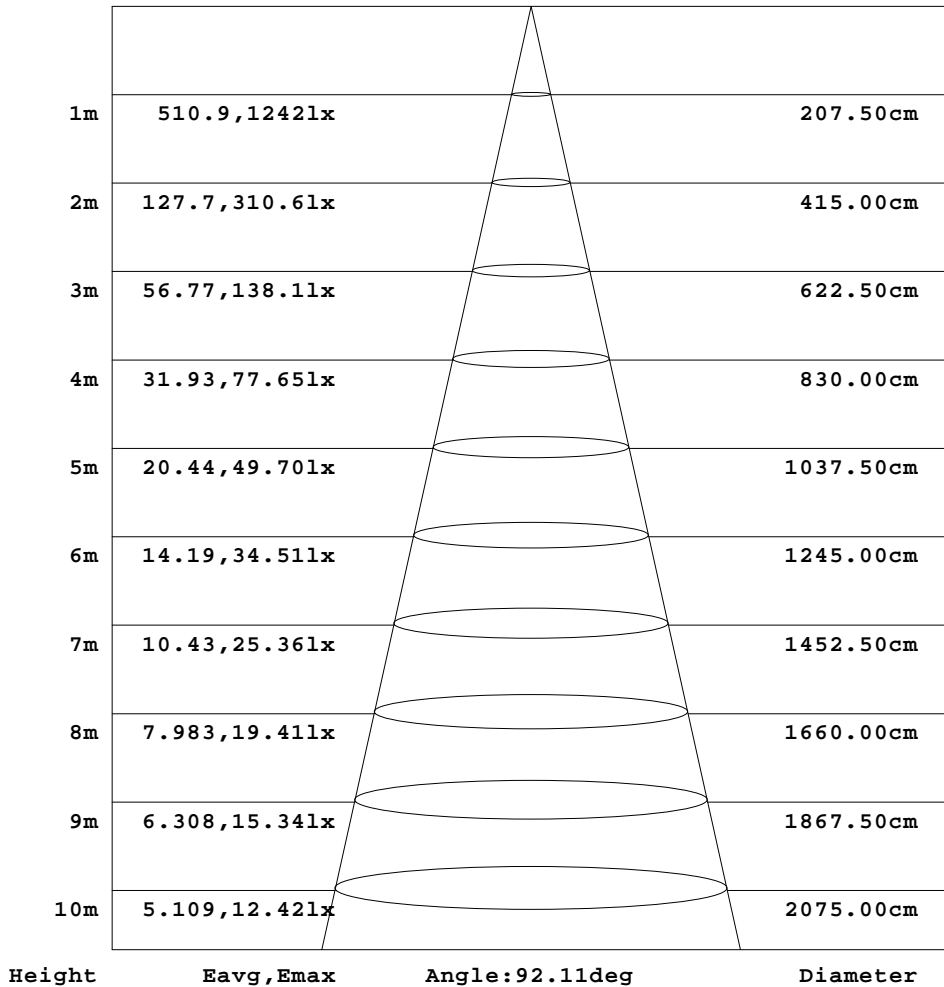


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

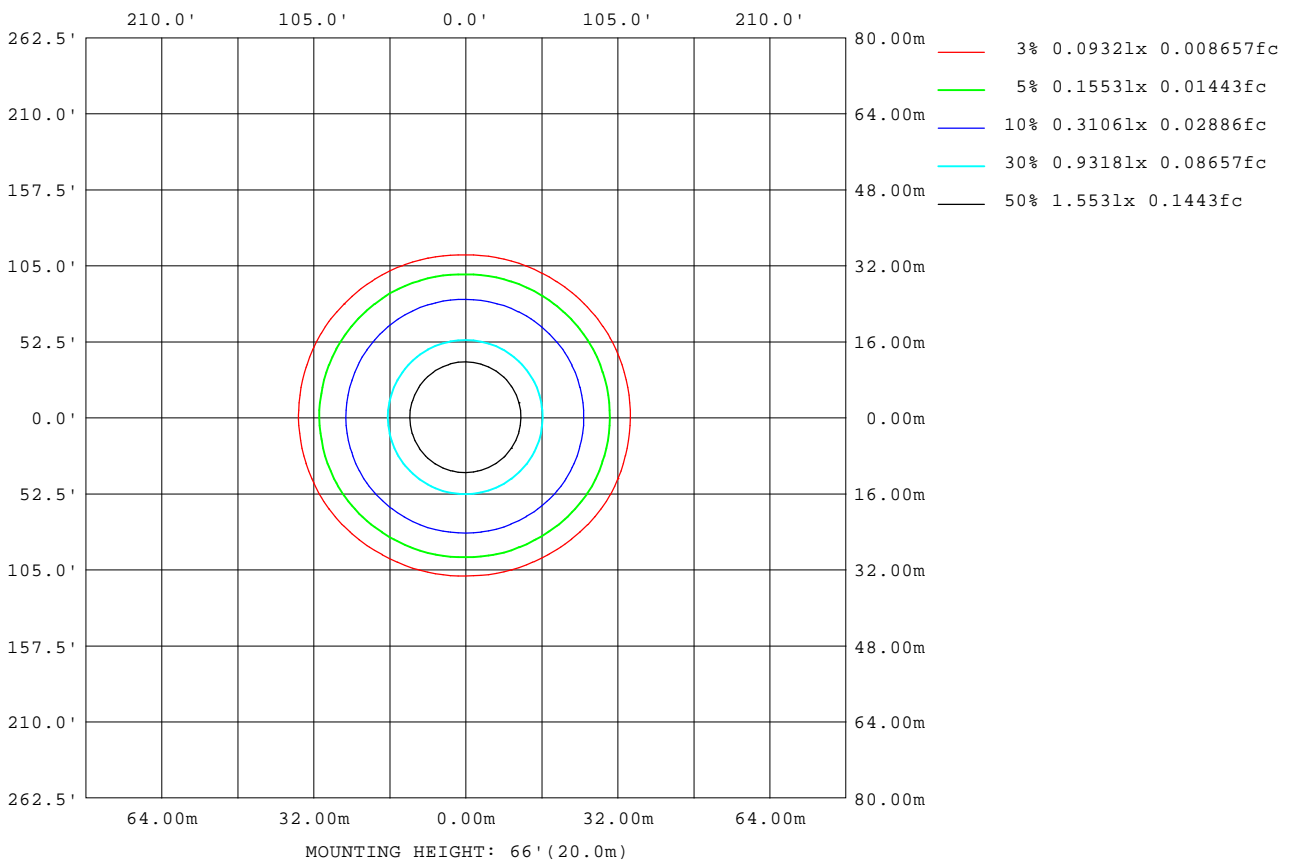

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2414]
 Remarks:

LED Avg.L Report

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	34426
L_0~180(75)av	17275
L_0~180(85)av	6997
L_90~270(65)av	27919
L_90~270(75)av	11673
L_90~270(85)av	4527
L_45(65)av	31842
L_45(75)av	14559
L_45(85)av	5744

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2414]
Remarks:

Planar Illuminance Curve

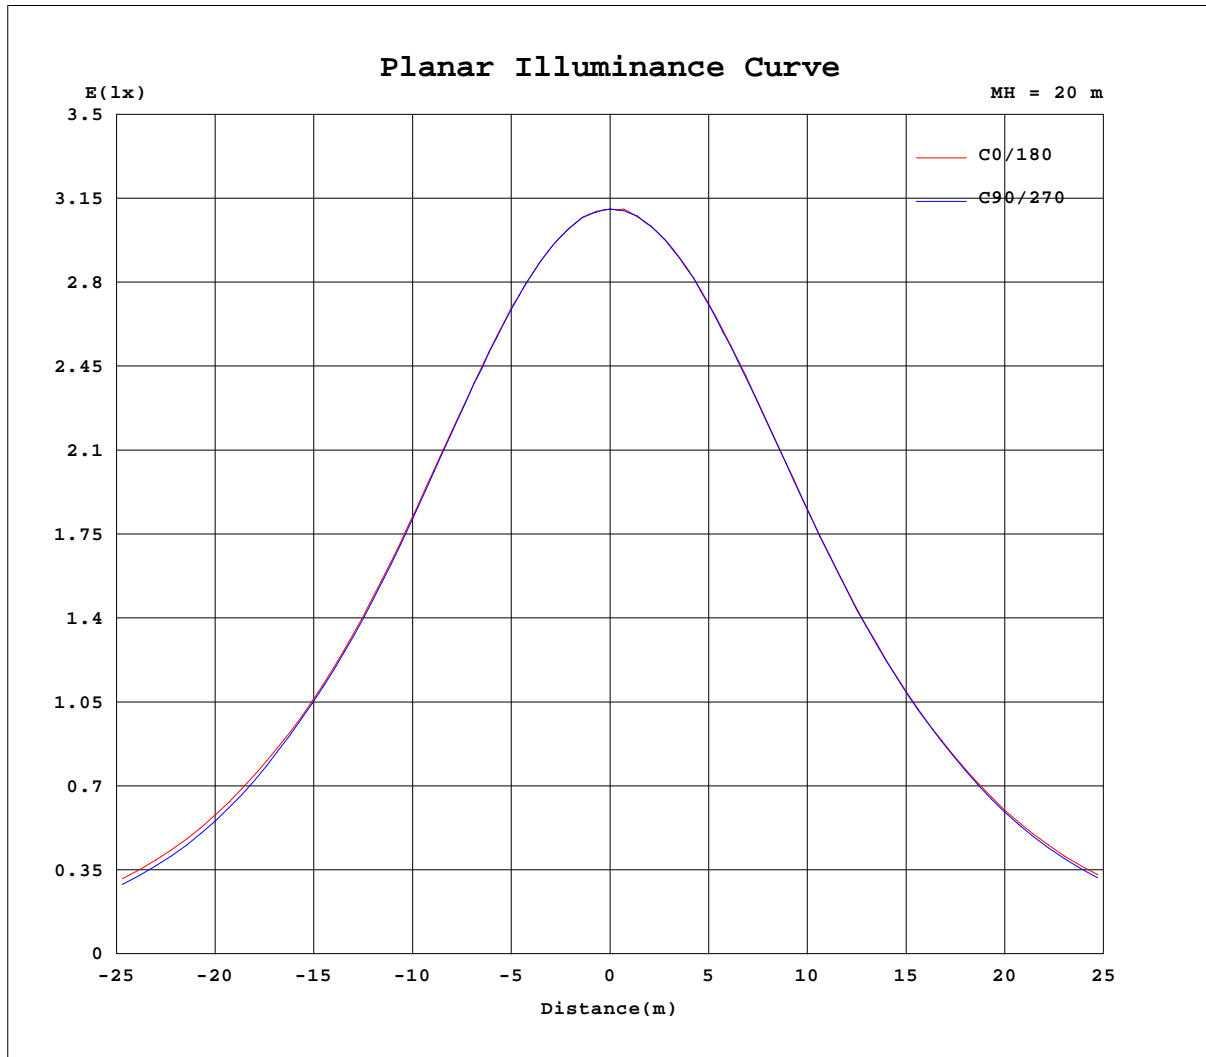

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2414]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.10V I:0.2450A P:28.900W PF:0.9884 Freq:60.00Hz Lamp Flux:2624.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1242	1242	1242	1242	1242	1242	1242	1242	1242	1242	1242	1242						
5	1233	1233	1233	1233	1234	1235	1236	1235	1238	1235	1236	1234						
10	1209	1208	1207	1209	1210	1214	1215	1215	1217	1215	1214	1212						
15	1169	1168	1166	1168	1171	1175	1180	1178	1181	1178	1179	1174						
20	1113	1111	1106	1111	1116	1122	1128	1128	1130	1126	1125	1121						
25	1044	1040	1036	1039	1045	1054	1062	1059	1063	1058	1058	1053						
30	961	955	950	954	962	972	980	981	984	979	977	970						
35	868	862	855	860	870	881	891	891	895	888	885	877						
40	769	765	754	756	769	784	794	794	798	790	787	779						
45	655	649	631	627	646	668	679	684	685	670	669	666						
50	529	524	500	493	512	542	556	560	556	537	540	540						
55	407	401	373	363	382	416	434	436	428	404	411	414						
60	296	291	261	249	265	300	318	320	306	284	291	301						
65	203	196	168	156	169	200	216	219	201	184	190	204						
70	124	118	94.6	85.3	93.2	117	131	132	115	103	110	125						
75	64.5	58.9	43.7	39.0	41.9	56.1	64.3	63.9	52.7	48.0	52.3	64.3						
80	26.4	24.0	20.3	18.8	19.6	23.1	24.7	23.4	23.2	22.3	24.0	26.6						
85	9.42	8.80	5.44	4.40	4.68	7.60	8.15	6.40	7.36	6.96	8.37	9.03						
90	0.20	0.06	0.03	0.02	0.01	0.03	0.07	0.10	0.03	0.08	0.01	0.09						
95	0.07	0.11	0.06	0.15	0.02	0.12	0.21	0.10	0.16	0.05	0.11	0.07						
100	0.26	0.29	0.23	0.34	0.20	0.29	0.41	0.26	0.31	0.21	0.24	0.28						
105	0.50	0.54	0.51	0.60	0.43	0.53	0.67	0.48	0.57	0.48	0.51	0.54						
110	0.79	0.86	0.80	0.90	0.73	0.83	0.99	0.75	0.87	0.80	0.78	0.86						
115	1.14	1.19	1.17	1.28	1.07	1.16	1.36	1.06	1.22	1.20	1.15	1.23						
120	1.51	1.54	1.54	1.72	1.46	1.54	1.72	1.44	1.55	1.62	1.52	1.61						
125	1.90	1.91	1.97	2.09	1.85	1.93	2.13	1.81	1.95	2.03	1.89	1.99						
130	2.25	2.24	2.36	2.53	2.22	2.27	2.53	2.17	2.35	2.42	2.25	2.35						
135	2.56	2.55	2.66	2.85	2.60	2.62	2.89	2.46	2.71	2.74	2.60	2.69						
140	2.79	2.80	2.94	3.13	2.88	2.90	3.16	2.78	3.00	3.04	2.87	3.01						
145	3.07	3.09	3.21	3.38	3.15	3.22	3.41	3.11	3.22	3.36	3.18	3.24						
150	3.36	3.36	3.44	3.66	3.40	3.45	3.65	3.36	3.47	3.55	3.46	3.48						
155	3.63	3.65	3.72	3.83	3.66	3.83	3.92	3.63	3.74	3.73	3.67	3.72						
160	3.85	3.88	3.96	4.01	3.87	4.12	4.17	3.87	3.99	3.99	3.88	3.97						
165	4.12	4.19	4.20	4.26	4.10	4.28	4.42	4.10	4.21	4.22	4.11	4.13						
170	4.34	4.38	4.38	4.43	4.29	4.46	4.54	4.23	4.39	4.35	4.32	4.34						
175	4.60	4.71	4.67	4.60	4.55	4.61	4.69	4.50	4.71	4.50	4.56	4.59						
180	4.71	4.90	4.84	4.77	4.73	4.77	4.79	4.59	4.88	4.73	4.74	4.78						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2414]
 Remarks: