
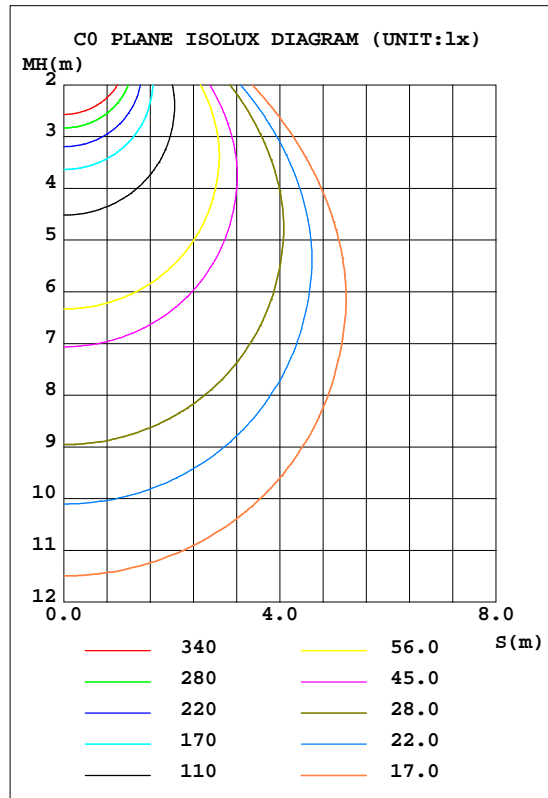


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 82.79 lm/W			
ASMODEL7-10DA60AC(60W 3000K)		I _{max} (cd)	2249	S/MH(C0/180)	1.18
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	4876.2	h UP, DN(C0-180)	0.2,50.5
NOMINAL FLUX(lm)	4876.23	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

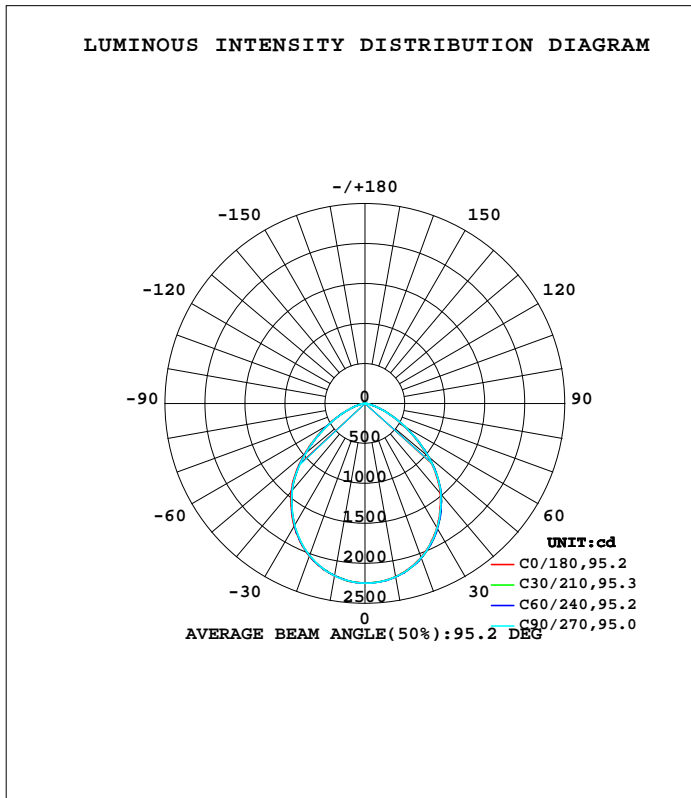

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2529]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	2196	2202	2202	2196	2190	2187	2186	2193	0- 10	212.0	212.0	4.35,4.35
20	2048	2057	2053	2039	2033	2026	2024	2038	10- 20	600.2	812.2	16.7,16.7
30	1795	1810	1803	1780	1771	1763	1759	1779	20- 30	884.7	1697	34.8,34.8
40	1466	1485	1478	1449	1439	1419	1417	1443	30- 40	1013	2710	55.6,55.6
50	1024	1046	1040	1008	990.7	973.1	970.8	1002	40- 50	953.0	3663	75.1,75.1
60	560.9	575.9	573.0	547.6	539.5	523.6	522.9	546.0	50- 60	688.0	4351	89.2,89.2
70	222.5	226.5	222.8	208.7	204.0	199.6	202.1	213.7	60- 70	362.9	4714	96.7,96.7
80	52.61	51.72	48.29	47.96	48.91	47.95	48.90	50.78	70- 80	119.6	4833	99.1,99.1
90	0.5272	0.2973	0.2260	0.2133	0.2431	0.2695	0.2760	0.2836	80- 90	22.00	4855	99.6,99.6
100	0.7269	0.7150	0.7782	0.6853	0.8206	0.8113	0.7603	0.7608	90-100	0.4844	4856	99.6,99.6
110	1.730	1.689	1.765	1.634	1.774	1.823	1.780	1.743	100-110	1.282	4857	99.6,99.6
120	2.976	2.902	2.977	2.859	3.038	3.078	3.076	2.984	110-120	2.328	4860	99.7,99.7
130	4.323	4.202	4.282	4.121	4.409	4.403	4.372	4.313	120-130	3.255	4863	99.7,99.7
140	5.395	5.264	5.461	5.207	5.421	5.407	5.476	5.337	130-140	3.737	4867	99.8,99.8
150	6.306	6.222	6.405	6.227	6.324	6.419	6.387	6.257	140-150	3.649	4870	99.9,99.9
160	7.192	7.184	7.267	7.100	7.236	7.393	7.356	7.193	150-160	3.115	4873	99.9,99.9
170	8.029	8.099	8.178	7.920	8.130	8.262	8.285	8.187	160-170	2.172	4875	100,100
180	8.632	8.731	8.695	8.450	8.624	8.781	8.712	8.730	170-180	0.7968	4876	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-08

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2529]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

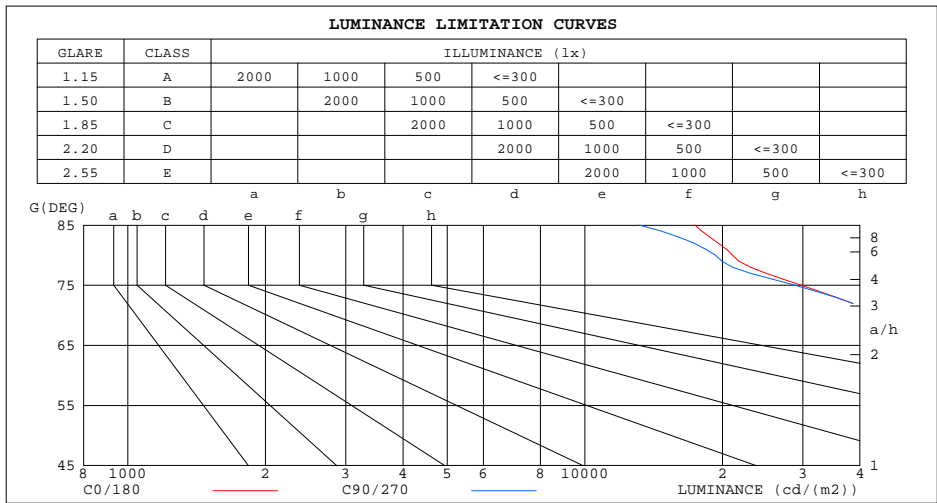

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	17420	13163
80	21033	19314
75	29737	28805
70	45170	45237
65	61021	62293
60	77872	79581
55	94987	96650
50	110576	112377
45	123688	125060


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2529]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.60	.54	.68	.60	.54	.65	.59	.54	.63	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

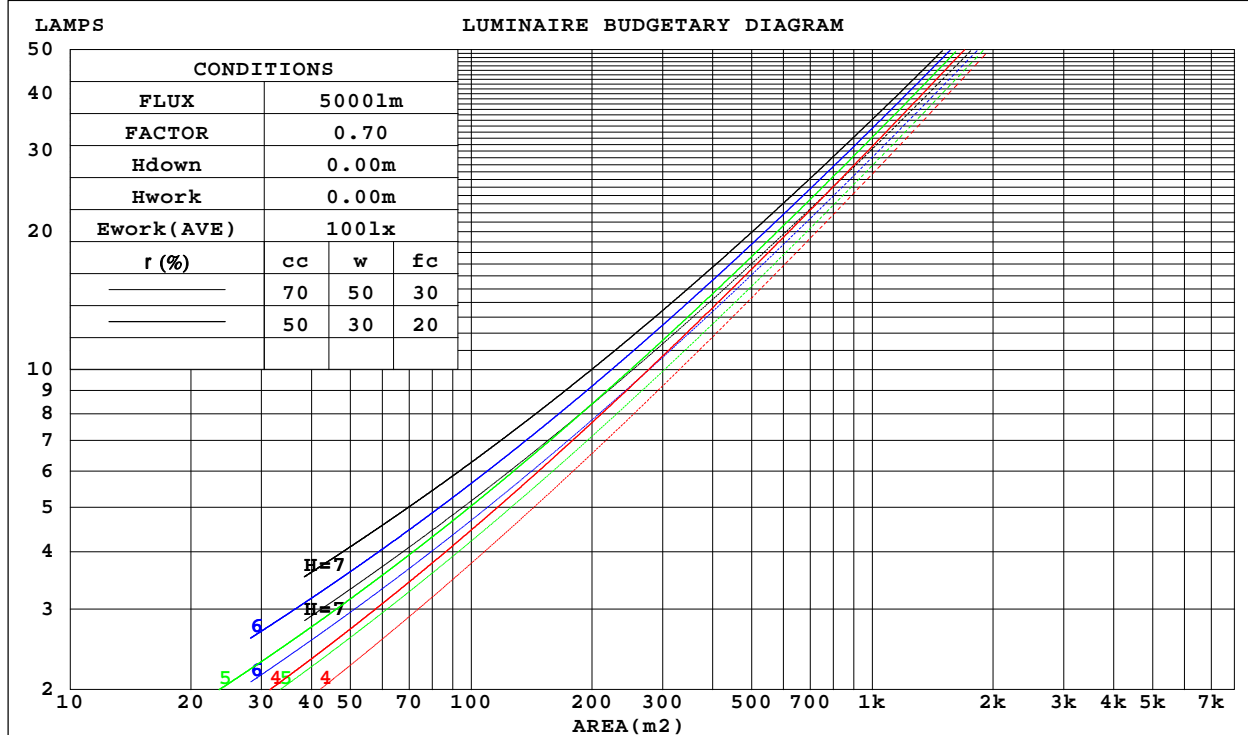

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2529]
 Remarks:

WEC AND CCEC

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.255	.145	.046	.248	.141	.045	.234	.134	.043	.222	.128	.041	.211	.122	.039	
2.0	.247	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.091	.026	.180	.090	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021	
10.0	.154	.074	.020	.152	.073	.020	.147	.072	.020	.143	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.135	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.029	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2529]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.3	28.8	27.7	29.1	29.4	27.1	28.6	27.5	28.9	29.3
3H	28.1	29.4	28.5	29.7	30.1	27.9	29.2	28.3	29.6	29.9
4H	28.2	29.4	28.6	29.8	30.2	28.0	29.3	28.5	29.6	30.0
6H	28.2	29.4	28.7	29.8	30.2	28.1	29.2	28.5	29.6	30.0
8H	28.2	29.3	28.7	29.7	30.1	28.1	29.1	28.5	29.5	29.9
12H	28.2	29.3	28.7	29.7	30.1	28.0	29.1	28.5	29.5	29.9
4H 2H	27.6	28.8	28.0	29.2	29.6	27.4	28.6	27.8	29.0	29.4
3H	28.5	29.5	28.9	29.9	30.3	28.3	29.3	28.7	29.7	30.1
4H	28.7	29.6	29.1	30.0	30.5	28.5	29.4	28.9	29.8	30.3
6H	28.8	29.6	29.3	30.0	30.5	28.5	29.3	29.0	29.8	30.2
8H	28.8	29.5	29.3	30.0	30.5	28.5	29.3	29.0	29.7	30.2
12H	28.8	29.4	29.3	29.9	30.4	28.5	29.2	29.0	29.7	30.1
8H 4H	28.7	29.4	29.2	29.9	30.4	28.5	29.2	29.0	29.7	30.1
6H	28.8	29.4	29.3	29.9	30.4	28.6	29.2	29.1	29.7	30.1
8H	28.9	29.4	29.4	29.9	30.4	28.6	29.1	29.1	29.6	30.1
12H	28.9	29.4	29.4	29.9	30.4	28.6	29.0	29.1	29.5	30.1
12H 4H	28.7	29.3	29.2	29.8	30.3	28.5	29.1	28.9	29.6	30.1
6H	28.8	29.3	29.3	29.8	30.4	28.5	29.1	29.1	29.5	30.1
8H	28.9	29.3	29.4	29.8	30.4	28.6	29.0	29.1	29.5	30.1
CIE190: 2010										

CIE190: 2010
 Area: 0.0144 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2529]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	46	62	52	46	40
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	92	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2529]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

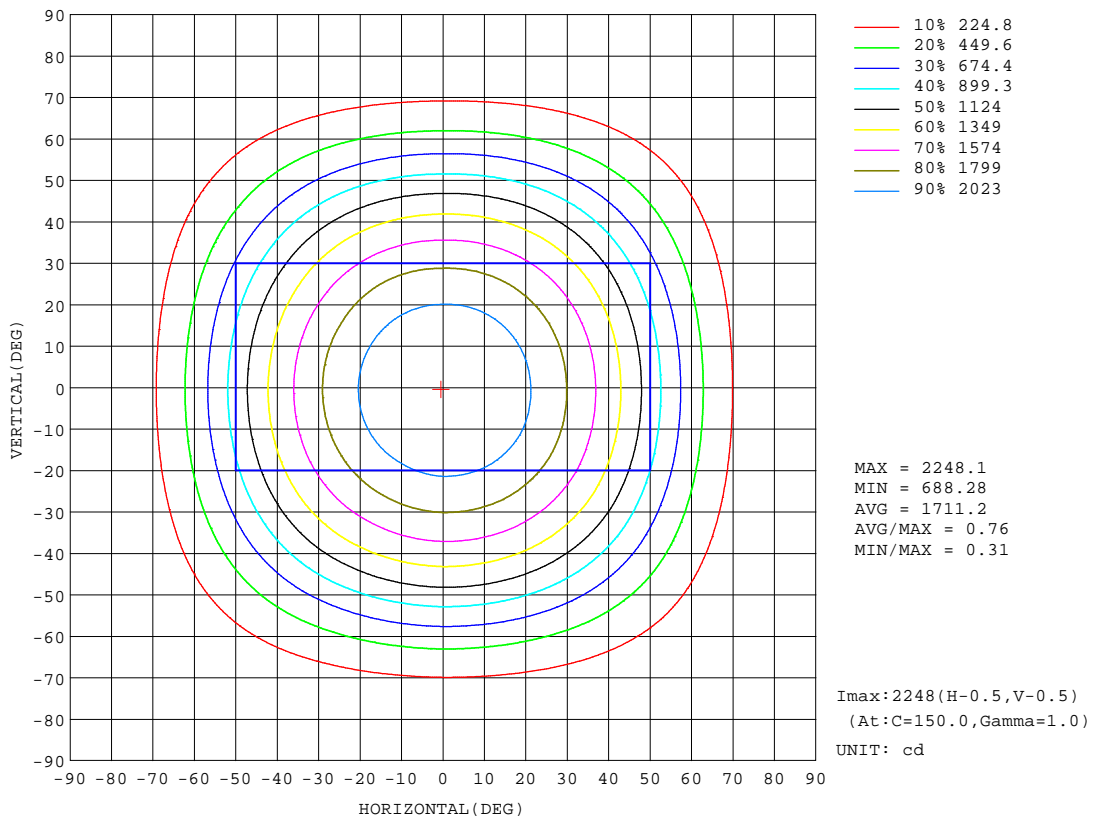


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2529]
 Remarks:

AAI Figure

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:3488 lm

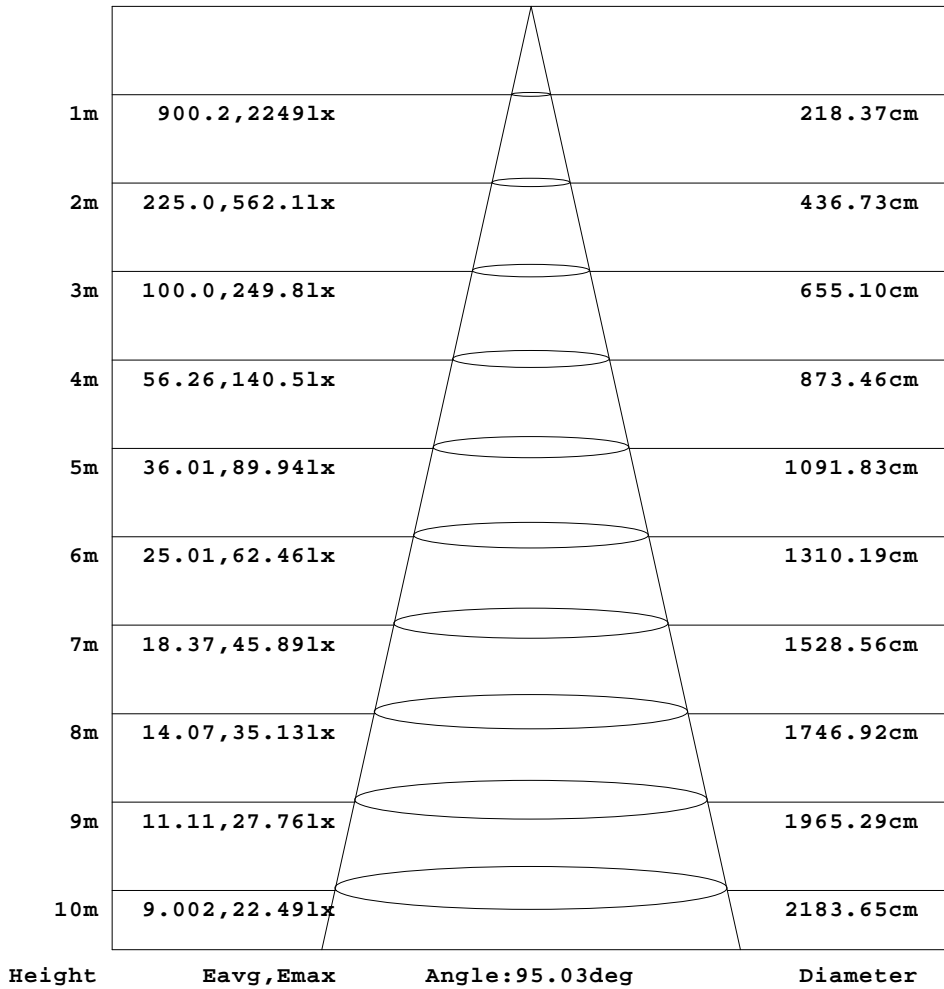


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2529]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

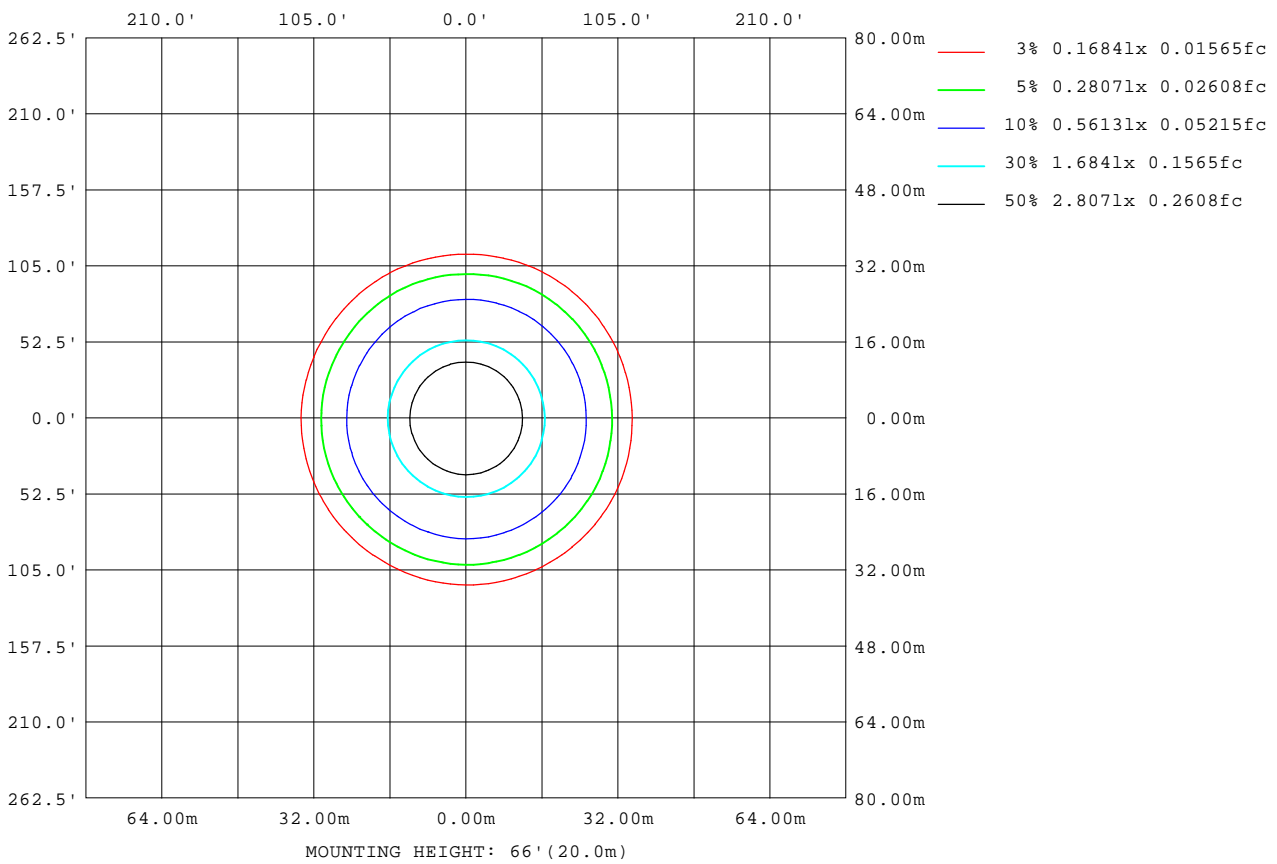

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2529]
 Remarks:

LED Avg.L Report

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	59445
L_0~180(75)av	28161
L_0~180(85)av	16177
L_90~270(65)av	59343
L_90~270(75)av	27883
L_90~270(85)av	13129
L_45(65)av	59326
L_45(75)av	28099
L_45(85)av	14404

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-08

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2529]
Remarks:

Planar Illuminance Curve

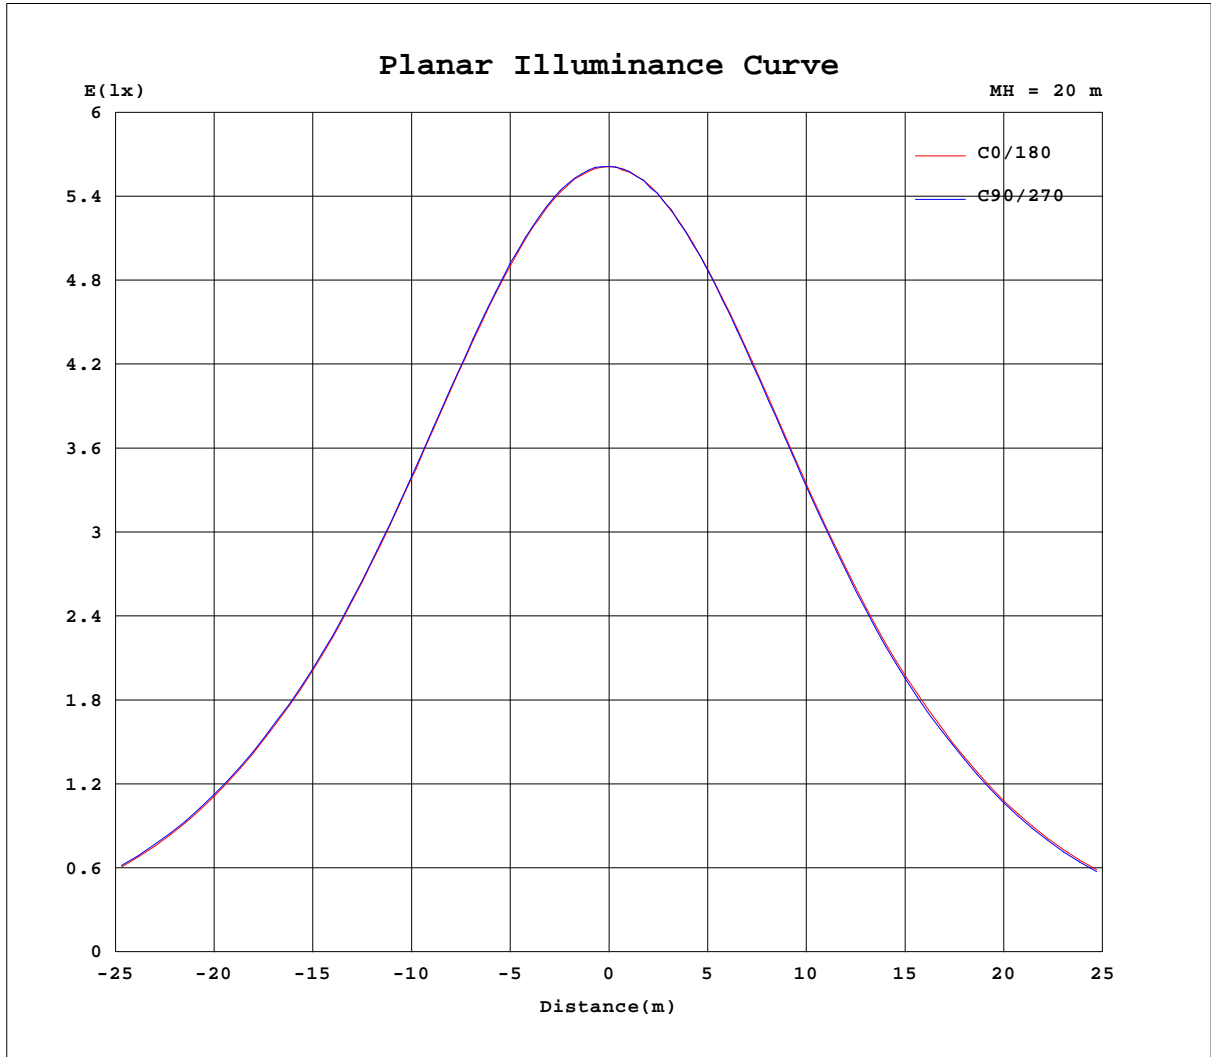

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2529]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.99V I:0.4980A P:58.900W PF:0.9851 Freq:60.00Hz Lamp Flux:4876.23x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2246	2246	2246	2246	2246	2246	2246	2246	2246	2246	2246	2246						
5	2237	2236	2237	2238	2234	2236	2233	2226	2230	2232	2231	2236						
10	2196	2201	2203	2202	2196	2196	2190	2186	2187	2186	2190	2196						
15	2135	2144	2145	2140	2132	2129	2124	2118	2117	2120	2126	2131						
20	2048	2057	2057	2053	2040	2037	2033	2026	2025	2024	2032	2044						
25	1935	1947	1948	1938	1922	1917	1912	1906	1907	1905	1918	1925						
30	1795	1810	1810	1803	1783	1778	1771	1762	1764	1759	1773	1785						
35	1637	1653	1653	1645	1622	1614	1607	1597	1596	1592	1609	1622						
40	1466	1485	1485	1478	1453	1445	1439	1417	1420	1417	1434	1451						
45	1260	1279	1278	1273	1247	1237	1224	1207	1208	1208	1229	1245						
50	1024	1049	1042	1040	1013	1003	991	973	973	971	995	1010						
55	785	804	802	798	772	764	756	738	739	734	760	772						
60	561	577	574	573	551	544	540	521	526	523	541	551						
65	371	384	380	379	361	357	352	340	345	343	358	364						
70	223	227	226	223	211	207	204	198	202	202	211	216						
75	111	114	110	107	101	100	99.0	97.1	100	100	106	108						
80	52.6	53.3	50.1	48.3	47.2	48.8	48.9	46.3	49.6	48.9	51.5	50.1						
85	21.9	22.2	18.3	16.5	16.0	18.5	18.7	15.0	17.4	16.4	19.3	18.2						
90	0.53	0.37	0.23	0.23	0.20	0.23	0.24	0.28	0.26	0.28	0.24	0.32						
95	0.39	0.45	0.33	0.44	0.31	0.44	0.49	0.42	0.48	0.41	0.45	0.38						
100	0.73	0.79	0.64	0.78	0.61	0.76	0.82	0.79	0.83	0.76	0.79	0.73						
105	1.20	1.23	1.09	1.20	1.06	1.19	1.26	1.26	1.30	1.23	1.25	1.15						
110	1.73	1.76	1.62	1.77	1.57	1.70	1.77	1.82	1.82	1.78	1.78	1.70						
115	2.35	2.37	2.23	2.38	2.17	2.32	2.39	2.45	2.46	2.42	2.39	2.32						
120	2.98	2.95	2.85	2.98	2.76	2.96	3.04	3.08	3.07	3.08	3.00	2.97						
125	3.69	3.57	3.54	3.63	3.37	3.66	3.75	3.77	3.76	3.74	3.67	3.64						
130	4.32	4.23	4.17	4.28	3.96	4.28	4.41	4.42	4.38	4.37	4.31	4.31						
135	4.98	4.76	4.72	4.87	4.51	4.86	4.94	4.97	4.92	4.96	4.91	4.82						
140	5.39	5.26	5.27	5.46	5.05	5.36	5.42	5.43	5.38	5.48	5.37	5.31						
145	5.87	5.76	5.76	5.93	5.55	5.84	5.85	6.04	5.86	5.95	5.76	5.81						
150	6.31	6.20	6.25	6.41	6.12	6.34	6.32	6.54	6.30	6.39	6.23	6.29						
155	6.73	6.68	6.70	6.83	6.58	6.81	6.77	6.99	6.81	6.72	6.70	6.78						
160	7.19	7.17	7.20	7.27	7.03	7.17	7.24	7.50	7.29	7.36	7.16	7.22						
165	7.59	7.57	7.75	7.81	7.47	7.57	7.71	8.00	7.79	7.96	7.74	7.72						
170	8.03	8.01	8.19	8.18	7.86	7.98	8.13	8.39	8.13	8.29	8.21	8.17						
175	8.40	8.41	8.55	8.53	8.21	8.39	8.45	8.74	8.46	8.51	8.54	8.52						
180	8.63	8.70	8.76	8.70	8.46	8.44	8.62	8.81	8.75	8.71	8.65	8.81						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2529]
 Remarks: