
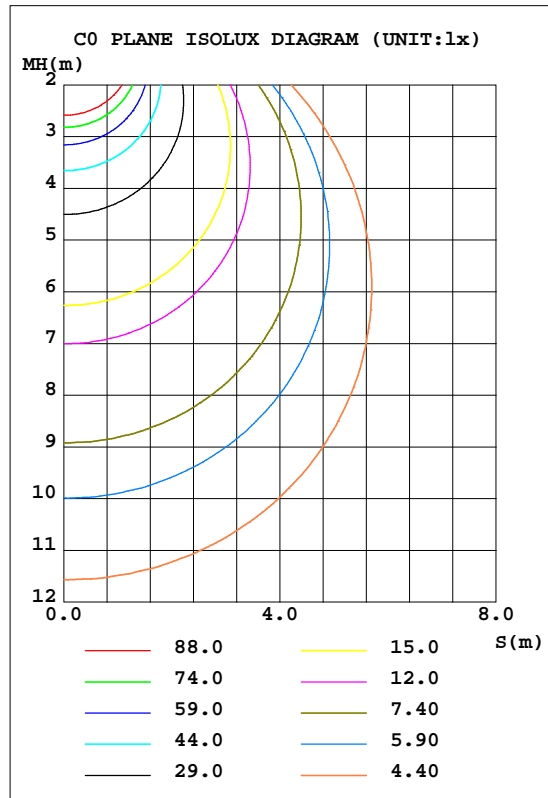


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.91 lm/W			
MOBESD-JBS-8D20AC-WH(3000K)		I _{max} (cd)	589.7	S/MH(C0/180)	1.25
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1694.9	h UP, DN(C0-180)	0.2,50.2
NOMINAL FLUX(lm)	1694.92	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

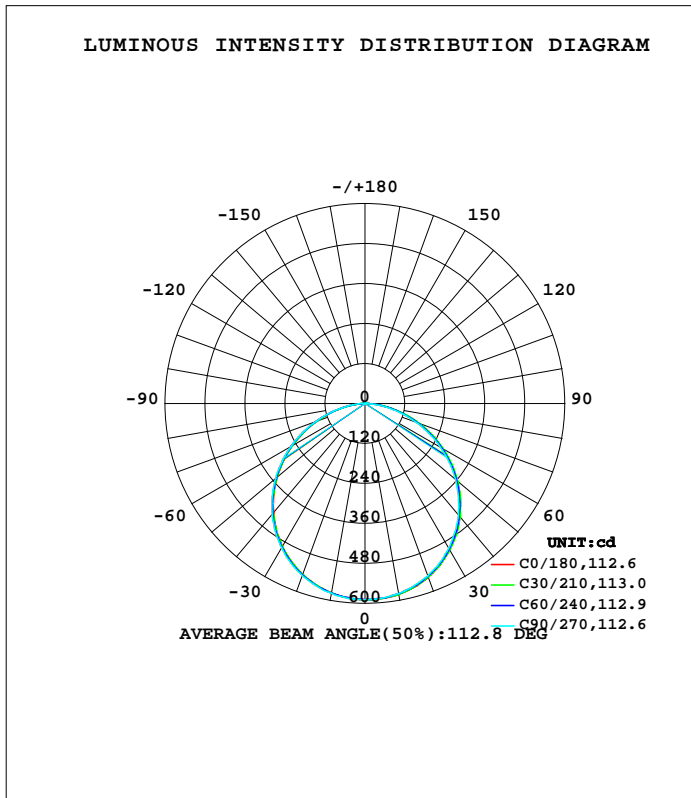

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9070]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	581.6	580.8	579.3	576.7	577.6	577.6	579.0	580.9	0- 10	55.75	55.75	3.29,3.29
20	554.9	553.3	550.7	546.3	545.6	547.2	550.3	552.7	10- 20	160.1	215.8	12.7,12.7
30	508.2	507.1	502.3	496.1	495.5	497.6	501.0	505.6	20- 30	243.4	459.2	27.1,27.1
40	442.3	441.9	436.4	428.7	426.9	430.2	434.0	439.6	30- 40	294.2	753.4	44.5,44.5
50	361.9	361.7	354.7	346.9	344.6	346.9	350.6	357.7	40- 50	305.2	1059	62.5,62.5
60	268.4	268.7	261.6	253.4	250.7	253.1	256.0	264.5	50- 60	274.7	1333	78.7,78.7
70	168.6	168.8	161.0	153.5	151.6	153.6	156.3	163.9	60- 70	207.7	1541	90.9,90.9
80	74.05	73.10	64.99	59.68	59.75	59.63	61.97	66.25	70- 80	117.4	1658	97.8,97.8
90	3.418	1.140	0.1715	0.1971	0.2403	0.2728	0.2444	0.7470	80- 90	29.16	1688	99.6,99.6
100	0.3726	0.4480	0.4369	0.4560	0.5534	0.5608	0.5006	0.5095	90-100	0.4048	1688	99.6,99.6
110	0.7025	0.7255	0.7709	0.7682	0.9433	0.9160	0.8773	0.8647	100-110	0.6796	1689	99.6,99.6
120	1.037	1.057	1.096	1.111	1.329	1.273	1.241	1.220	110-120	0.9853	1690	99.7,99.7
130	1.324	1.338	1.396	1.402	1.621	1.562	1.507	1.498	120-130	1.178	1691	99.8,99.8
140	1.573	1.569	1.632	1.622	1.852	1.789	1.725	1.729	130-140	1.215	1692	99.8,99.8
150	1.826	1.800	1.884	1.881	2.071	1.988	1.952	1.935	140-150	1.128	1693	99.9,99.9
160	2.040	2.048	2.094	2.115	2.212	2.196	2.136	2.153	150-160	0.9314	1694	99.9,99.9
170	2.280	2.311	2.334	2.322	2.400	2.393	2.380	2.327	160-170	0.6315	1695	100,100
180	2.490	2.500	2.453	2.464	2.499	2.474	2.488	2.478	170-180	0.2288	1695	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9070]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

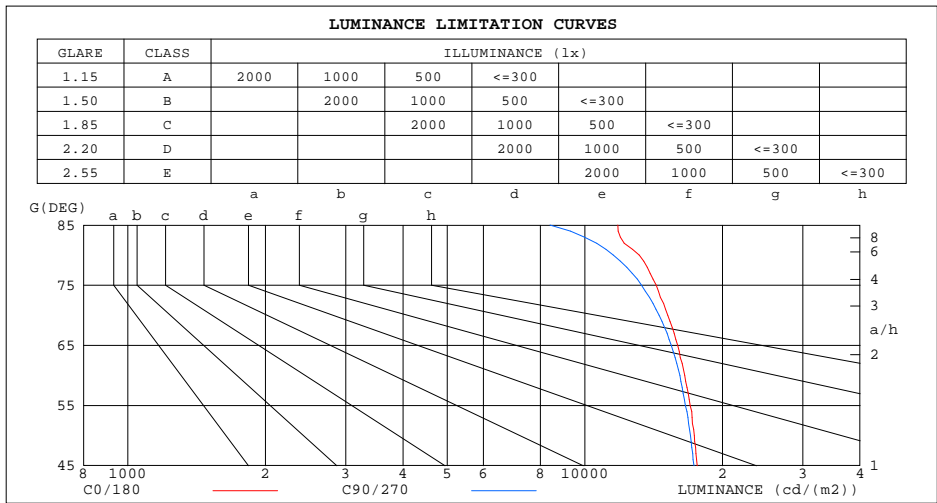

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11812	8392
80	13148	11552
75	14327	13305
70	15201	14531
65	15956	15455
60	16551	16148
55	17000	16609
50	17359	17034
45	17621	17332


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9070]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

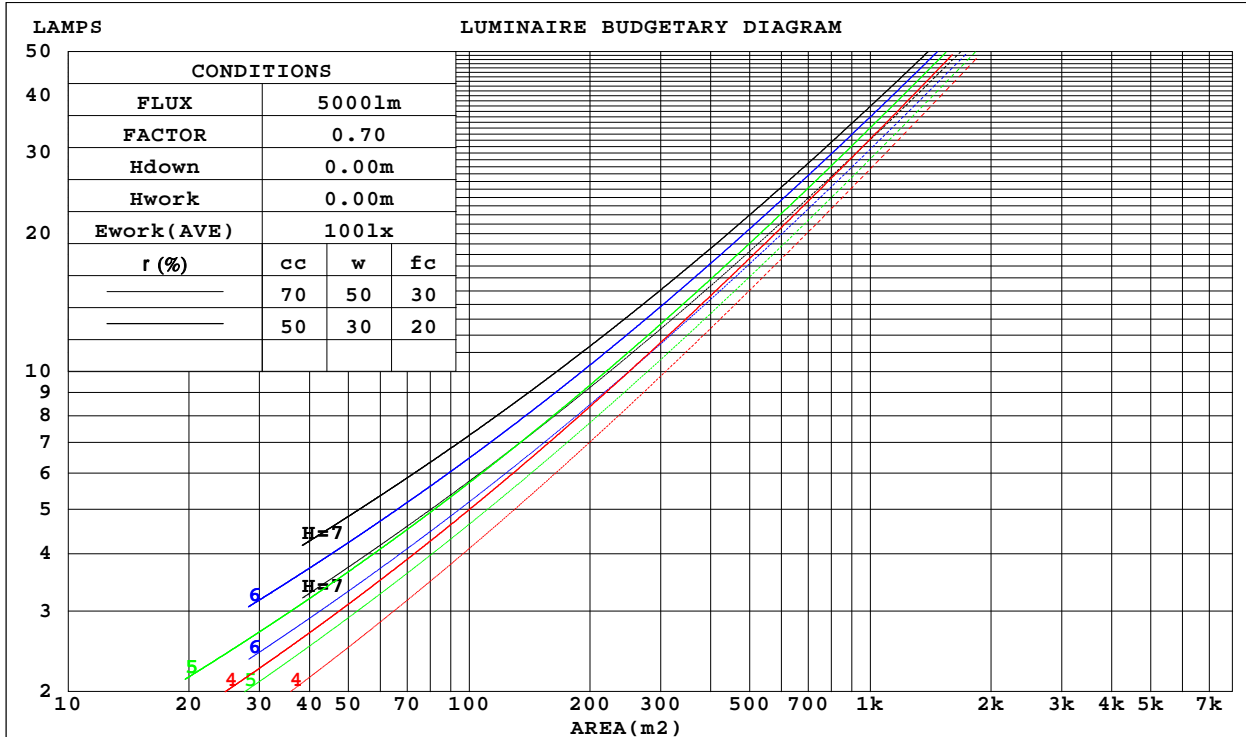

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9070]
 Remarks:

WEC AND CCEC

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.171	.054	.287	.165	.053	.275	.158	.051	.263	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.272	.151	.047	.261	.147	.046	.251	.142	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.243	.133	.041	.234	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.029	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.186	.091	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.138	.157	.137	.119	.107	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.175	.135	.102	.150	.116	.088	.103	.081	.061	.059	.047	.036	.019	.015	.012	
3.0	.168	.118	.078	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.062	.137	.090	.054	.094	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.051	.131	.081	.044	.090	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.043	.125	.074	.037	.086	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.119	.068	.032	.082	.048	.023	.048	.028	.013	.015	.009	.004	
8.0	.132	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.029	.109	.059	.025	.075	.041	.018	.044	.025	.011	.014	.008	.004	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9070]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.18*0.18			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.8	22.5	24.1	24.4	21.8	23.5	22.2	23.8	24.1
3H	24.0	25.5	24.4	25.8	26.2	23.6	25.1	24.0	25.4	25.8
4H	24.7	26.1	25.1	26.5	26.8	24.3	25.7	24.7	26.0	26.4
6H	25.2	26.5	25.7	26.9	27.3	24.7	26.0	25.2	26.4	26.8
8H	25.4	26.6	25.8	27.0	27.4	24.9	26.1	25.3	26.5	26.9
12H	25.5	26.7	26.0	27.1	27.5	24.9	26.1	25.4	26.5	27.0
4H 2H	22.8	24.2	23.2	24.5	24.9	22.4	23.8	22.8	24.2	24.6
3H	24.9	26.0	25.3	26.5	26.9	24.4	25.6	24.8	26.0	26.4
4H	25.7	26.8	26.2	27.2	27.6	25.2	26.2	25.6	26.7	27.1
6H	26.4	27.3	26.9	27.8	28.2	25.8	26.7	26.2	27.1	27.6
8H	26.6	27.5	27.1	27.9	28.4	25.9	26.8	26.4	27.3	27.7
12H	26.8	27.6	27.3	28.0	28.5	26.1	26.8	26.5	27.3	27.8
8H 4H	26.0	26.9	26.5	27.4	27.8	25.5	26.3	25.9	26.8	27.3
6H	26.8	27.6	27.3	28.1	28.5	26.1	26.9	26.6	27.4	27.8
8H	27.2	27.8	27.7	28.3	28.8	26.4	27.0	26.9	27.5	28.0
12H	27.4	28.0	27.9	28.5	29.0	26.5	27.1	27.1	27.6	28.2
12H 4H	26.1	26.8	26.6	27.3	27.8	25.5	26.3	26.0	26.7	27.2
6H	26.9	27.6	27.4	28.0	28.6	26.2	26.8	26.7	27.3	27.9
8H	27.3	27.8	27.8	28.3	28.9	26.5	27.0	27.0	27.5	28.1
CIE190: 2010										

CIE190: 2010
Area: 0.0324 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9070]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	46	39	55	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	101	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9070]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

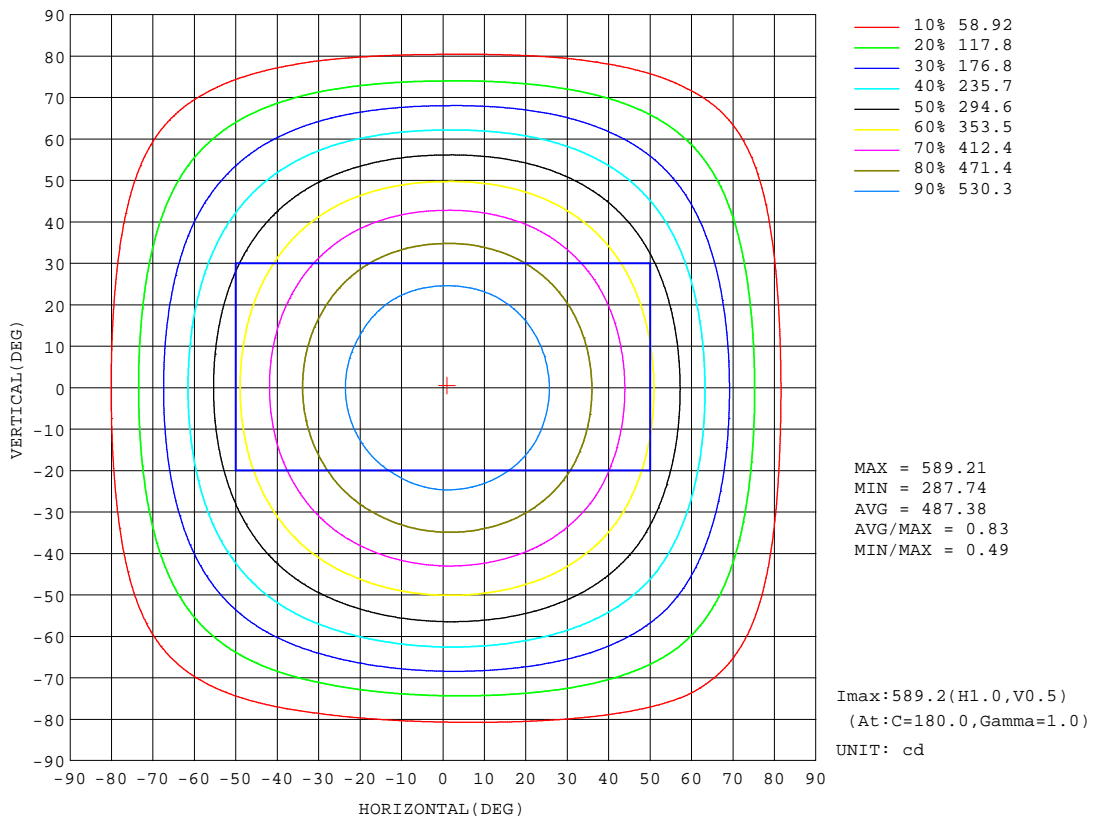


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9070]
 Remarks:

AAI Figure

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

Flux out:1256 lm

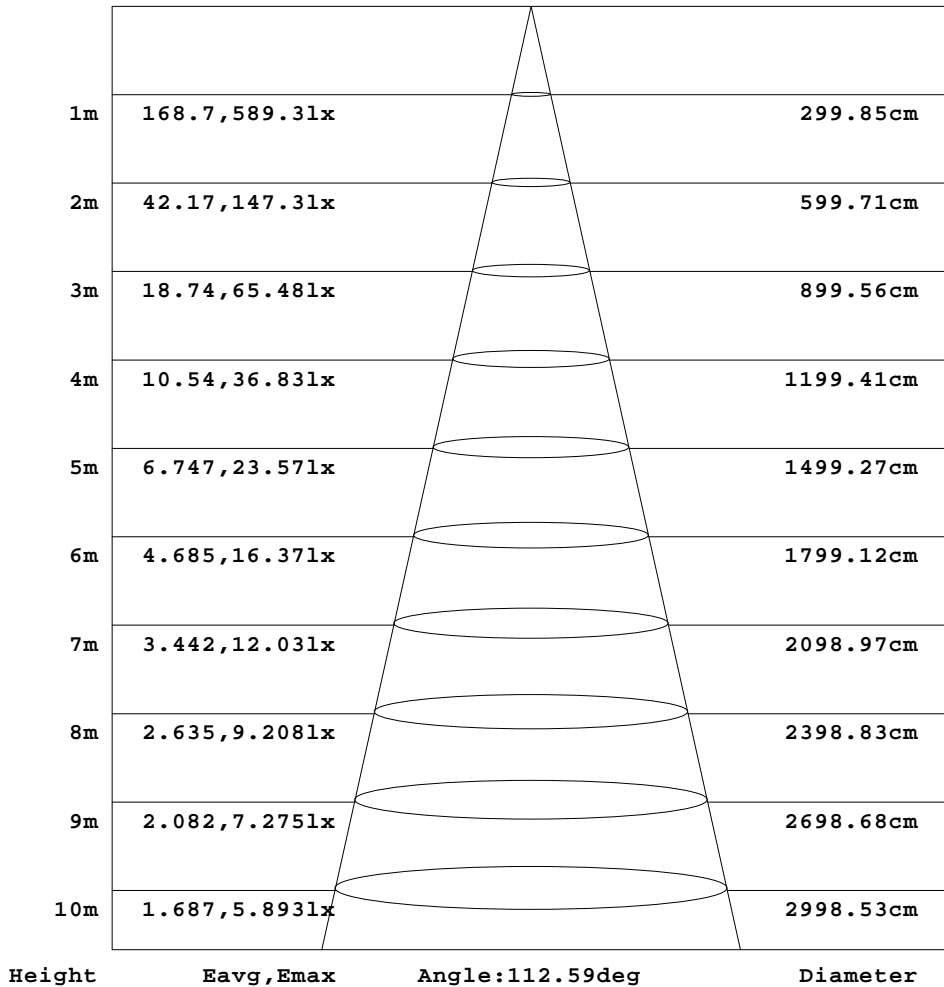


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9070]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

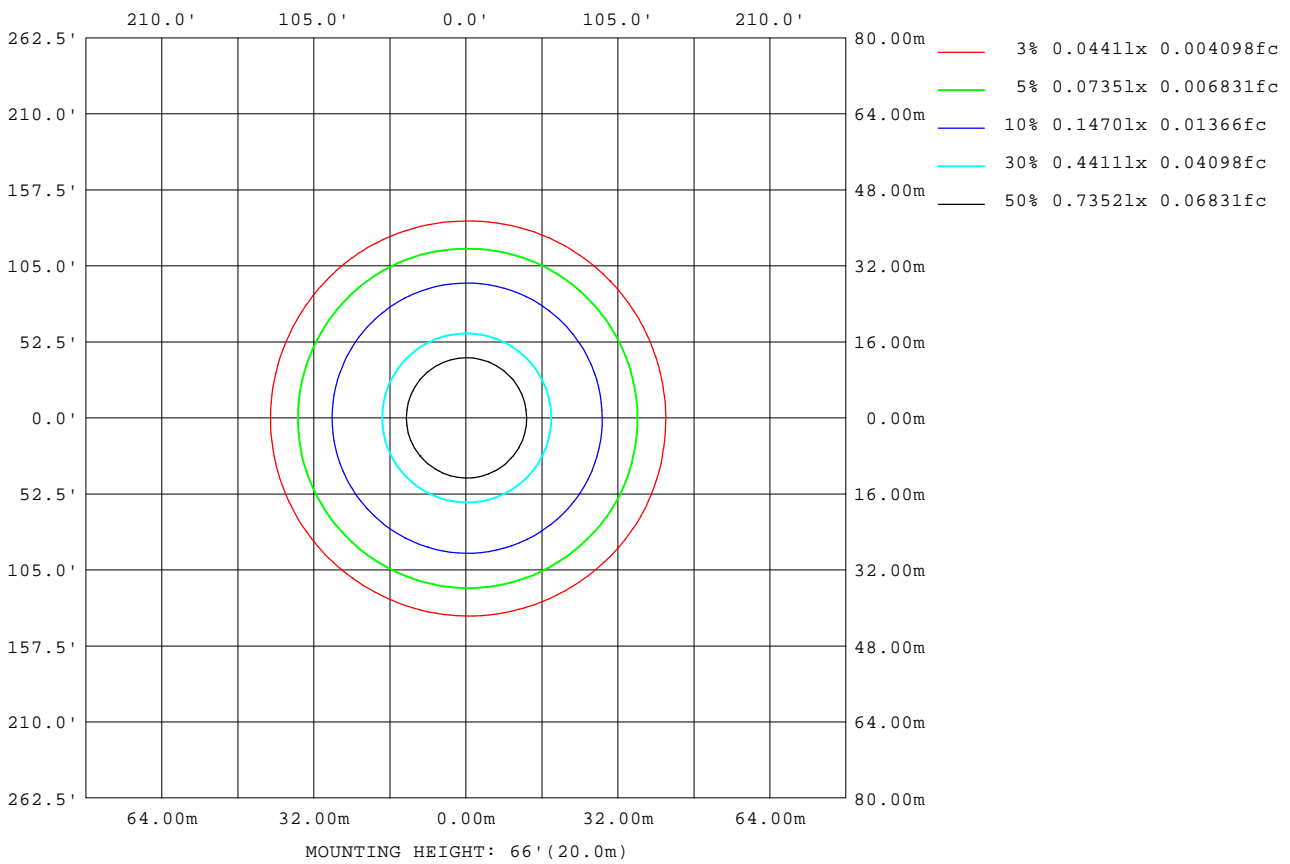

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9070]
 Remarks:

LED Avg.L Report

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15328
L_0~180(75)av	13350
L_0~180(85)av	9736
L_90~270(65)av	15260
L_90~270(75)av	13065
L_90~270(85)av	7943
L_45(65)av	15363
L_45(75)av	13257
L_45(85)av	8700

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9070]
Remarks:

Planar Illuminance Curve

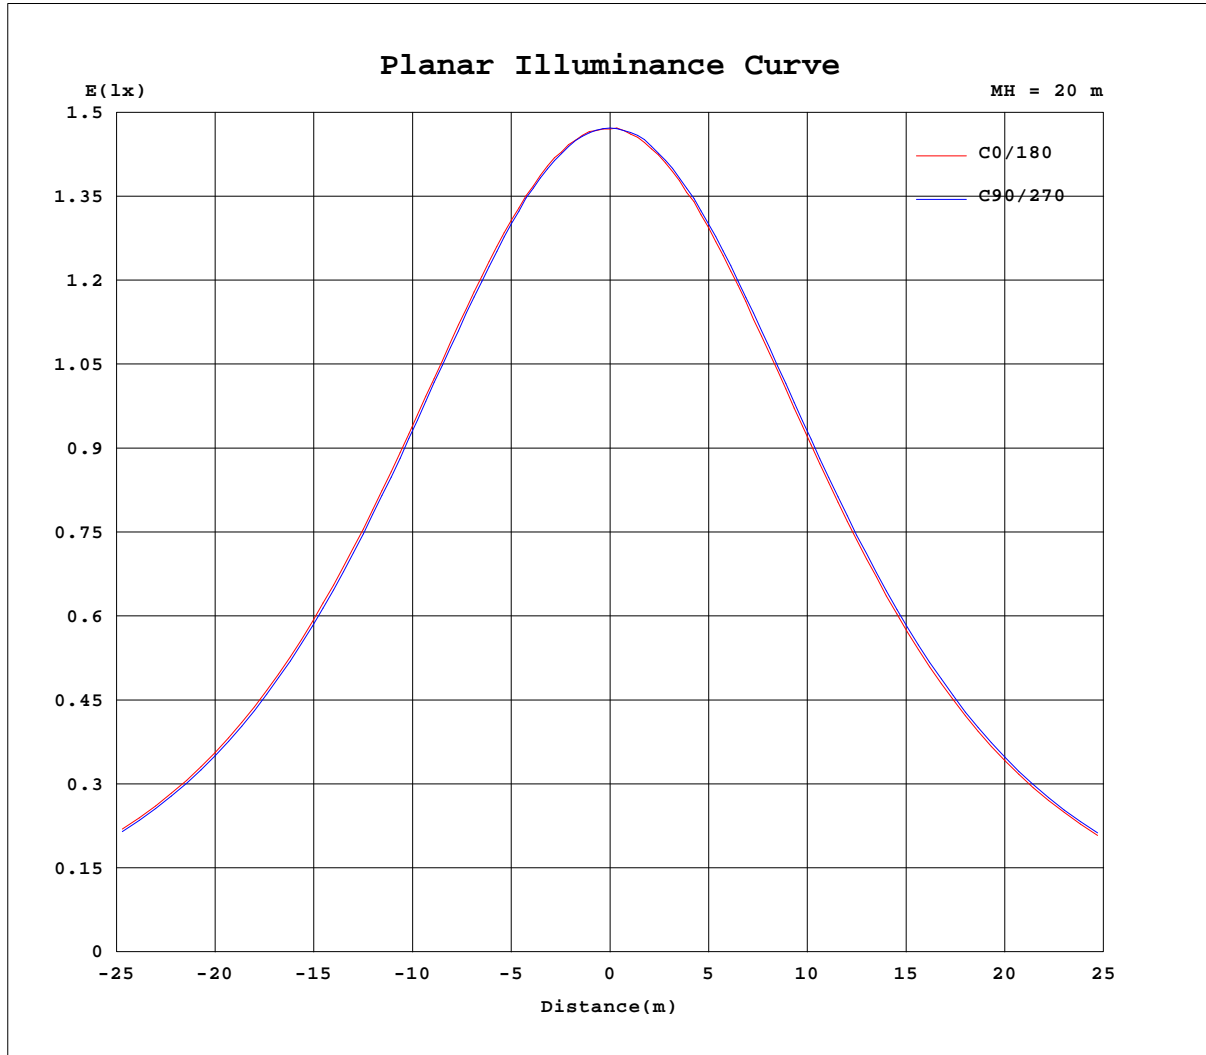

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9070]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.21V I:0.1705A P:20.200W PF:0.9858 Freq:59.98Hz Lamp Flux:1694.92x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	589	589	589	589	589	589	589	589	589	589	589	589						
5	588	588	586	587	586	585	586	586	585	587	587	587						
10	582	582	579	579	577	576	578	578	578	579	581	581						
15	571	570	568	567	565	564	564	564	566	567	569	569						
20	555	555	552	551	547	546	546	546	548	550	552	554						
25	534	534	531	529	524	523	523	524	526	528	531	532						
30	508	509	505	502	497	495	496	496	499	501	505	507						
35	478	479	475	471	466	463	464	464	467	470	473	476						
40	442	444	440	436	430	428	427	429	431	434	439	441						
45	404	406	401	397	391	388	388	389	392	394	399	402						
50	362	364	359	355	349	345	345	345	348	351	356	359						
55	316	319	314	309	303	299	298	299	303	305	310	314						
60	268	271	266	262	255	252	251	251	255	256	263	266						
65	219	222	216	212	205	202	201	201	206	206	213	216						
70	169	172	166	161	155	152	152	152	155	156	162	165						
75	120	122	117	112	106	104	104	104	107	108	112	116						
80	74.1	75.7	70.5	65.0	60.4	59.0	59.7	57.6	61.6	62.0	65.9	66.6						
85	33.4	34.3	28.4	23.7	21.2	21.5	21.6	18.3	21.8	21.2	25.6	25.9						
90	3.42	2.09	0.19	0.17	0.19	0.21	0.24	0.29	0.26	0.24	0.24	1.25						
95	0.22	0.34	0.42	0.31	0.43	0.34	0.39	0.37	0.39	0.35	0.39	0.34						
100	0.37	0.42	0.48	0.44	0.46	0.45	0.55	0.55	0.57	0.50	0.52	0.50						
105	0.52	0.58	0.54	0.60	0.56	0.62	0.75	0.72	0.75	0.69	0.70	0.65						
110	0.70	0.73	0.72	0.77	0.74	0.79	0.94	0.90	0.93	0.88	0.89	0.84						
115	0.87	0.91	0.87	0.94	0.91	0.97	1.13	1.08	1.12	1.04	1.07	1.03						
120	1.04	1.06	1.05	1.10	1.09	1.13	1.33	1.26	1.29	1.24	1.25	1.19						
125	1.20	1.20	1.19	1.25	1.23	1.29	1.47	1.40	1.43	1.39	1.39	1.36						
130	1.32	1.34	1.34	1.40	1.37	1.43	1.62	1.55	1.57	1.51	1.51	1.48						
135	1.46	1.46	1.44	1.52	1.49	1.54	1.74	1.68	1.69	1.63	1.63	1.61						
140	1.57	1.57	1.57	1.63	1.60	1.65	1.85	1.79	1.78	1.73	1.74	1.72						
145	1.71	1.69	1.69	1.79	1.74	1.77	1.95	1.92	1.85	1.84	1.86	1.82						
150	1.83	1.80	1.80	1.88	1.85	1.91	2.07	2.02	1.96	1.95	1.95	1.92						
155	1.93	1.92	1.93	1.99	1.96	2.02	2.15	2.15	2.04	2.05	2.04	2.02						
160	2.04	2.03	2.07	2.09	2.09	2.14	2.21	2.23	2.16	2.14	2.15	2.15						
165	2.13	2.15	2.22	2.24	2.23	2.24	2.32	2.36	2.28	2.28	2.26	2.21						
170	2.28	2.28	2.34	2.33	2.32	2.32	2.40	2.42	2.36	2.38	2.36	2.30						
175	2.37	2.40	2.43	2.42	2.39	2.42	2.45	2.51	2.44	2.46	2.46	2.39						
180	2.49	2.51	2.49	2.45	2.47	2.46	2.50	2.48	2.46	2.49	2.50	2.46						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9070]
 Remarks: