
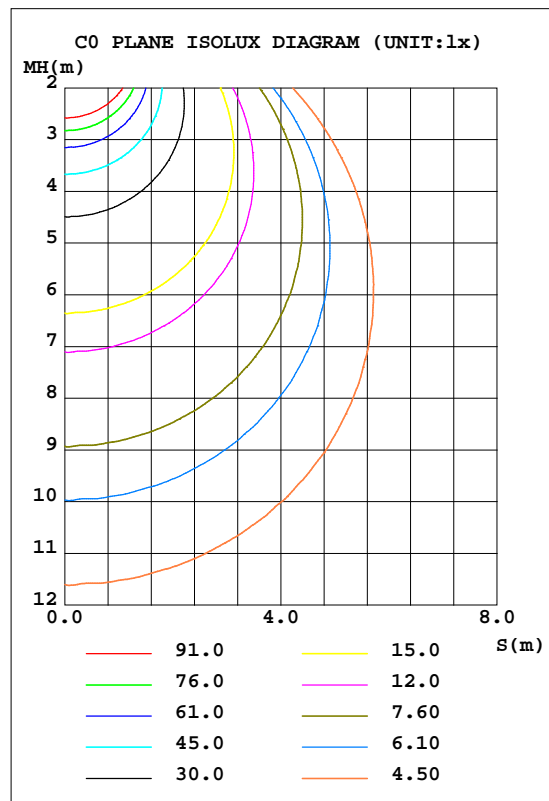


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.63 lm/W			
MOBESD-JBS-8D20AC-WH(3500K)		I <sub>max</sub> (cd)	606.4	S/MH(C0/180)	1.25
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1743.4	h UP, DN(C0-180)	0.2,50.2
NOMINAL FLUX(lm)	1743.35	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

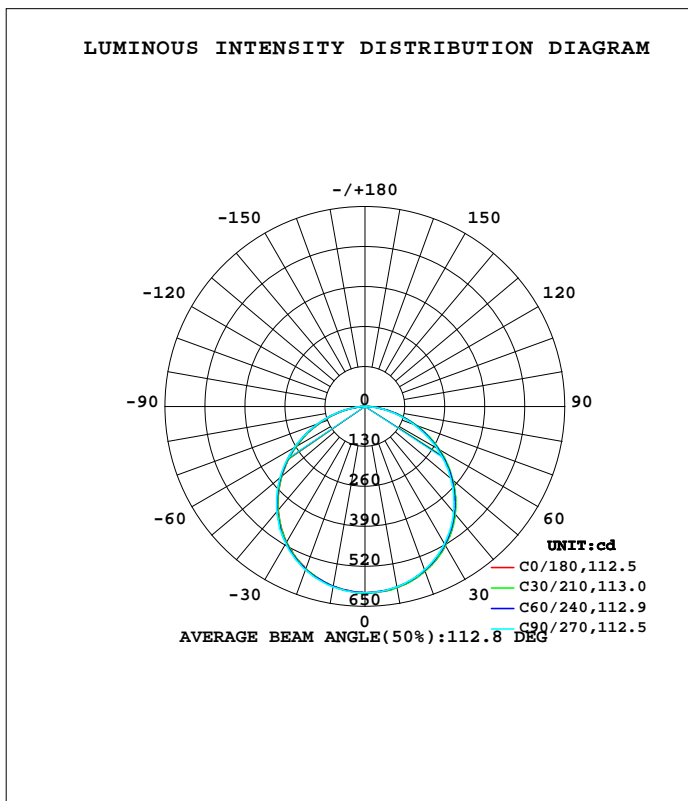

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9186]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	598.1	597.2	596.2	593.3	593.1	594.3	596.1	597.8	0- 10	57.32	57.32	3.29,3.29
20	570.7	569.2	565.0	561.8	561.5	562.6	565.5	568.5	10- 20	164.6	221.9	12.7,12.7
30	522.3	521.4	516.3	510.4	509.7	511.6	514.9	520.0	20- 30	250.3	472.2	27.1,27.1
40	454.3	454.6	448.1	441.4	438.5	441.9	446.3	452.2	30- 40	302.6	774.7	44.4,44.4
50	371.4	372.2	364.9	356.7	353.7	356.8	360.5	368.6	40- 50	313.8	1089	62.4,62.4
60	276.1	276.7	269.8	260.5	257.6	260.1	263.2	271.7	50- 60	282.5	1371	78.6,78.6
70	173.1	174.1	166.4	157.9	155.6	157.9	160.5	168.5	60- 70	213.6	1585	90.9,90.9
80	76.31	75.67	67.90	61.70	61.38	61.18	63.65	68.06	70- 80	120.9	1705	97.8,97.8
90	3.629	1.213	0.1935	0.2242	0.2769	0.2993	0.2684	0.7645	80- 90	30.18	1736	99.6,99.6
100	0.4168	0.4562	0.4573	0.4867	0.5932	0.5774	0.5227	0.5272	90-100	0.4313	1736	99.6,99.6
110	0.7681	0.7705	0.8001	0.8149	0.9797	0.9439	0.9094	0.8896	100-110	0.7134	1737	99.6,99.6
120	1.097	1.115	1.156	1.164	1.344	1.310	1.300	1.252	110-120	1.031	1738	99.7,99.7
130	1.400	1.407	1.468	1.456	1.656	1.592	1.582	1.555	120-130	1.224	1739	99.8,99.8
140	1.625	1.644	1.679	1.700	1.893	1.844	1.828	1.766	130-140	1.259	1740	99.8,99.8
150	1.901	1.890	1.951	1.955	2.104	2.053	2.026	1.992	140-150	1.168	1741	99.9,99.9
160	2.103	2.136	2.180	2.181	2.280	2.276	2.241	2.186	150-160	0.9653	1742	99.9,99.9
170	2.341	2.369	2.430	2.409	2.455	2.474	2.470	2.416	160-170	0.6530	1743	100,100
180	2.547	2.584	2.571	2.546	2.587	2.582	2.580	2.546	170-180	0.2369	1743	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-9

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=0.9186]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

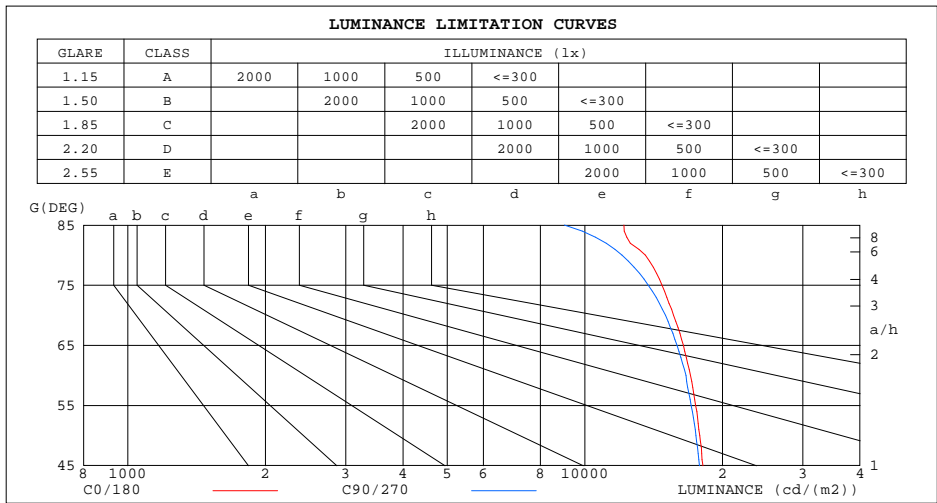

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12176	9025
80	13566	12062
75	14748	13771
70	15623	15012
65	16427	15912
60	17043	16647
55	17485	17099
50	17837	17513
45	18134	17821


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9186]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.26
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

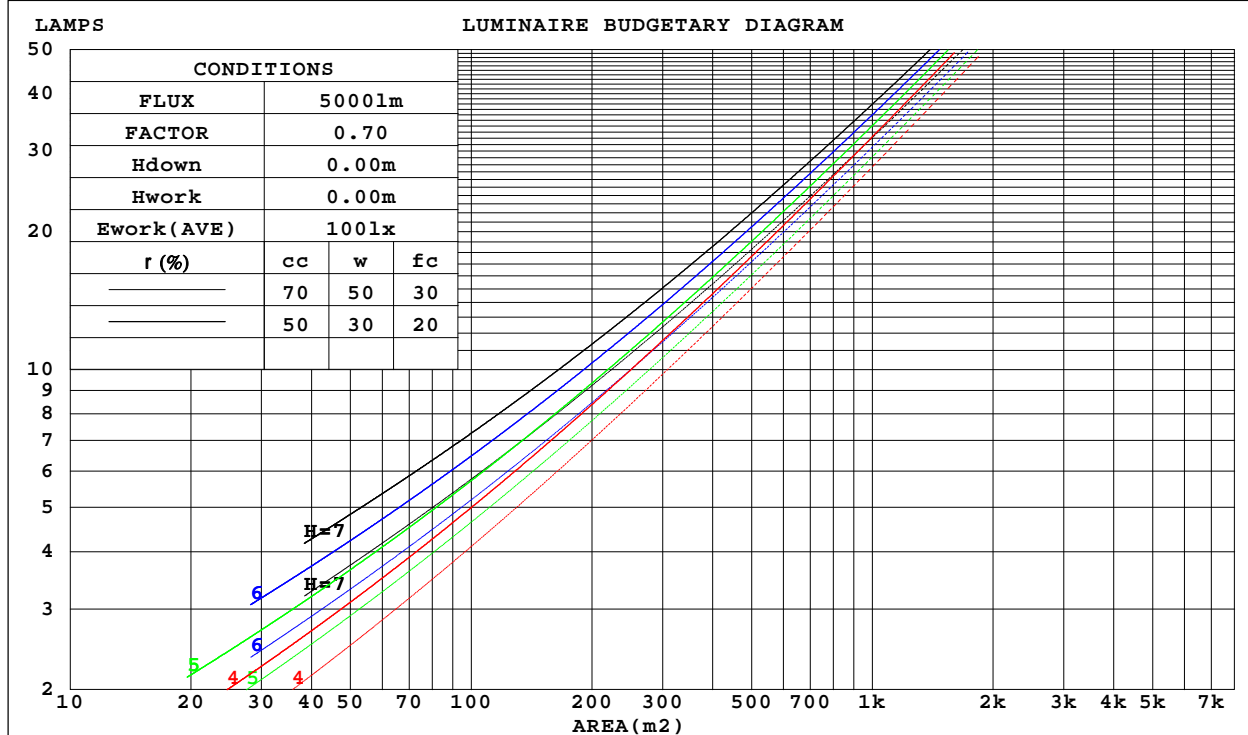

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9186]  
 Remarks:

WEC AND CCEC

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.172	.055	.287	.165	.053	.275	.159	.051	.263	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.272	.151	.047	.261	.147	.046	.251	.142	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.243	.133	.041	.234	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.029	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.186	.091	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.160	.138	.157	.137	.119	.107	.094	.082	.062	.055	.048	.020	.018	.015	
2.0	.176	.135	.102	.150	.116	.088	.103	.081	.061	.059	.047	.036	.019	.015	.012	
3.0	.168	.118	.078	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.062	.137	.090	.054	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.051	.131	.081	.044	.090	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.043	.125	.074	.037	.086	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.119	.068	.032	.083	.048	.023	.048	.028	.013	.015	.009	.004	
8.0	.132	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.029	.109	.059	.025	.075	.042	.018	.044	.025	.011	.014	.008	.004	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9186]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: 0.18*0.18			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.3	23.9	22.6	24.2	24.5	21.9	23.6	22.3	23.9	24.2
3H	24.1	25.6	24.5	25.9	26.3	23.7	25.2	24.1	25.5	25.9
4H	24.8	26.2	25.2	26.6	27.0	24.4	25.8	24.8	26.1	26.5
6H	25.4	26.6	25.8	27.0	27.4	24.9	26.1	25.3	26.5	26.9
8H	25.5	26.8	26.0	27.2	27.6	25.0	26.2	25.4	26.6	27.0
12H	25.6	26.8	26.1	27.2	27.7	25.1	26.3	25.5	26.6	27.1
4H 2H	22.9	24.3	23.3	24.7	25.0	22.5	23.9	22.9	24.3	24.7
3H	25.0	26.2	25.4	26.6	27.0	24.5	25.7	24.9	26.1	26.5
4H	25.8	26.9	26.3	27.3	27.8	25.3	26.4	25.7	26.8	27.2
6H	26.5	27.4	27.0	27.9	28.3	25.9	26.8	26.4	27.3	27.7
8H	26.7	27.6	27.2	28.0	28.5	26.1	26.9	26.5	27.4	27.9
12H	26.9	27.7	27.4	28.2	28.6	26.2	27.0	26.7	27.4	27.9
8H 4H	26.2	27.0	26.6	27.5	27.9	25.6	26.4	26.0	26.9	27.4
6H	27.0	27.7	27.5	28.2	28.7	26.3	27.0	26.8	27.5	28.0
8H	27.3	27.9	27.8	28.4	28.9	26.5	27.1	27.0	27.7	28.2
12H	27.5	28.1	28.0	28.6	29.2	26.7	27.2	27.2	27.7	28.3
12H 4H	26.2	27.0	26.7	27.4	27.9	25.6	26.4	26.1	26.9	27.3
6H	27.0	27.7	27.6	28.1	28.7	26.3	27.0	26.8	27.4	28.0
8H	27.4	28.0	27.9	28.5	29.0	26.6	27.2	27.1	27.7	28.2
CIE190: 2010										

CIE190: 2010  
Area: 0.0324 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-9

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=0.9186]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	46	39	55	45	38	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-6-9

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.600m [K=0.9186]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

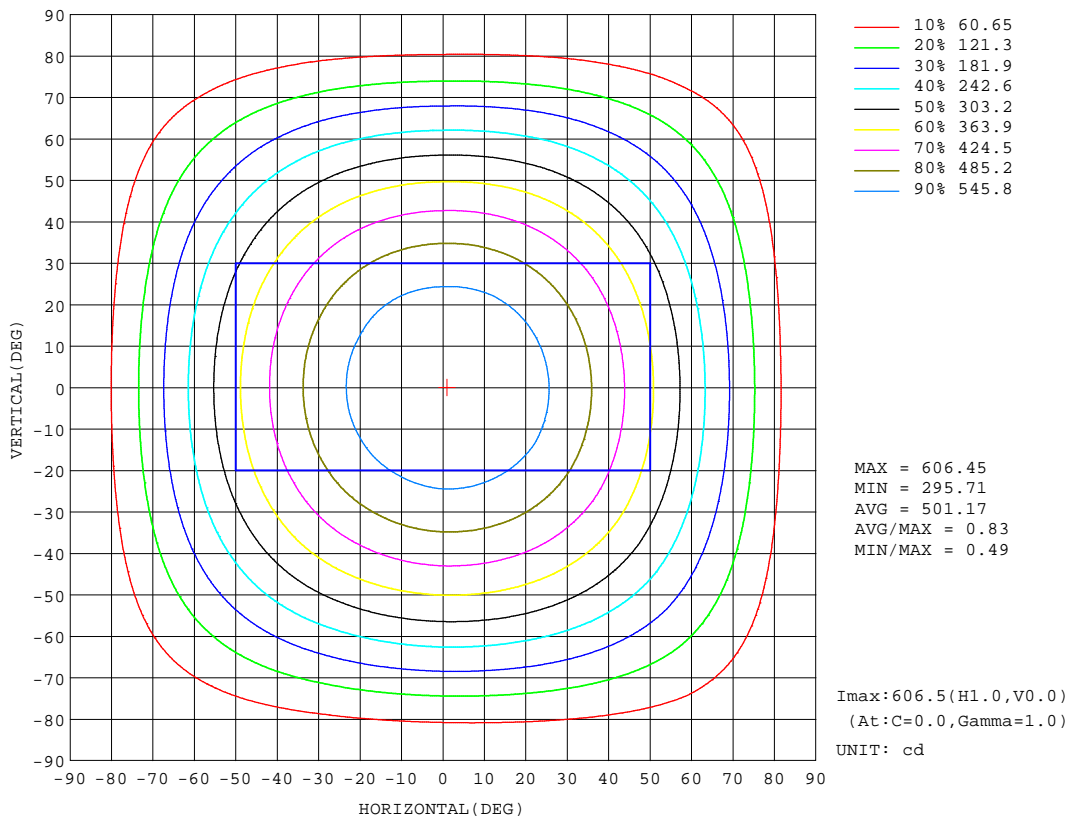

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-9


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9186]  
 Remarks:



AAI Figure

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

Flux out:1292 lm

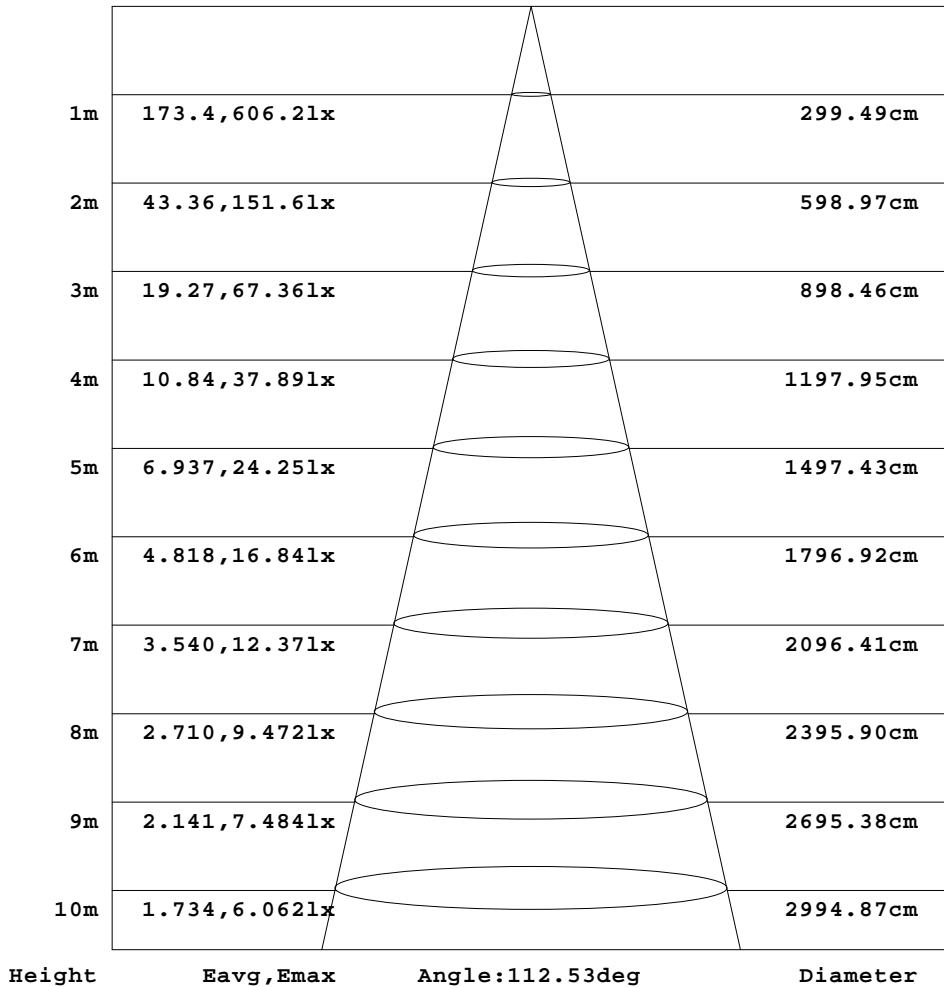


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9186]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

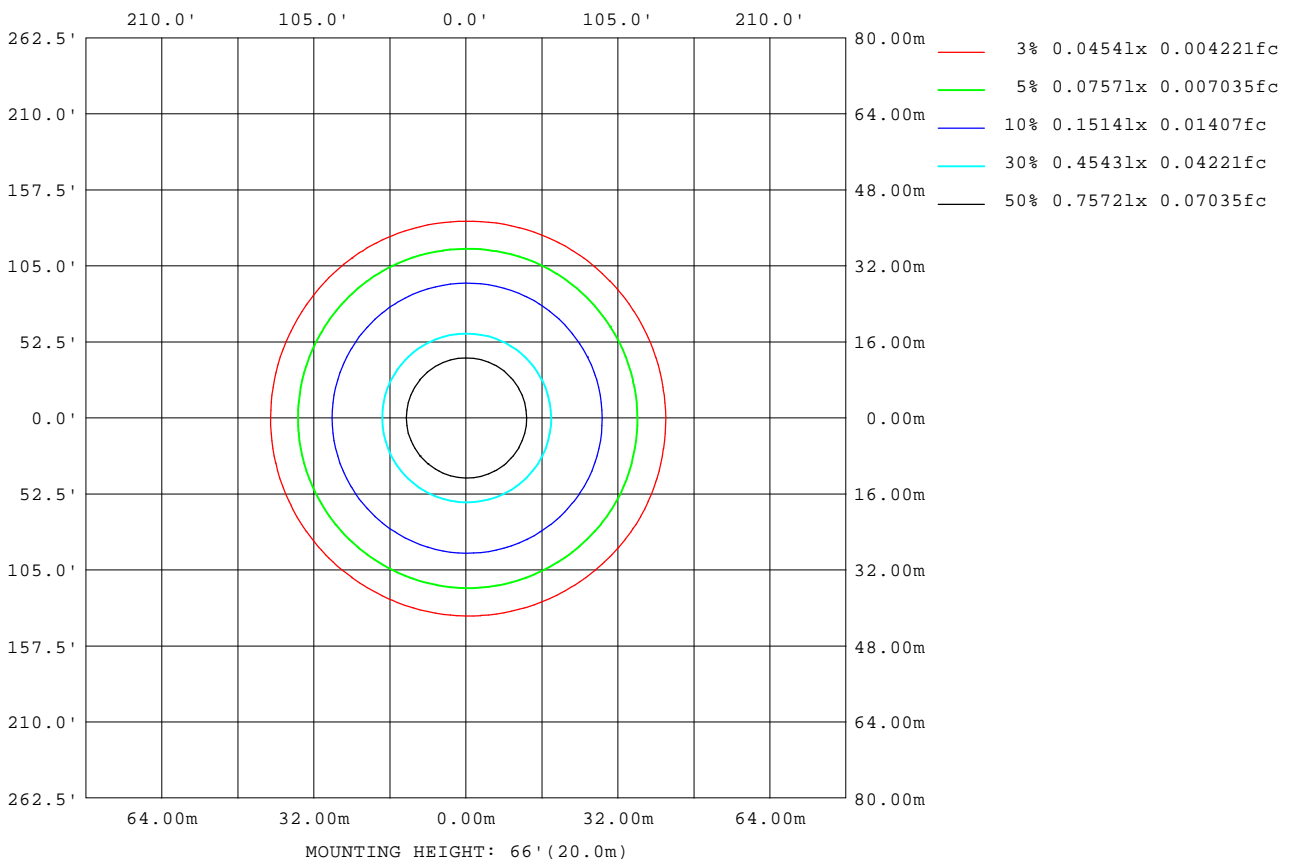

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=0.9186]  
 Remarks:

## LED Avg.L Report

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15756
L_0~180(75)av	13717
L_0~180(85)av	9998
L_90~270(65)av	15703
L_90~270(75)av	13473
L_90~270(85)av	8354
L_45(65)av	15813
L_45(75)av	13644
L_45(85)av	8998

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-9

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=0.9186]  
Remarks:

Planar Illuminance Curve

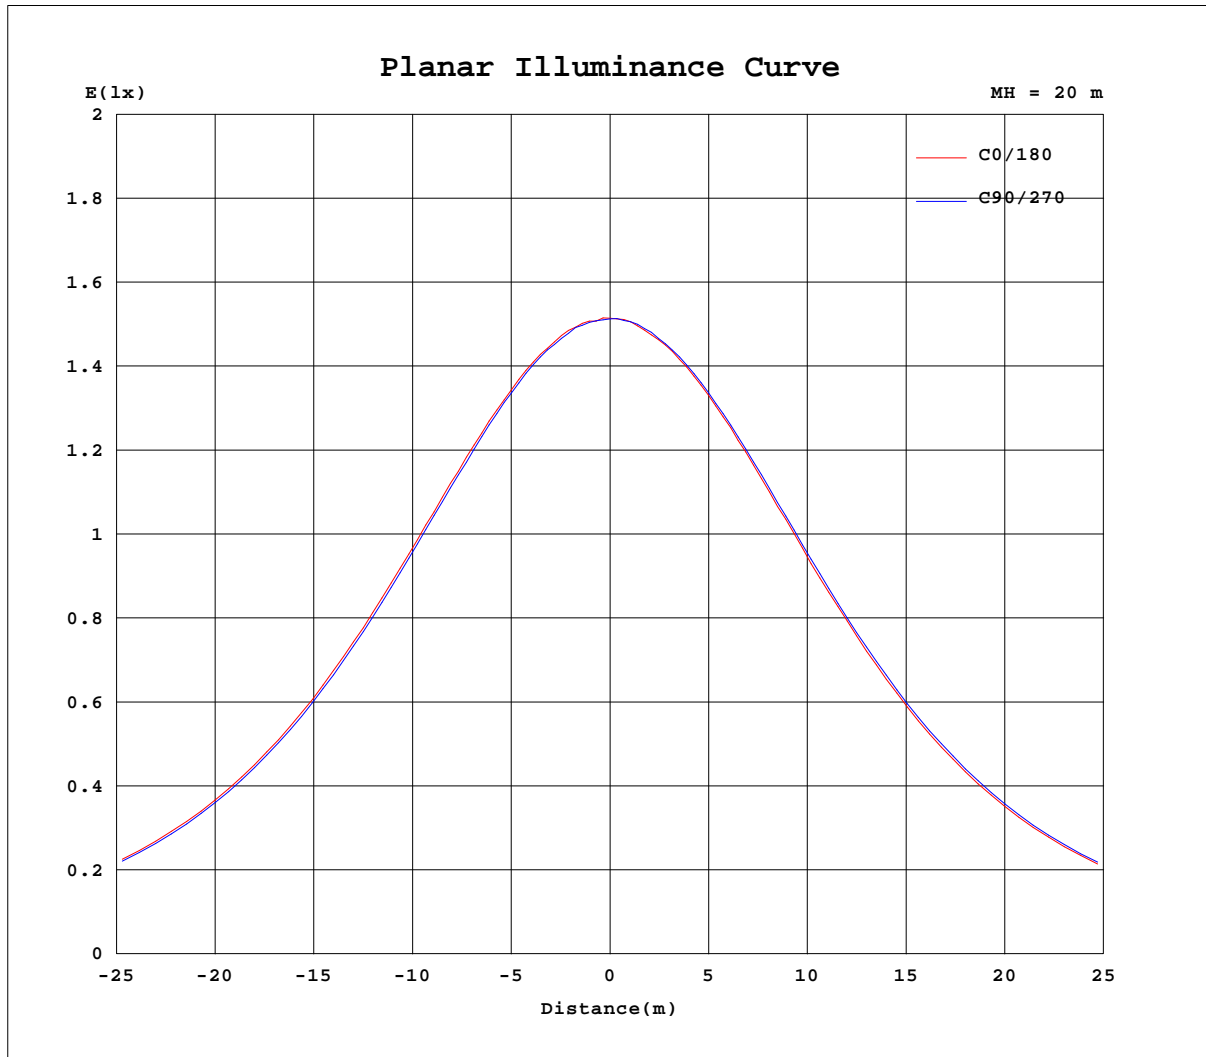

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=0.9186]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.21V I:0.1660A P:19.670W PF:0.9858 Freq:59.98Hz Lamp Flux:1743.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	606	606	606	606	606	606	606	606	606	606	606	606						
5	604	604	602	604	601	602	601	602	602	603	604	604						
10	598	598	596	596	593	593	593	594	594	596	598	598						
15	586	587	584	583	581	580	579	580	580	583	585	586						
20	571	571	567	565	563	561	562	561	564	565	568	569						
25	549	549	545	544	538	537	538	539	541	543	546	548						
30	522	523	520	516	512	509	510	510	513	515	519	521						
35	492	492	488	484	479	477	476	478	481	484	487	489						
40	454	457	453	448	442	441	439	440	444	446	451	454						
45	415	418	413	409	402	399	398	399	402	405	410	413						
50	371	375	370	365	358	355	354	355	359	361	367	370						
55	325	328	323	318	311	308	306	308	311	313	319	323						
60	276	280	274	270	262	259	258	258	262	263	270	273						
65	225	229	223	218	211	209	207	207	211	212	219	222						
70	173	177	171	166	159	157	156	156	160	161	167	170						
75	124	126	121	116	109	107	106	107	110	110	115	119						
80	76.3	78.1	73.2	67.9	62.5	60.9	61.4	59.1	63.2	63.6	67.6	68.5						
85	34.4	35.5	29.9	25.5	22.2	22.3	22.1	18.7	22.3	21.7	26.2	26.6						
90	3.63	2.21	0.22	0.19	0.21	0.24	0.28	0.31	0.29	0.27	0.25	1.27						
95	0.26	0.38	0.44	0.35	0.37	0.40	0.43	0.40	0.42	0.37	0.41	0.36						
100	0.42	0.44	0.48	0.46	0.47	0.51	0.59	0.57	0.59	0.52	0.54	0.51						
105	0.58	0.60	0.60	0.64	0.59	0.66	0.78	0.74	0.77	0.71	0.73	0.68						
110	0.77	0.77	0.77	0.80	0.79	0.84	0.98	0.93	0.96	0.91	0.91	0.87						
115	0.94	0.94	0.95	1.01	0.98	1.03	1.17	1.12	1.14	1.11	1.10	1.05						
120	1.10	1.12	1.11	1.16	1.13	1.20	1.34	1.30	1.32	1.30	1.27	1.23						
125	1.26	1.26	1.27	1.31	1.29	1.35	1.51	1.44	1.46	1.45	1.42	1.38						
130	1.40	1.41	1.40	1.47	1.44	1.48	1.66	1.59	1.59	1.58	1.57	1.54						
135	1.52	1.52	1.53	1.58	1.55	1.62	1.78	1.73	1.71	1.72	1.69	1.63						
140	1.62	1.63	1.65	1.68	1.69	1.71	1.89	1.85	1.83	1.83	1.79	1.74						
145	1.79	1.77	1.76	1.80	1.83	1.83	2.01	1.98	1.93	1.92	1.92	1.85						
150	1.90	1.91	1.87	1.95	1.95	1.96	2.10	2.09	2.01	2.03	2.02	1.96						
155	2.01	2.03	2.01	2.07	2.06	2.10	2.20	2.20	2.14	2.14	2.12	2.06						
160	2.10	2.11	2.16	2.18	2.16	2.20	2.28	2.30	2.25	2.24	2.19	2.18						
165	2.24	2.23	2.31	2.32	2.27	2.30	2.41	2.41	2.36	2.36	2.34	2.31						
170	2.34	2.35	2.38	2.43	2.37	2.45	2.45	2.51	2.44	2.47	2.44	2.39						
175	2.46	2.49	2.50	2.49	2.52	2.50	2.53	2.60	2.54	2.54	2.53	2.51						
180	2.55	2.59	2.58	2.57	2.57	2.52	2.59	2.58	2.58	2.58	2.55	2.54						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-9

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9186]  
 Remarks: