
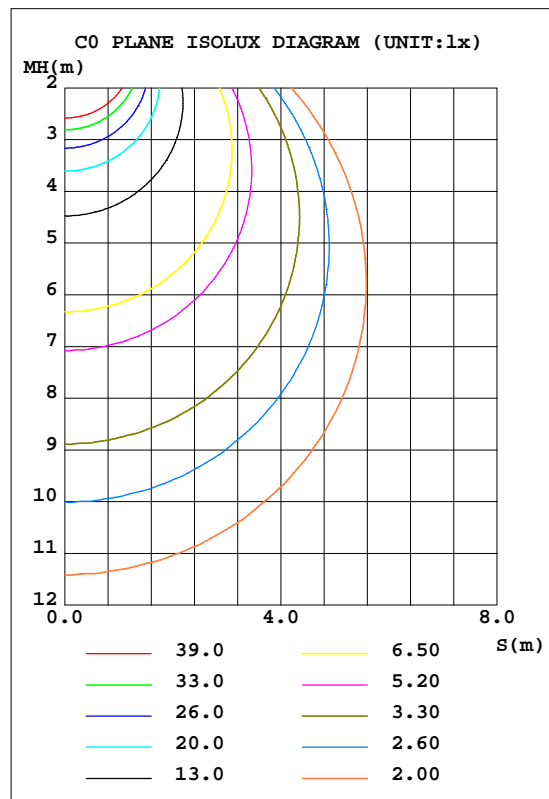


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 63.37 lm/W			
MODELASD	JBS-4D12AC(5000K)	I _{max} (cd)	261.0	S/MH(C0/180)	1.26
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	750.24	h UP, DN(C0-180)	0.2,49.3
NOMINAL FLUX(lm)	750.244	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

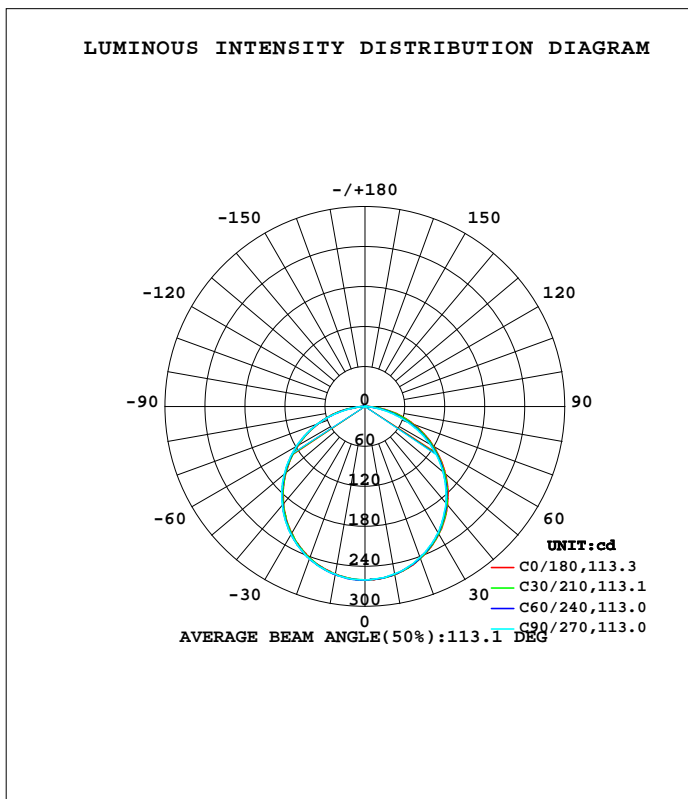

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	255.9	255.7	255.2	255.2	255.3	255.8	255.8	256.6	0- 10	24.64	24.64	3.28,3.28
20	242.7	242.4	241.3	241.0	241.8	242.7	243.4	243.9	10- 20	70.63	95.27	12.7,12.7
30	221.4	220.4	219.0	218.6	219.6	221.0	222.1	222.7	20- 30	107.2	202.4	27,27
40	192.8	190.5	189.1	188.6	190.0	191.7	192.9	193.4	30- 40	129.3	331.8	44.2,44.2
50	157.8	155.1	153.1	152.6	154.9	156.8	158.2	158.7	40- 50	134.3	466.1	62.1,62.1
60	118.3	115.2	112.6	112.3	115.2	116.9	118.6	119.3	50- 60	121.8	587.9	78.4,78.4
70	77.29	72.39	67.34	69.48	74.05	74.51	74.21	76.83	60- 70	93.86	681.7	90.9,90.9
80	36.39	28.97	23.08	25.99	33.08	30.66	28.90	32.77	70- 80	54.23	736.0	98.1,98.1
90	0.1496	0.0158	0.0125	0.0314	0	0.0094	0.0129	0.0003	80- 90	11.64	747.6	99.6,99.6
100	0.1242	0.0963	0.1182	0.1304	0.0748	0.0839	0.0373	0.0218	90-100	0.0401	747.6	99.7,99.7
110	0.3106	0.2209	0.2425	0.2672	0.3305	0.3864	0.1986	0.1523	100-110	0.2128	747.9	99.7,99.7
120	0.5099	0.3610	0.3852	0.4133	0.7773	1.217	0.4659	0.2983	110-120	0.4622	748.3	99.7,99.7
130	0.6590	0.4730	0.5347	0.5437	0.9085	0.6151	0.5904	0.4046	120-130	0.4764	748.8	99.8,99.8
140	0.6074	0.5974	0.8019	0.6928	0.4851	0.5121	0.5299	0.4347	130-140	0.4555	749.3	99.9,99.9
150	0.6605	0.6530	1.099	0.6957	0.5201	0.5601	0.8511	0.4911	140-150	0.3855	749.6	99.9,99.9
160	0.6692	0.7063	1.108	0.7490	0.6346	0.6970	0.6332	0.5665	150-160	0.3196	750.0	100,100
170	0.7002	0.7331	0.8380	0.9445	0.7319	0.6752	0.6276	0.6277	160-170	0.2135	750.2	100,100
180	0.7028	0.7344	0.6898	0.7769	0.7463	0.7188	0.7084	0.7489	170-180	0.0688	750.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

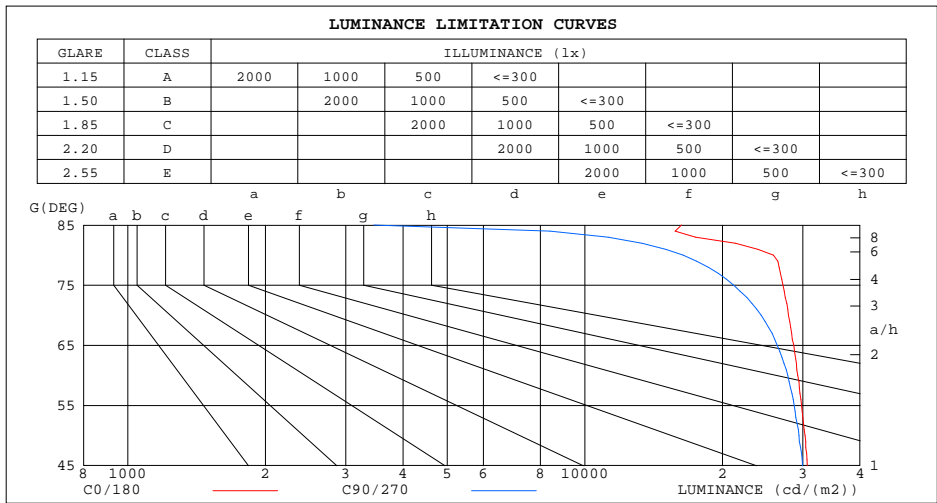

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	16283	3455
80	25871	16422
75	27146	21190
70	27896	24323
65	28653	26370
60	29211	27825
55	29825	28718
50	30313	29431
45	30700	29954


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.83
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.32	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

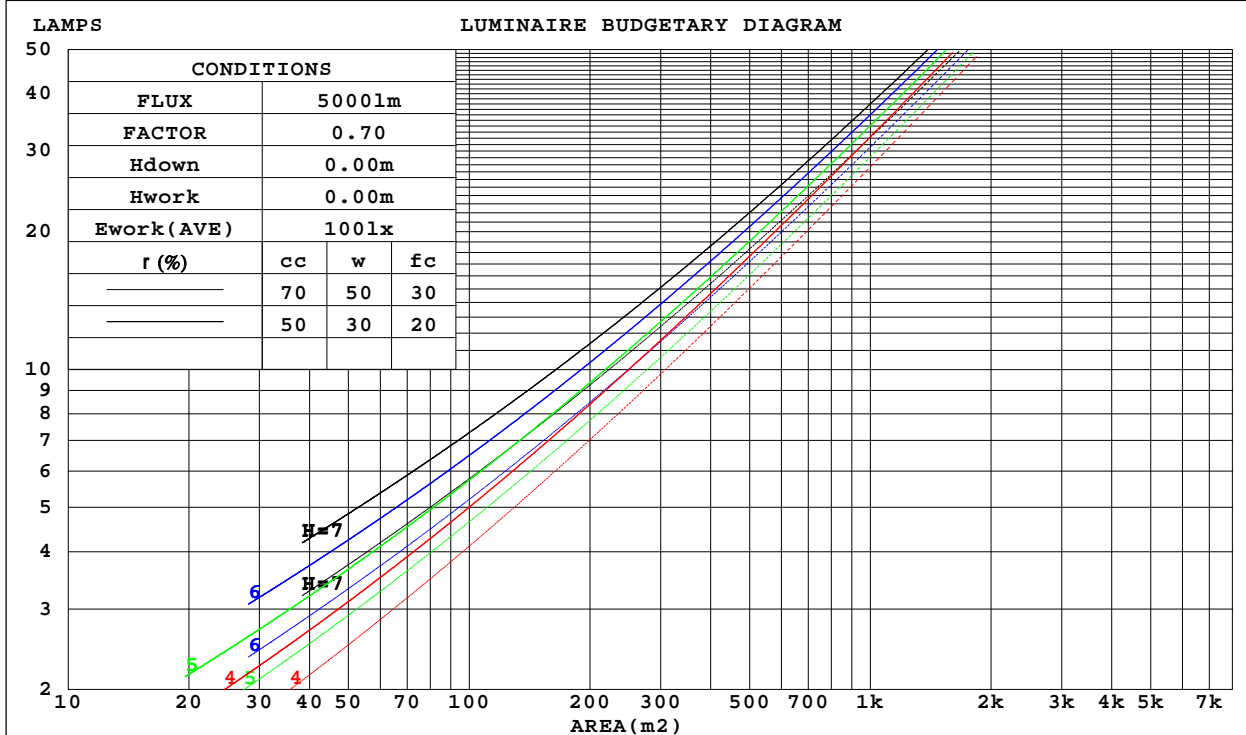

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

WEC AND CCEC

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.056	.301	.172	.055	.288	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.130	.038	.245	.128	.038	.235	.125	.037	.227	.122	.037	.218	.119	.036	
5.0	.231	.118	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.196	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.183	.159	.137	.156	.136	.118	.107	.094	.082	.062	.054	.047	.020	.017	.015	
2.0	.175	.135	.101	.150	.116	.087	.103	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.167	.117	.077	.143	.101	.067	.098	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.061	.137	.090	.053	.094	.062	.037	.055	.037	.022	.018	.012	.007	
5.0	.152	.093	.050	.131	.081	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.125	.074	.036	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.113	.063	.027	.079	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.126	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.039	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.09*0.09			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.6	24.3	25.9	26.3	23.7	25.3	24.1	25.6	26.0
3H	25.9	27.4	26.3	27.7	28.1	25.4	26.9	25.8	27.2	27.6
4H	26.7	28.1	27.1	28.5	28.8	26.0	27.4	26.4	27.7	28.1
6H	27.3	28.6	27.7	29.0	29.4	26.3	27.6	26.8	28.0	28.4
8H	27.5	28.7	27.9	29.1	29.5	26.4	27.6	26.8	28.0	28.5
12H	27.6	28.7	28.0	29.1	29.6	26.4	27.6	26.9	28.0	28.4
4H 2H	24.6	26.0	25.0	26.4	26.7	24.3	25.7	24.7	26.1	26.5
3H	26.8	27.9	27.2	28.3	28.8	26.3	27.4	26.7	27.8	28.2
4H	27.7	28.7	28.1	29.2	29.6	27.0	28.0	27.4	28.4	28.9
6H	28.4	29.4	28.9	29.8	30.3	27.4	28.3	27.9	28.8	29.2
8H	28.7	29.5	29.1	30.0	30.4	27.5	28.4	28.0	28.8	29.3
12H	28.8	29.5	29.2	30.0	30.5	27.5	28.3	28.0	28.8	29.2
8H 4H	28.0	28.8	28.4	29.3	29.8	27.3	28.1	27.7	28.6	29.0
6H	28.8	29.6	29.3	30.1	30.5	27.8	28.5	28.3	29.0	29.5
8H	29.1	29.8	29.6	30.3	30.8	27.9	28.6	28.4	29.1	29.6
12H	29.3	29.9	29.8	30.4	30.9	27.9	28.5	28.4	29.0	29.6
12H 4H	28.0	28.8	28.5	29.2	29.7	27.3	28.1	27.8	28.6	29.0
6H	28.9	29.5	29.4	30.0	30.5	27.8	28.5	28.4	29.0	29.5
8H	29.2	29.8	29.7	30.3	30.8	28.0	28.6	28.5	29.1	29.6
CIE190: 2010										

CIE190: 2010
Area: 0.0081 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.0930]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	75	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	57
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	101	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.0930]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

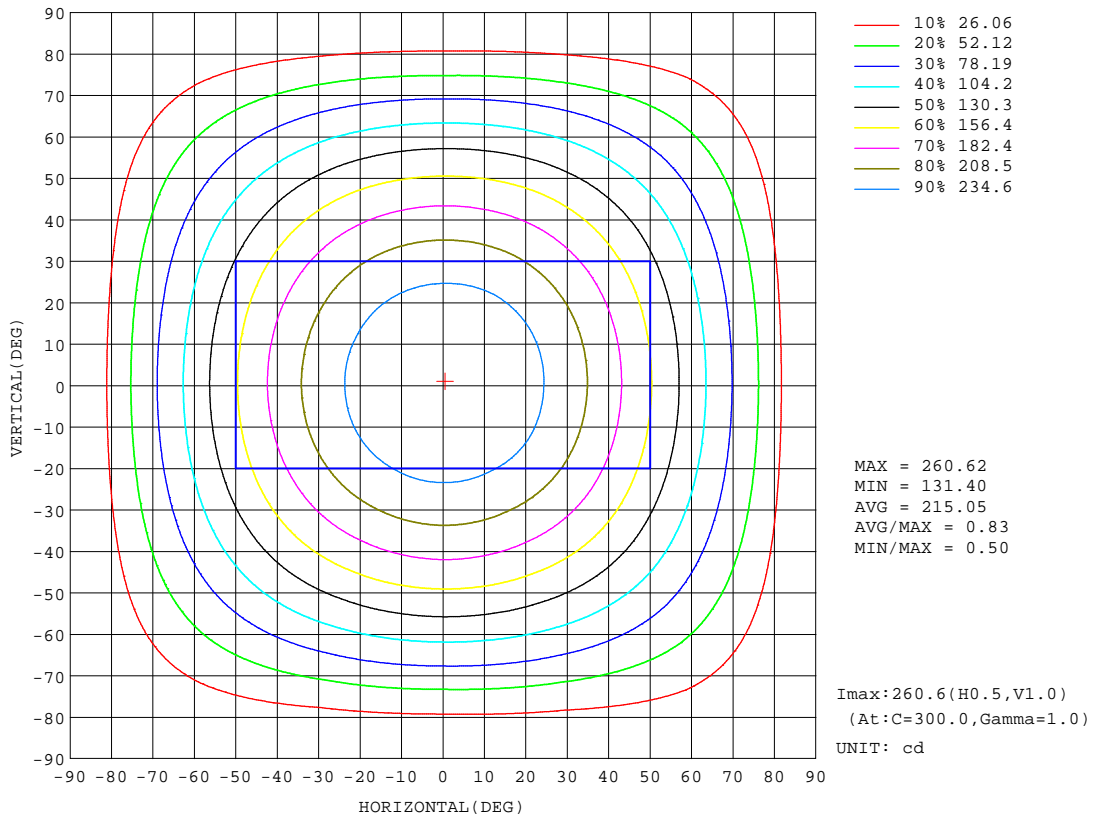


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

AAI Figure

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

Flux out:553.6 lm

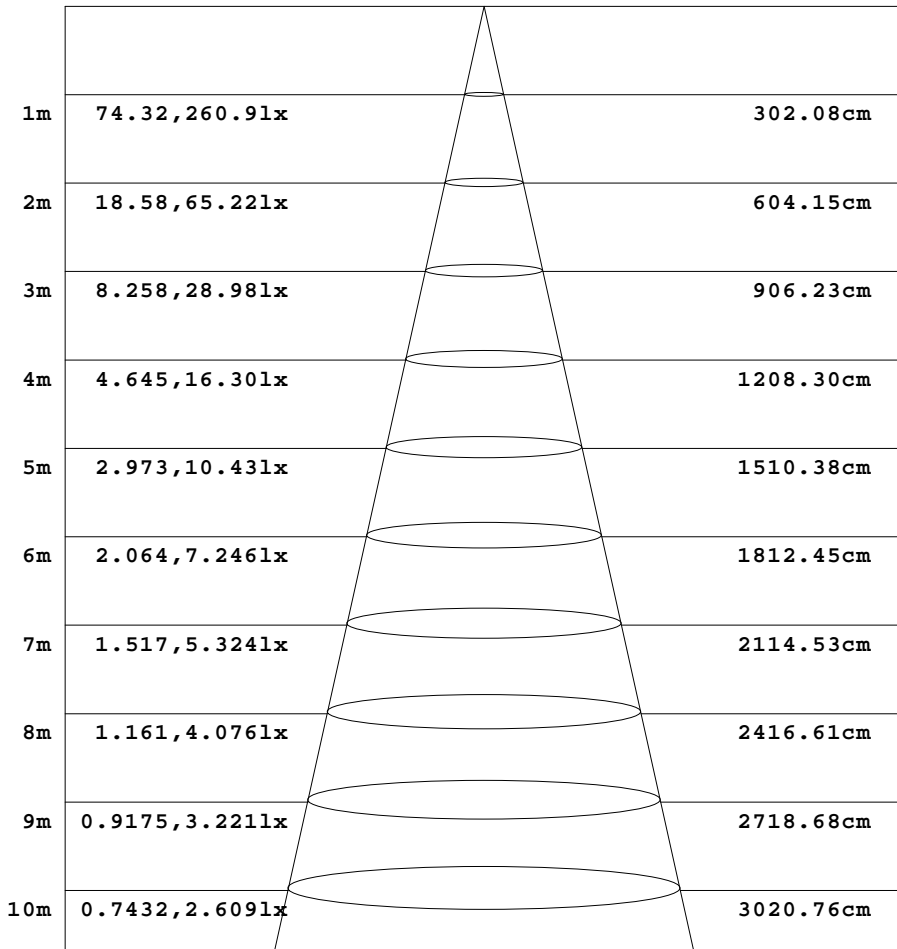

Height Eavg, Emax Angle:112.98deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

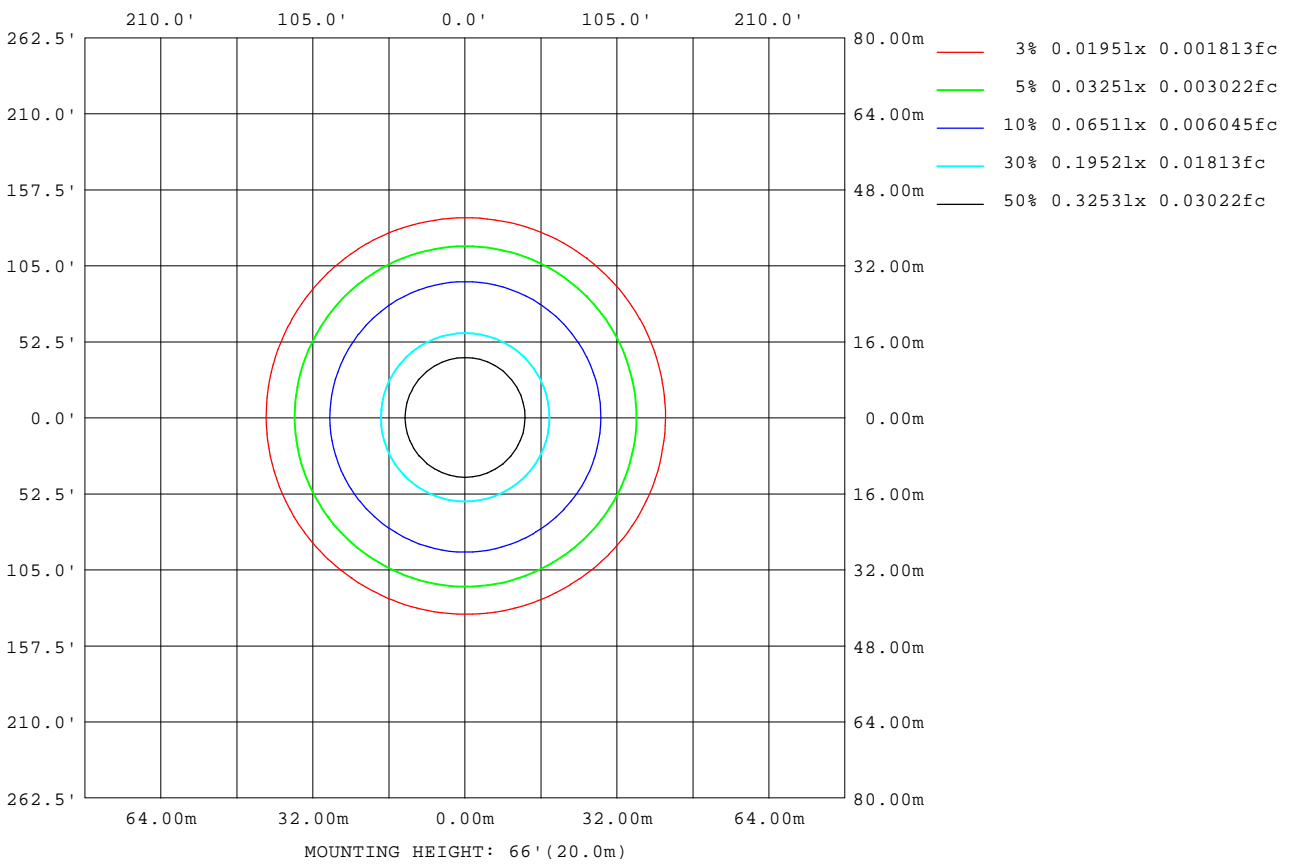

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0930]
 Remarks:

LED Avg.L Report

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	28174
L_0~180(75)av	26330
L_0~180(85)av	14686
L_90~270(65)av	27332
L_90~270(75)av	22737
L_90~270(85)av	7967
L_45(65)av	27743
L_45(75)av	24453
L_45(85)av	12610

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.0930]
Remarks:

Planar Illuminance Curve

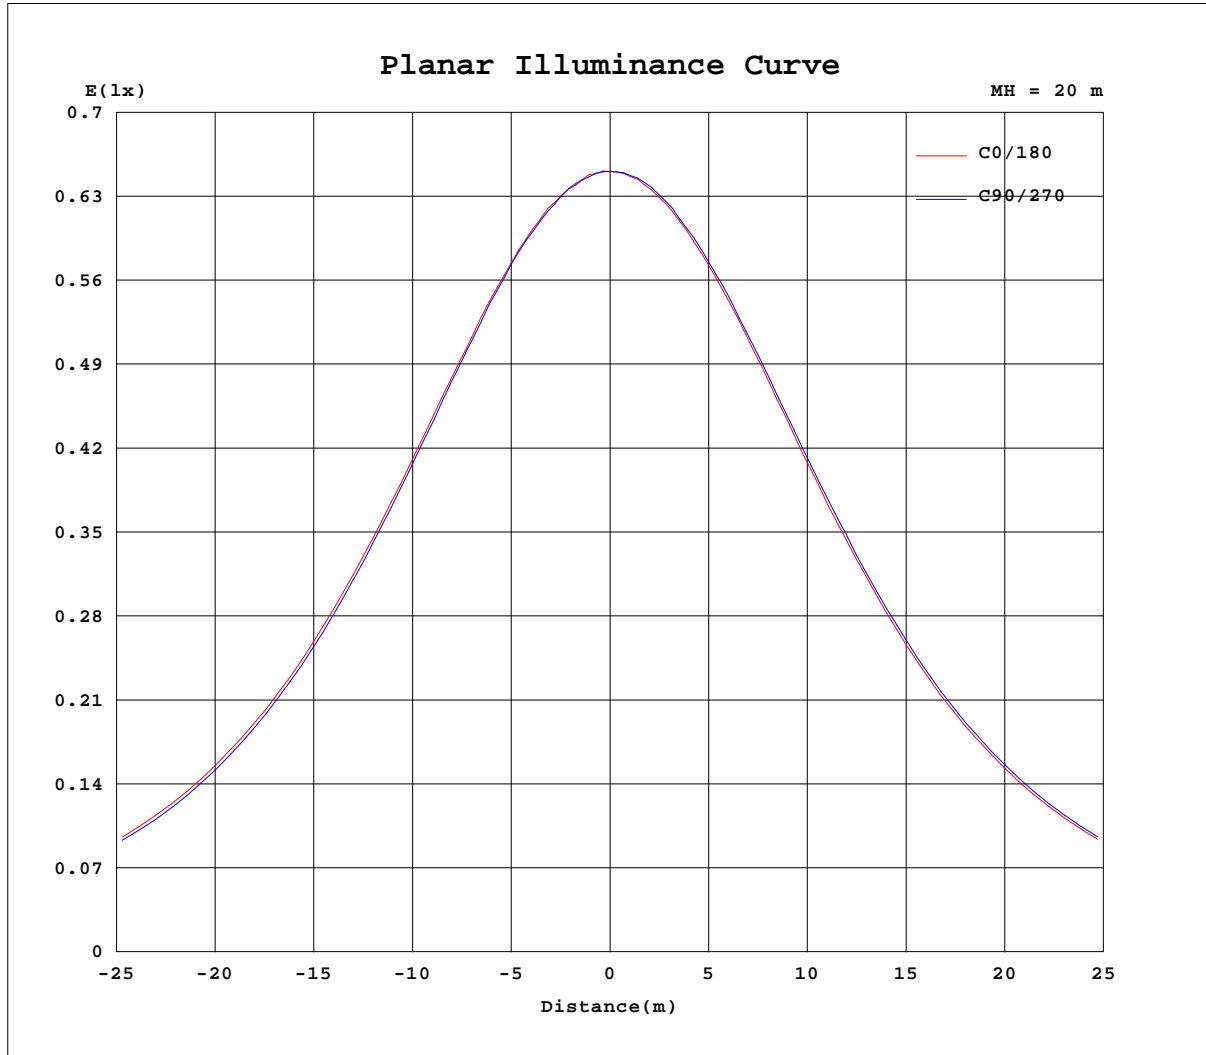

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0930]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.1004A P:11.840W PF:0.9780 Freq:59.98Hz Lamp Flux:750.244x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	260	260	260	260	260	260	260	260	260	260	260	260						
5	259	259	259	259	259	259	259	259	260	259	260	259						
10	256	256	255	255	256	255	255	256	256	256	257	256						
15	251	250	250	249	249	250	250	250	251	251	252	251						
20	243	243	242	241	241	241	242	242	243	243	244	243						
25	233	232	232	231	231	231	232	233	233	234	235	234						
30	221	221	220	219	219	219	220	221	221	222	223	222						
35	208	207	205	205	204	205	206	207	208	209	210	209						
40	193	192	190	189	188	189	190	191	193	193	194	193						
45	176	175	172	171	171	171	173	174	176	177	177	176						
50	158	156	154	153	152	153	155	156	158	158	159	158						
55	139	137	134	133	132	133	136	136	138	139	140	139						
60	118	117	114	113	112	113	115	116	118	119	120	119						
65	98.1	96.0	92.3	90.2	90.2	92.4	94.8	95.4	96.7	96.9	98.3	98.5						
70	77.3	74.9	69.9	67.3	67.7	71.2	74.1	74.3	74.7	74.2	76.3	77.4						
75	56.9	53.7	47.1	44.4	44.9	50.0	53.5	52.9	52.1	50.9	53.4	56.1						
80	36.4	32.5	25.5	23.1	23.3	28.6	33.1	31.7	29.6	28.9	30.9	34.6						
85	11.5	11.5	5.49	2.44	3.51	8.43	9.24	10.3	9.20	8.81	9.72	12.2						
90	0.15	0.02	0.01	0.01	0.04	0.02	0.00	0.02	0.00	0.01	0.00	0.00						
95	0.04	0.07	0.01	0.07	0.04	0.07	0.05	0.00	0.01	0.00	0.00	0.00						
100	0.12	0.14	0.05	0.12	0.12	0.14	0.07	0.11	0.06	0.04	0.03	0.01						
105	0.22	0.21	0.11	0.19	0.19	0.20	0.21	0.76	0.20	0.11	0.09	0.11						
110	0.31	0.27	0.17	0.24	0.26	0.28	0.33	0.45	0.33	0.20	0.17	0.14						
115	0.42	0.36	0.24	0.32	0.33	0.35	0.62	0.50	2.25	0.30	0.24	0.17						
120	0.51	0.42	0.30	0.39	0.40	0.42	0.78	0.58	1.86	0.47	0.31	0.29						
125	0.60	0.49	0.37	0.43	0.45	0.56	0.80	0.68	0.72	0.52	0.36	0.36						
130	0.66	0.54	0.40	0.53	0.55	0.53	0.91	0.75	0.48	0.59	0.41	0.40						
135	0.70	0.58	0.49	0.66	0.70	0.58	1.12	0.49	0.66	0.60	0.46	0.39						
140	0.61	0.62	0.57	0.80	0.77	0.61	0.49	0.53	0.50	0.53	0.47	0.40						
145	0.61	0.65	0.61	0.98	0.69	0.66	0.51	0.54	0.53	0.54	0.51	0.41						
150	0.66	0.69	0.62	1.10	0.70	0.69	0.52	0.54	0.58	0.85	0.55	0.43						
155	0.66	0.71	0.64	0.85	0.72	0.72	0.57	0.57	0.99	0.90	0.90	0.50						
160	0.67	0.75	0.67	1.11	0.74	0.76	0.63	0.60	0.79	0.63	0.62	0.52						
165	0.68	1.14	0.67	1.23	0.76	1.43	0.70	0.64	0.69	0.63	0.65	0.53						
170	0.70	0.77	0.69	0.84	0.77	1.12	0.73	0.69	0.66	0.63	0.67	0.58						
175	0.71	0.78	0.70	0.69	0.78	0.78	0.74	0.72	0.67	0.65	0.70	0.63						
180	0.70	0.78	0.69	0.69	0.79	0.76	0.75	0.74	0.70	0.71	0.74	0.76						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks: