
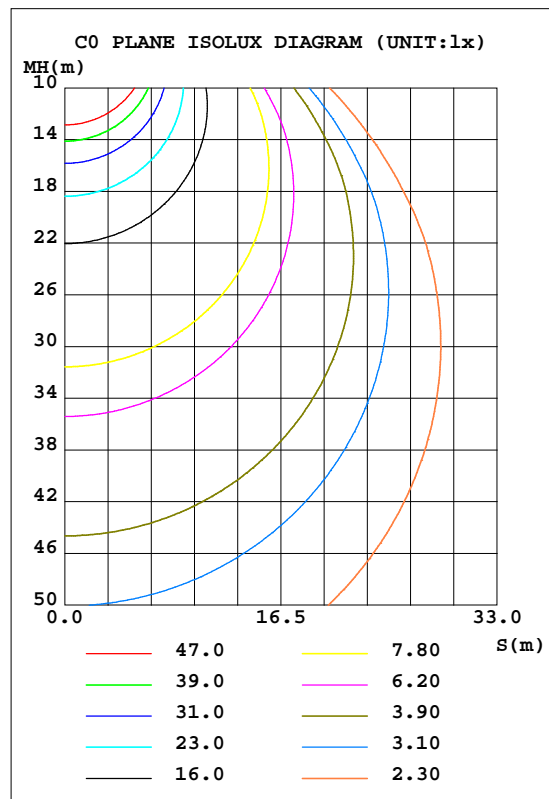


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 153.00 lm/W			
MODEL	ASD-UHB2HV-FS-150D50	I _{max} (cd)	7776	S/MH(C0/180)	1.31
NOMINAL POWER(W)	150	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	277	TOTAL FLUX(lm)	21900	h UP, DN(C0-180)	0.7,48.6
NOMINAL FLUX(lm)	21900	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.5,50.1
LAMPS INSIDE	1	h up(%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	277	h down(%)	98.7	CIBSE SHR MAX	1.35

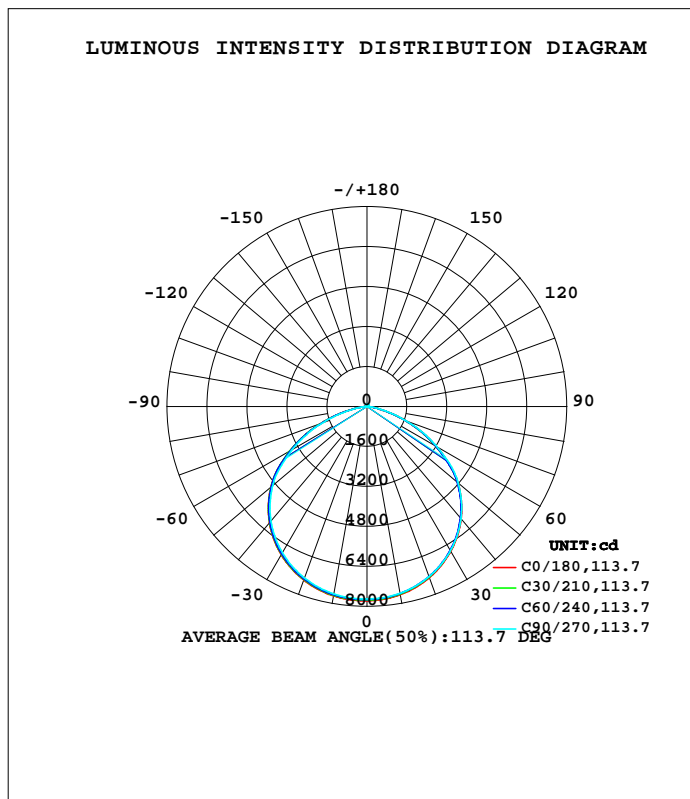

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	7652	7611	7591	7586	7699	7663	7620	7572	0- 10	732.1	732.1	3.33,3.33
20	7297	7255	7249	7272	7396	7361	7308	7236	10- 20	2114	2846	12.9,12.9
30	6703	6665	6675	6726	6858	6831	6767	6670	20- 30	3247	6092	27.7,27.7
40	5868	5830	5857	5936	6075	6056	5982	5860	30- 40	3980	10072	45.8,45.8
50	4756	4727	4769	4876	5023	5010	4924	4781	40- 50	4182	14254	64.8,64.8
60	3226	3179	3251	3410	3553	3561	3461	3301	50- 60	3703	17956	81.7,81.7
70	1602	1596	1651	1807	1916	1913	1837	1664	60- 70	2539	20496	93.2,93.2
80	306.7	302.0	348.8	429.0	486.7	483.9	424.5	344.1	70- 80	1071	21567	98.1,98.1
90	11.93	11.89	11.32	10.81	15.57	19.32	10.11	10.22	80- 90	140.4	21707	98.7,98.7
100	23.32	23.34	22.64	21.23	15.58	15.44	15.84	16.50	90-100	16.05	21723	98.8,98.8
110	36.13	36.22	35.46	33.96	23.47	23.12	23.64	24.41	100-110	25.63	21749	98.9,98.9
120	48.47	48.57	47.90	46.38	32.57	32.10	32.67	33.53	110-120	34.53	21783	99.1,99.1
130	61.25	61.32	60.65	58.95	42.80	42.34	42.94	43.86	120-130	41.10	21824	99.3,99.3
140	73.68	73.68	72.96	71.48	54.65	54.11	54.57	55.48	130-140	44.64	21869	99.5,99.5
150	83.96	83.87	83.23	82.03	66.24	65.71	66.03	66.73	140-150	43.41	21912	99.7,99.7
160	91.21	91.04	90.60	89.70	77.24	76.70	76.86	77.29	150-160	36.68	21949	99.8,99.8
170	95.69	95.44	95.16	94.59	94.39	93.62	93.47	93.75	160-170	25.19	21974	100,100
180	96.69	96.42	96.24	96.02	97.19	96.36	96.03	96.00	170-180	9.118	21983	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 12175 lm

%lum = 55.4%

%lamp = 55.4%

Conical surface Flux(120deg): 17956 lm

%lum = 81.7%


%lamp = 81.7%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

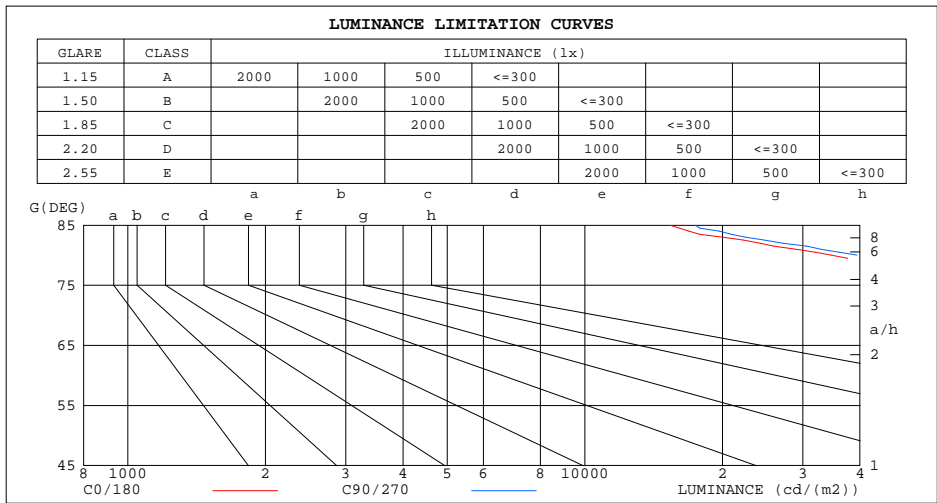

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	15392	17463
80	34631	39385
75	64610	68933
70	91868	94646
65	112912	114351
60	126524	127485
55	137311	139271
50	145075	145470
45	148306	148247


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.05	1.01	.97	1.02	.99	.96	.98	.95	.92	.94	.92	.89	.90	.88	.86	.84
2.0	.92	.85	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.79	.76	.73	.71
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.73	.68	.63	.70	.66	.62	.60
4.0	.72	.63	.56	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.53	.51
5.0	.64	.55	.49	.63	.54	.48	.61	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.58	.49	.42	.57	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.50	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.33	.43	.37	.32	.30
9.0	.44	.35	.30	.43	.35	.30	.42	.35	.30	.41	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.37	.31	.27	.37	.31	.26	.25

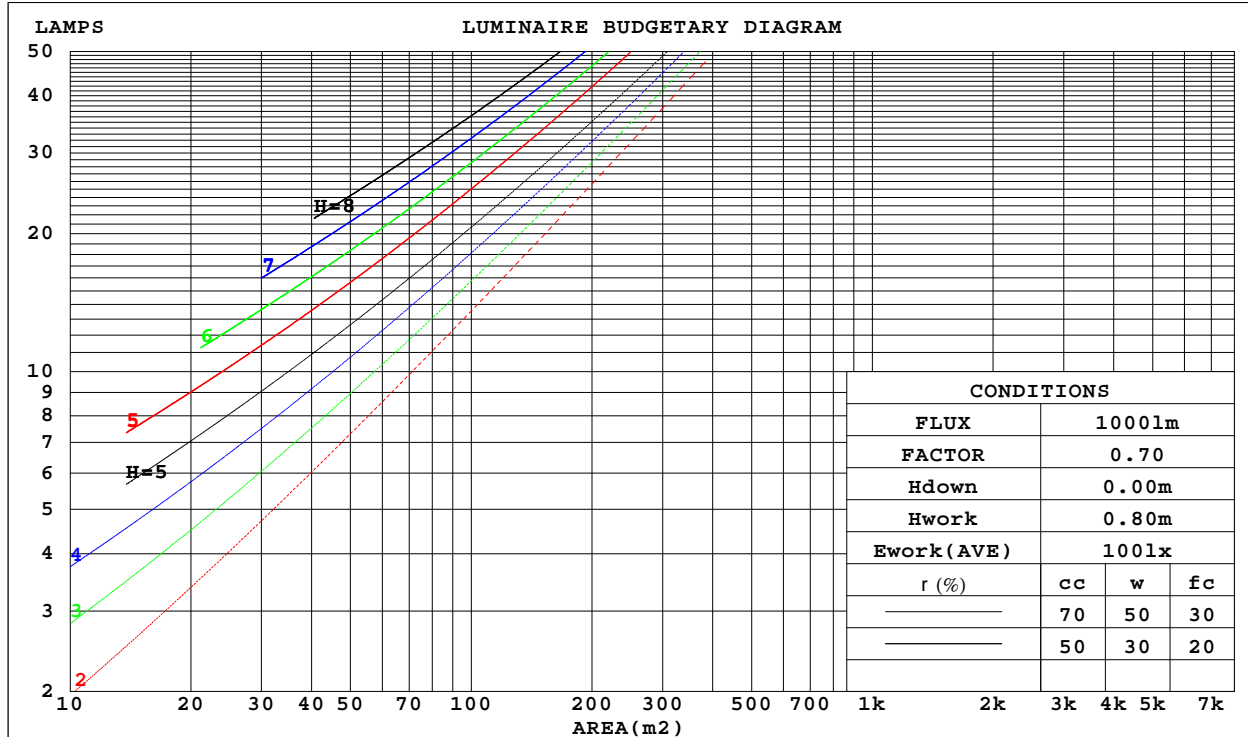

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

WEC AND CCEC

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.286	.162	.051	.278	.159	.050	.264	.152	.048	.252	.145	.047	.240	.139	.045	
2.0	.276	.151	.046	.269	.148	.046	.257	.143	.044	.246	.138	.043	.235	.133	.042	
3.0	.259	.138	.041	.253	.136	.041	.242	.131	.040	.232	.127	.039	.223	.123	.038	
4.0	.241	.125	.037	.236	.124	.037	.226	.120	.036	.218	.117	.035	.209	.114	.035	
5.0	.224	.114	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.196	.105	.031	
6.0	.209	.105	.030	.205	.104	.030	.197	.101	.029	.190	.099	.029	.184	.097	.029	
7.0	.195	.097	.027	.192	.096	.027	.185	.093	.027	.178	.091	.027	.172	.090	.026	
8.0	.183	.089	.025	.180	.088	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.188	.166	.146	.161	.142	.126	.110	.098	.087	.063	.057	.051	.020	.018	.016	
2.0	.180	.142	.110	.154	.122	.095	.106	.084	.066	.061	.049	.039	.020	.016	.013	
3.0	.172	.124	.086	.148	.107	.074	.101	.074	.052	.059	.043	.031	.019	.014	.010	
4.0	.165	.111	.069	.141	.096	.060	.097	.067	.042	.056	.039	.025	.018	.013	.008	
5.0	.158	.100	.058	.135	.087	.050	.093	.061	.036	.054	.036	.021	.017	.012	.007	
6.0	.151	.092	.050	.129	.080	.043	.089	.056	.031	.052	.033	.018	.017	.011	.006	
7.0	.144	.085	.044	.124	.074	.038	.086	.052	.027	.050	.030	.016	.016	.010	.005	
8.0	.138	.079	.039	.119	.069	.034	.082	.048	.024	.048	.028	.014	.015	.009	.005	
9.0	.132	.074	.035	.114	.064	.031	.079	.045	.022	.046	.027	.013	.015	.009	.004	
10.0	.126	.070	.033	.109	.061	.028	.076	.043	.020	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm										
NAME:					TYPE: 120°			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.: 1		
MFR.: ASD Lighting corp.					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.1	20.5	19.4	20.8	21.0	19.1	20.6	19.4	20.8	21.0
3H	20.1	21.5	20.4	21.7	22.0	20.2	21.5	20.5	21.8	22.0
4H	20.4	21.6	20.7	21.9	22.2	20.4	21.7	20.8	22.0	22.3
6H	20.4	21.6	20.7	21.9	22.2	20.5	21.7	20.8	22.0	22.3
8H	20.4	21.5	20.7	21.8	22.1	20.5	21.6	20.8	21.9	22.2
12H	20.3	21.4	20.7	21.7	22.1	20.4	21.5	20.8	21.8	22.2
4H 2H	19.5	20.8	19.9	21.1	21.4	19.6	20.8	19.9	21.1	21.4
3H	20.7	21.8	21.1	22.1	22.5	20.8	21.9	21.1	22.2	22.5
4H	21.0	22.0	21.4	22.4	22.7	21.1	22.1	21.5	22.4	22.8
6H	21.1	22.0	21.5	22.4	22.8	21.2	22.1	21.6	22.5	22.8
8H	21.1	21.9	21.5	22.3	22.7	21.2	22.0	21.6	22.4	22.8
12H	21.1	21.8	21.5	22.2	22.7	21.1	21.9	21.6	22.3	22.7
8H 4H	21.1	21.9	21.5	22.3	22.7	21.1	22.0	21.6	22.4	22.8
6H	21.2	21.9	21.7	22.3	22.8	21.3	22.0	21.7	22.4	22.8
8H	21.2	21.8	21.7	22.3	22.7	21.3	21.9	21.8	22.3	22.8
12H	21.2	21.7	21.7	22.2	22.7	21.3	21.8	21.8	22.3	22.8
12H 4H	21.1	21.8	21.5	22.2	22.7	21.1	21.9	21.6	22.3	22.7
6H	21.2	21.8	21.7	22.2	22.7	21.3	21.9	21.7	22.3	22.8
8H	21.2	21.7	21.7	22.2	22.7	21.3	21.8	21.8	22.3	22.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				
1.5H	+ 0.2 / - 0.5					+ 0.2 / - 0.5				
2.0H	+ 0.5 / - 0.4					+ 0.5 / - 0.4				

CIE Pub.117, 21983 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 10.7)
 Area: 0.051 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	58	46	39	57	46	39	56	46	39	33
0.80	68	57	50	67	56	49	65	55	49	42
1.00	77	66	59	76	65	59	73	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	87	79	72	84	77	71	64
2.00	96	88	82	94	87	81	91	84	79	71
2.50	100	92	87	98	91	86	94	88	84	75
3.00	103	97	91	101	95	90	97	92	88	79
4.00	107	102	97	104	100	96	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

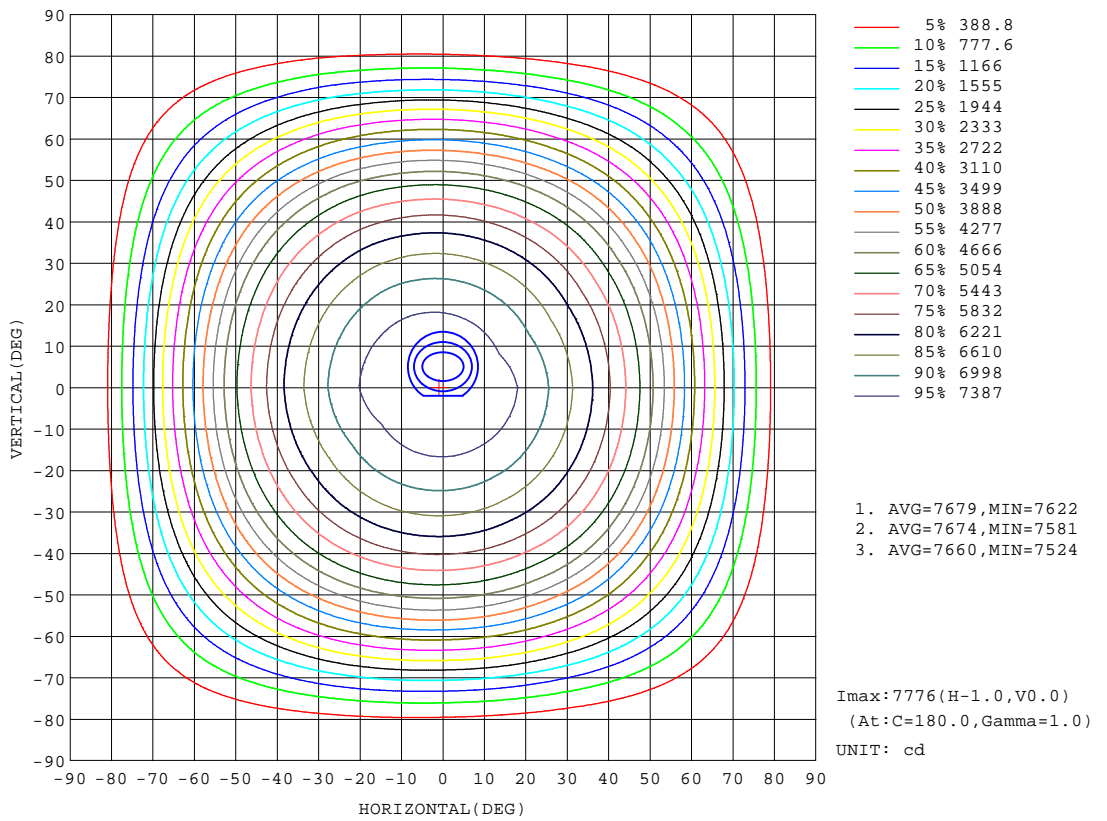


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

AAI Figure

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

Flux out:16947 lm

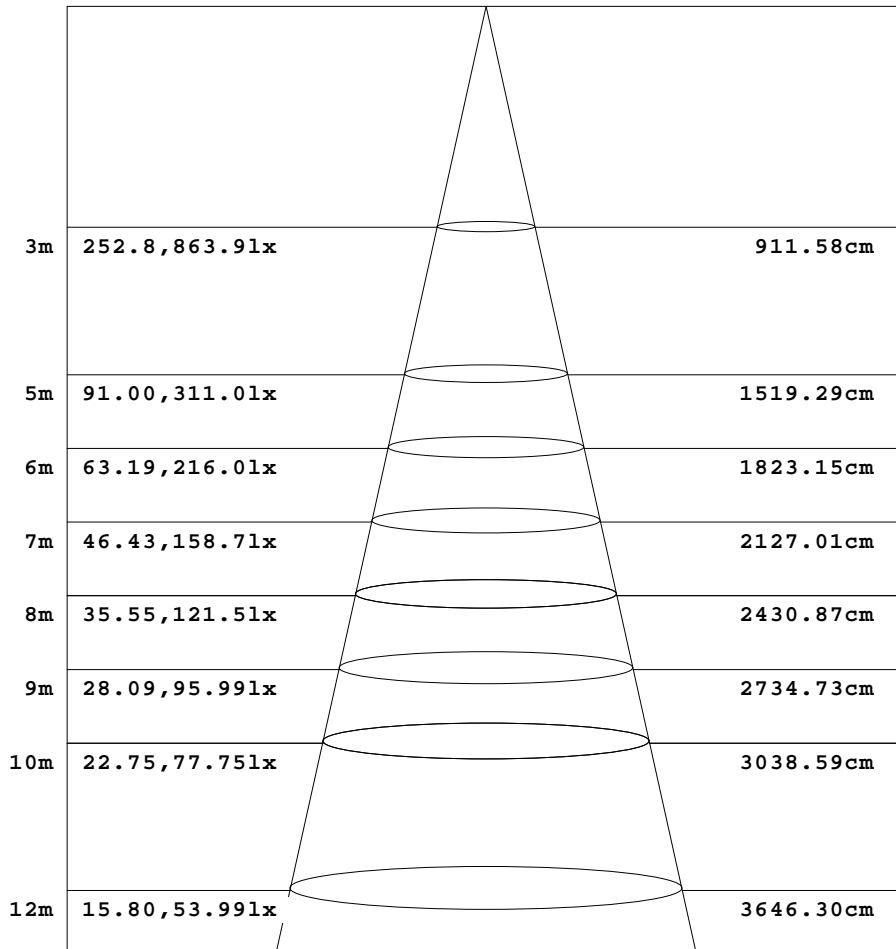

Height Eavg, Emax Angle:113.29deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

ISOLUX DIAGRAM

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

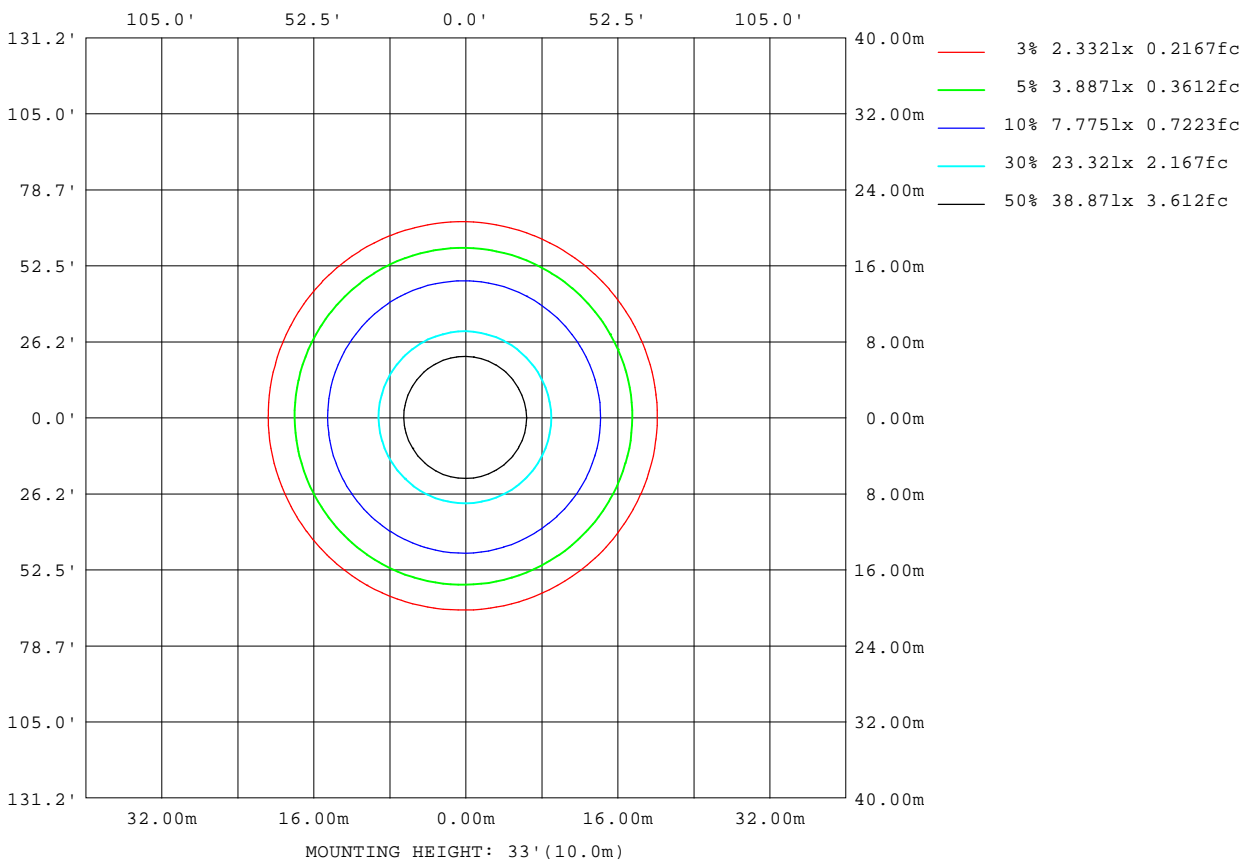

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

LED Avg.L Report

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	120539
L_0~180(75)av	75452
L_0~180(85)av	20806
L_90~270(65)av	119088
L_90~270(75)av	74461
L_90~270(85)av	20184
L_45(65)av	119366
L_45(75)av	74656
L_45(85)av	20630

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

Planar Illuminance Curve

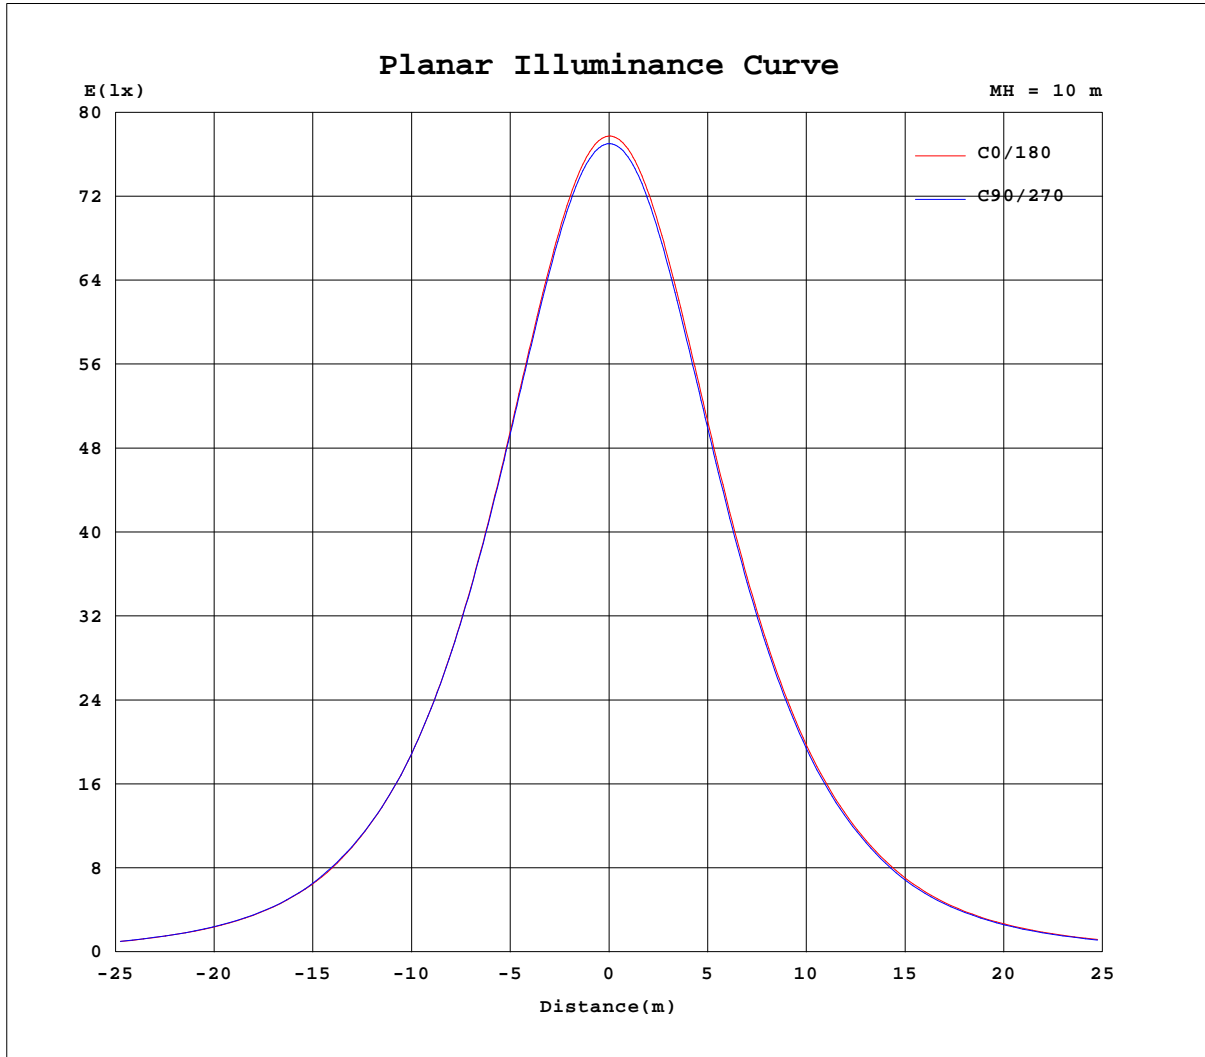

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Richard
 Test Date: 2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity: 65.0%
 Test Distance: 8.930m [K=1.0414]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:275.84V I:0.5220A P:143.68W PF:0.9980 Freq:49.99Hz Lamp Flux:21900x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	7775	7747	7722	7703	7685	7668	7775	7747	7722	7703	7685	7668						
5	7742	7713	7689	7675	7664	7654	7763	7736	7713	7687	7662	7639						
10	7652	7623	7599	7591	7588	7585	7699	7675	7652	7620	7588	7556						
15	7503	7473	7449	7448	7453	7459	7575	7551	7528	7492	7450	7413						
20	7297	7267	7243	7249	7264	7279	7396	7373	7350	7308	7259	7213						
25	7030	7001	6979	6992	7017	7041	7157	7137	7115	7067	7010	6956						
30	6703	6675	6655	6675	6710	6742	6858	6840	6821	6767	6700	6640						
35	6316	6289	6269	6298	6340	6383	6499	6483	6464	6406	6330	6262						
40	5868	5839	5821	5857	5910	5962	6075	6063	6048	5982	5897	5822						
45	5348	5319	5304	5346	5414	5472	5584	5576	5561	5488	5398	5313						
50	4756	4737	4717	4769	4841	4912	5023	5017	5002	4924	4826	4737						
55	4017	3988	3970	4074	4168	4249	4352	4361	4349	4241	4133	4031						
60	3226	3171	3186	3251	3368	3452	3553	3580	3541	3461	3346	3255						
65	2434	2391	2407	2465	2580	2661	2762	2778	2756	2669	2559	2458						
70	1602	1597	1595	1651	1758	1856	1916	1921	1905	1837	1716	1612						
75	853	858	860	910	992	1086	1139	1134	1136	1056	952	870						
80	307	302	301	349	401	457	487	487	481	424	368	320						
85	68.4	69.4	68.7	77.6	95.4	113	117	115	116	102	84.0	71.0						
90	11.9	11.9	11.8	11.3	10.7	10.9	15.6	19.3	19.3	10.1	10.1	10.4						
95	17.2	17.3	17.2	16.6	15.7	15.0	12.4	12.2	12.2	12.6	13.0	13.3						
100	23.3	23.4	23.3	22.6	21.6	20.8	15.6	15.5	15.4	15.8	16.3	16.7						
105	29.7	29.9	29.7	29.1	28.0	27.2	19.2	19.1	19.1	19.5	19.9	20.3						
110	36.1	36.3	36.1	35.5	34.4	33.5	23.5	23.1	23.1	23.6	24.2	24.6						
115	42.5	42.7	42.5	41.9	40.7	39.8	27.8	27.4	27.5	28.0	28.7	29.0						
120	48.5	48.7	48.5	47.9	46.8	46.0	32.6	32.1	32.1	32.7	33.3	33.8						
125	54.7	54.9	54.7	54.1	52.9	52.1	37.7	37.2	37.2	37.8	38.5	39.0						
130	61.2	61.4	61.2	60.7	59.4	58.5	42.8	42.3	42.4	42.9	43.6	44.1						
135	67.7	67.9	67.6	67.0	65.8	64.9	48.8	48.2	48.3	48.8	49.5	50.0						
140	73.7	73.8	73.6	73.0	71.9	71.1	54.6	54.0	54.2	54.6	55.3	55.7						
145	79.2	79.2	79.0	78.4	77.4	76.6	60.4	59.8	59.9	60.4	61.0	61.3						
150	84.0	84.0	83.7	83.2	82.4	81.7	66.2	65.6	65.8	66.0	66.6	66.8						
155	87.9	88.0	87.6	87.3	86.5	85.9	72.2	71.6	71.6	71.9	72.3	72.6						
160	91.2	91.2	90.8	90.6	89.9	89.5	77.2	76.7	76.7	76.9	77.2	77.4						
165	93.8	93.8	93.4	93.2	92.6	92.3	85.8	85.7	85.2	85.7	85.6	86.0						
170	95.7	95.6	95.2	95.2	94.7	94.5	94.4	93.6	93.6	93.5	93.8	93.7						
175	96.8	96.8	96.4	96.4	96.0	96.0	96.4	95.5	95.6	95.3	95.5	95.3						
180	96.7	96.6	96.2	96.2	96.0	96.0	97.2	96.3	96.4	96.0	96.2	95.8						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks: