
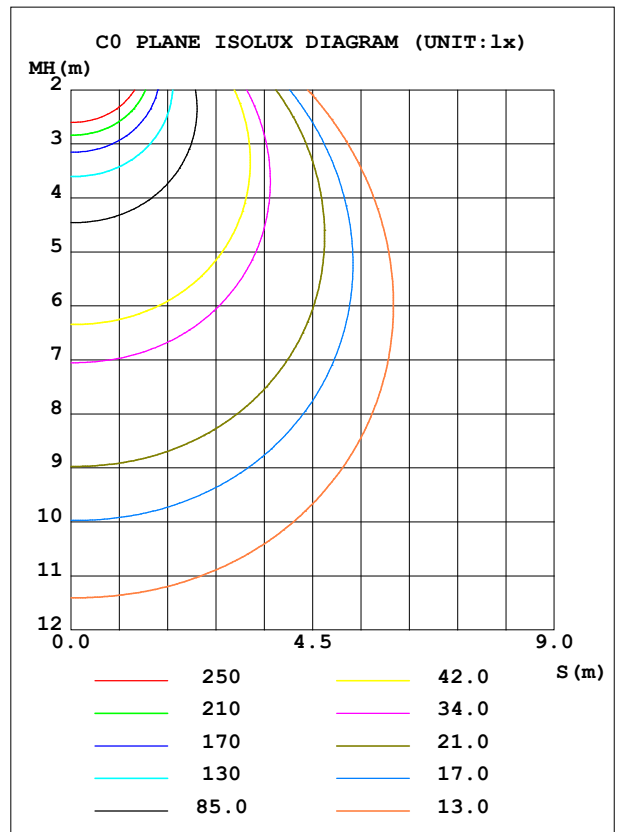


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	ASD-CAN05-A40BR	Imax (cd)	1693	S/MH (C0/180)	1.38
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.41
RATED VOLTAGE (V)	277	TOTAL FLUX (lm)	6061.1	<input type="checkbox"/> UP, DN (C0-180)	1.3, 47.7
NOMINAL FLUX (lm)	6061	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	1.5, 49.4
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	2.9	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	277	<input type="checkbox"/> down (%)	97.1	CIBSE SHR MAX	1.55

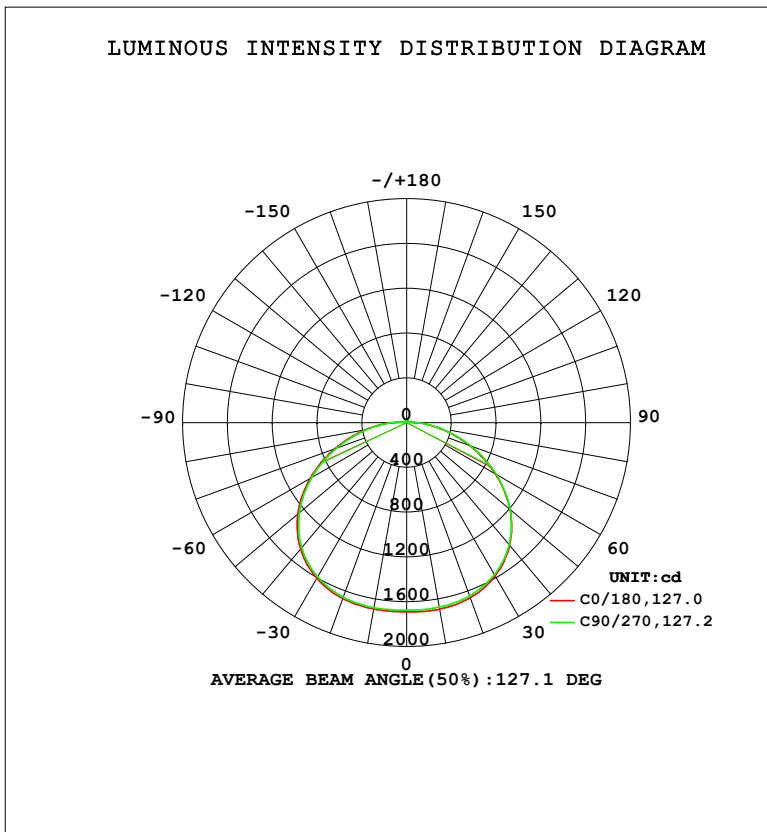

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1692	1681	1674	1671	1690	1683	1678	1675	0- 10	160.3	160.3	2.65,2.65
20	1664	1653	1646	1648	1671	1668	1659	1654	10- 20	473.3	633.7	10.5,10.5
30	1582	1571	1568	1579	1605	1606	1590	1581	20- 30	751.2	1385	22.8,22.8
40	1431	1420	1424	1444	1475	1479	1458	1440	30- 40	953.5	2338	38.6,38.6
50	1204	1195	1206	1235	1269	1276	1250	1224	40- 50	1039	3377	55.7,55.7
60	915.7	907.9	923.8	959.3	995.5	1004	976.7	944.5	50- 60	981.2	4358	71.9,71.9
70	597.7	588.8	610.2	645.7	683.3	690.3	664.7	628.0	60- 70	789.0	5147	84.9,84.9
80	298.2	288.1	310.5	338.1	375.1	377.8	360.2	323.4	70- 80	509.8	5657	93.3,93.3
90	92.09	83.52	97.06	109.2	133.6	131.8	124.9	101.9	80- 90	230.4	5888	97.1,97.1
100	46.73	36.86	44.69	36.84	47.52	42.46	49.26	40.90	90-100	71.71	5959	98.3,98.3
110	28.83	22.61	20.29	22.87	23.15	28.71	24.04	27.21	100-110	36.19	5995	98.9,98.9
120	15.31	16.02	14.95	16.43	17.53	21.23	17.22	19.93	110-120	20.02	6015	99.2,99.2
130	13.98	13.05	13.73	13.29	15.93	16.73	15.80	15.89	120-130	13.91	6029	99.5,99.5
140	13.44	12.44	13.61	12.39	15.08	14.50	15.14	14.14	130-140	10.89	6040	99.7,99.7
150	13.39	13.35	13.64	13.15	14.55	14.36	14.57	14.43	140-150	8.643	6049	99.8,99.8
160	14.34	14.26	14.47	14.12	14.90	14.77	14.97	14.87	150-160	6.583	6055	99.9,99.9
170	15.18	15.09	15.22	14.98	15.40	15.23	15.44	15.21	160-170	4.211	6060	100,100
180	15.87	15.65	15.74	15.64	15.89	15.68	15.76	15.66	170-180	1.470	6061	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2855.7 lm

%lum = 47.1%

%lamp = 47.1%

Conical surface Flux(130deg): 4783.8 lm

%lum = 78.9%


%lamp = 78.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

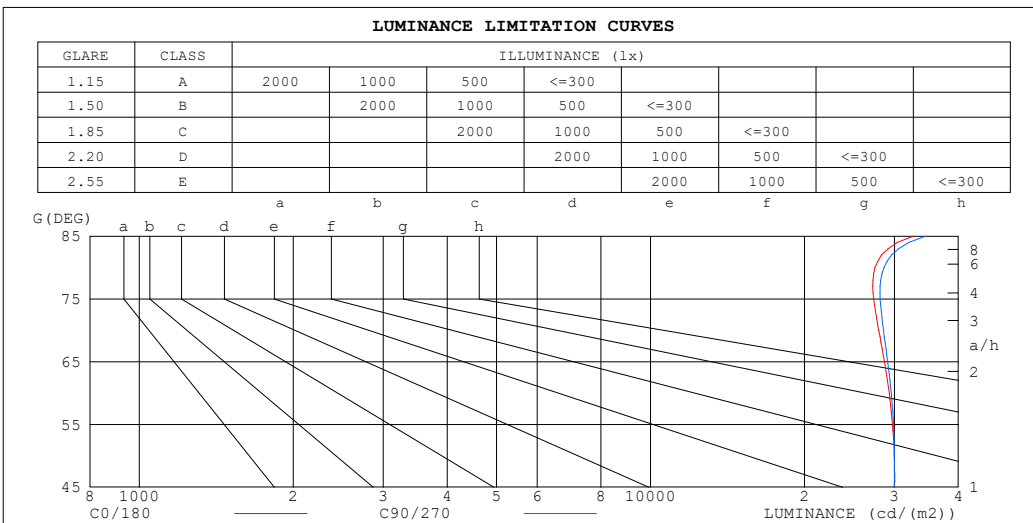

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	32634	34431
80	27474	28609
75	27321	28135
70	27961	28545
65	28691	29097
60	29302	29563
55	29736	29882
50	29973	30013
45	30018	29956


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.97	.92	.99	.95	.91	.94	.91	.87	.90	.87	.84	.86	.83	.81	.79
2.0	.88	.80	.74	.85	.79	.73	.81	.76	.71	.78	.73	.69	.74	.70	.67	.64
3.0	.76	.68	.61	.74	.66	.60	.71	.64	.58	.68	.62	.57	.65	.60	.56	.53
4.0	.67	.58	.51	.66	.57	.50	.63	.55	.49	.60	.54	.48	.57	.52	.47	.45
5.0	.60	.50	.43	.58	.50	.43	.56	.48	.42	.54	.47	.41	.51	.45	.41	.38
6.0	.53	.44	.38	.52	.44	.37	.50	.42	.37	.48	.41	.36	.46	.40	.36	.33
7.0	.48	.39	.33	.47	.39	.33	.46	.38	.32	.44	.37	.32	.42	.36	.31	.29
8.0	.44	.35	.29	.43	.35	.29	.42	.34	.29	.40	.33	.28	.39	.32	.28	.26
9.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.29	.25	.23
10.0	.37	.29	.23	.36	.29	.23	.35	.28	.23	.34	.27	.23	.33	.27	.23	.21

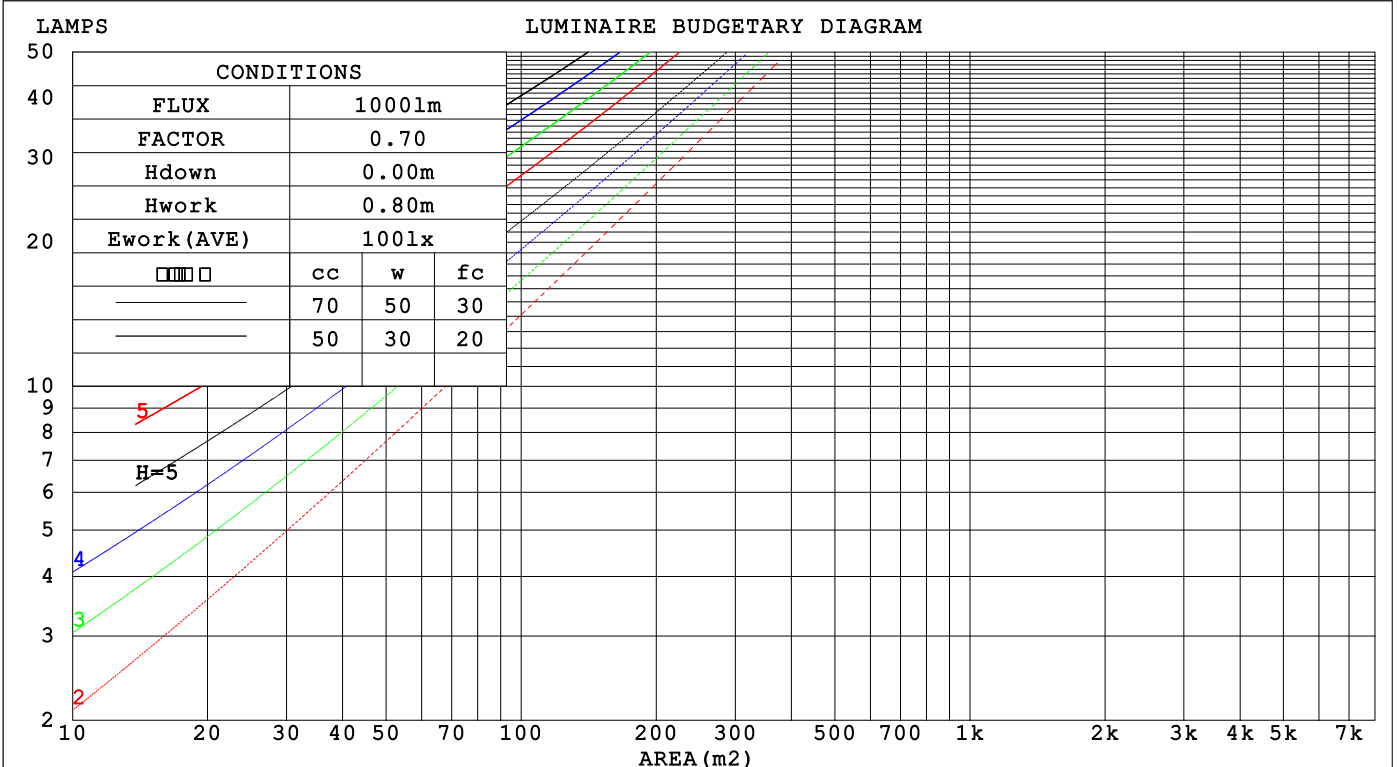

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.342	.195	.062	.334	.191	.061	.319	.183	.058	.305	.176	.056	.292	.169	.055	
2.0	.313	.171	.053	.306	.168	.052	.292	.162	.050	.280	.157	.049	.268	.152	.048	
3.0	.285	.152	.045	.279	.149	.045	.267	.145	.044	.256	.140	.043	.246	.136	.042	
4.0	.261	.136	.040	.255	.134	.039	.244	.130	.039	.235	.126	.038	.225	.122	.037	
5.0	.239	.122	.035	.234	.120	.035	.225	.117	.034	.216	.114	.034	.208	.111	.033	
6.0	.221	.111	.032	.216	.109	.031	.208	.107	.031	.200	.104	.031	.192	.101	.030	
7.0	.205	.101	.029	.201	.100	.029	.193	.098	.028	.186	.095	.028	.179	.093	.027	
8.0	.191	.093	.026	.187	.092	.026	.180	.090	.026	.174	.088	.025	.168	.086	.025	
9.0	.178	.086	.024	.175	.085	.024	.169	.083	.024	.163	.082	.023	.157	.080	.023	
10.0	.167	.080	.022	.164	.079	.022	.159	.078	.022	.153	.076	.022	.148	.075	.021	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.212	.212	.212	.181	.181	.181	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.205	.178	.154	.175	.153	.132	.120	.105	.092	.069	.061	.053	.022	.020	.017	
2.0	.197	.154	.118	.169	.133	.102	.116	.092	.071	.067	.053	.042	.021	.017	.014	
3.0	.190	.137	.094	.163	.118	.082	.112	.082	.057	.064	.048	.034	.021	.016	.011	
4.0	.182	.124	.079	.156	.107	.069	.107	.074	.048	.062	.044	.029	.020	.014	.009	
5.0	.175	.113	.068	.150	.098	.059	.103	.069	.042	.060	.040	.025	.019	.013	.008	
6.0	.167	.105	.061	.144	.091	.053	.099	.064	.037	.058	.037	.022	.019	.012	.007	
7.0	.160	.098	.055	.138	.085	.048	.095	.060	.034	.055	.035	.020	.018	.012	.007	
8.0	.154	.093	.051	.132	.080	.044	.092	.056	.031	.053	.033	.019	.017	.011	.006	
9.0	.147	.088	.047	.127	.076	.041	.088	.053	.029	.051	.032	.017	.017	.010	.006	
10.0	.142	.083	.045	.122	.072	.039	.085	.051	.028	.049	.030	.017	.016	.010	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm										
NAME: ASD-CAN05-A40BR										
SPEC.: 5000K										
MFR.: ASD Lighting Corp										

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.5	26.0	24.8	26.3	26.5	24.5	26.0	24.8	26.3	26.6
3H	26.1	27.5	26.4	27.8	28.1	26.2	27.6	26.5	27.9	28.2
4H	26.8	28.2	27.2	28.5	28.8	26.9	28.3	27.3	28.6	28.9
6H	27.4	28.7	27.8	29.0	29.4	27.5	28.8	27.9	29.1	29.5
8H	27.6	28.9	28.0	29.2	29.6	27.8	29.0	28.2	29.3	29.7
12H	27.9	29.1	28.3	29.4	29.8	28.0	29.2	28.4	29.6	29.9
4H 2H	25.1	26.4	25.4	26.8	27.1	25.1	26.5	25.5	26.8	27.1
3H	26.9	28.1	27.3	28.5	28.8	27.0	28.2	27.4	28.5	28.9
4H	27.8	28.8	28.2	29.2	29.6	27.8	28.9	28.3	29.3	29.7
6H	28.5	29.5	28.9	29.9	30.3	28.6	29.6	29.0	30.0	30.4
8H	28.8	29.7	29.3	30.1	30.6	28.9	29.8	29.4	30.3	30.7
12H	29.1	29.9	29.6	30.4	30.9	29.2	30.1	29.7	30.5	31.0
8H 4H	28.1	29.0	28.5	29.4	29.8	28.1	29.0	28.6	29.5	29.9
6H	29.0	29.7	29.5	30.2	30.7	29.1	29.8	29.6	30.3	30.8
8H	29.4	30.1	29.9	30.6	31.1	29.5	30.2	30.0	30.7	31.2
12H	29.8	30.4	30.4	30.9	31.5	30.0	30.6	30.5	31.1	31.6
12H 4H	28.1	28.9	28.6	29.4	29.8	28.2	29.0	28.6	29.4	29.9
6H	29.1	29.8	29.6	30.2	30.7	29.2	29.8	29.7	30.3	30.8
8H	29.6	30.2	30.1	30.7	31.2	29.7	30.3	30.2	30.8	31.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 6061 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 6.3)
 Area: 0.0625 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 180DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.600m [K=1.0000]
Test Date:2023-12-19	Remarks:

UTILIZATION FACTORS TABLE

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	53	42	34	52	41	34	28
0.80	64	52	44	63	51	44	61	50	43	36
1.00	72	60	53	71	60	52	68	61	52	44
1.25	79	68	60	78	67	60	75	66	59	51
1.50	85	74	66	83	73	66	79	71	64	56
2.00	92	82	75	90	81	74	86	78	73	64
2.50	96	87	81	94	86	80	89	83	77	68
3.00	99	92	86	97	90	84	92	87	82	72
4.00	104	97	92	101	95	90	96	92	87	78
5.00	106	101	96	104	99	94	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

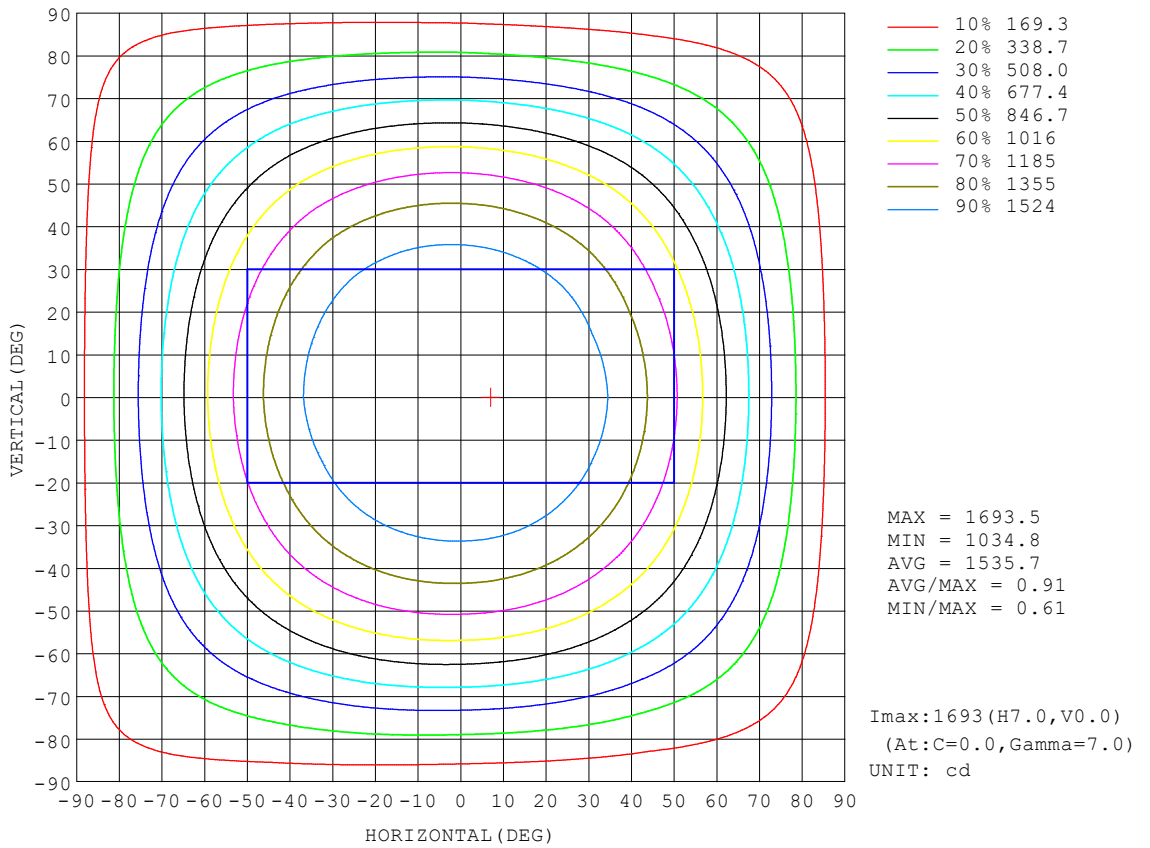


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

AAI Figure

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

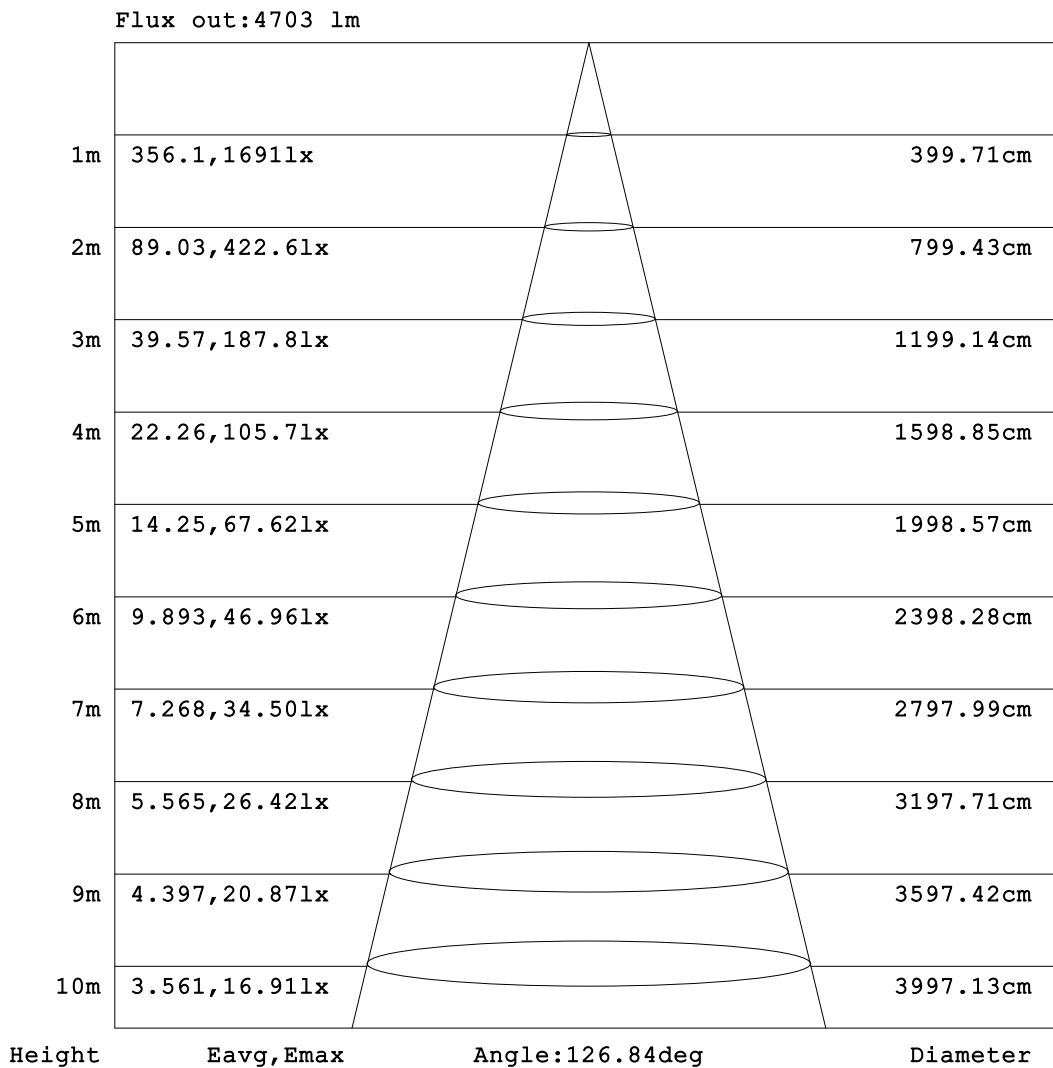


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

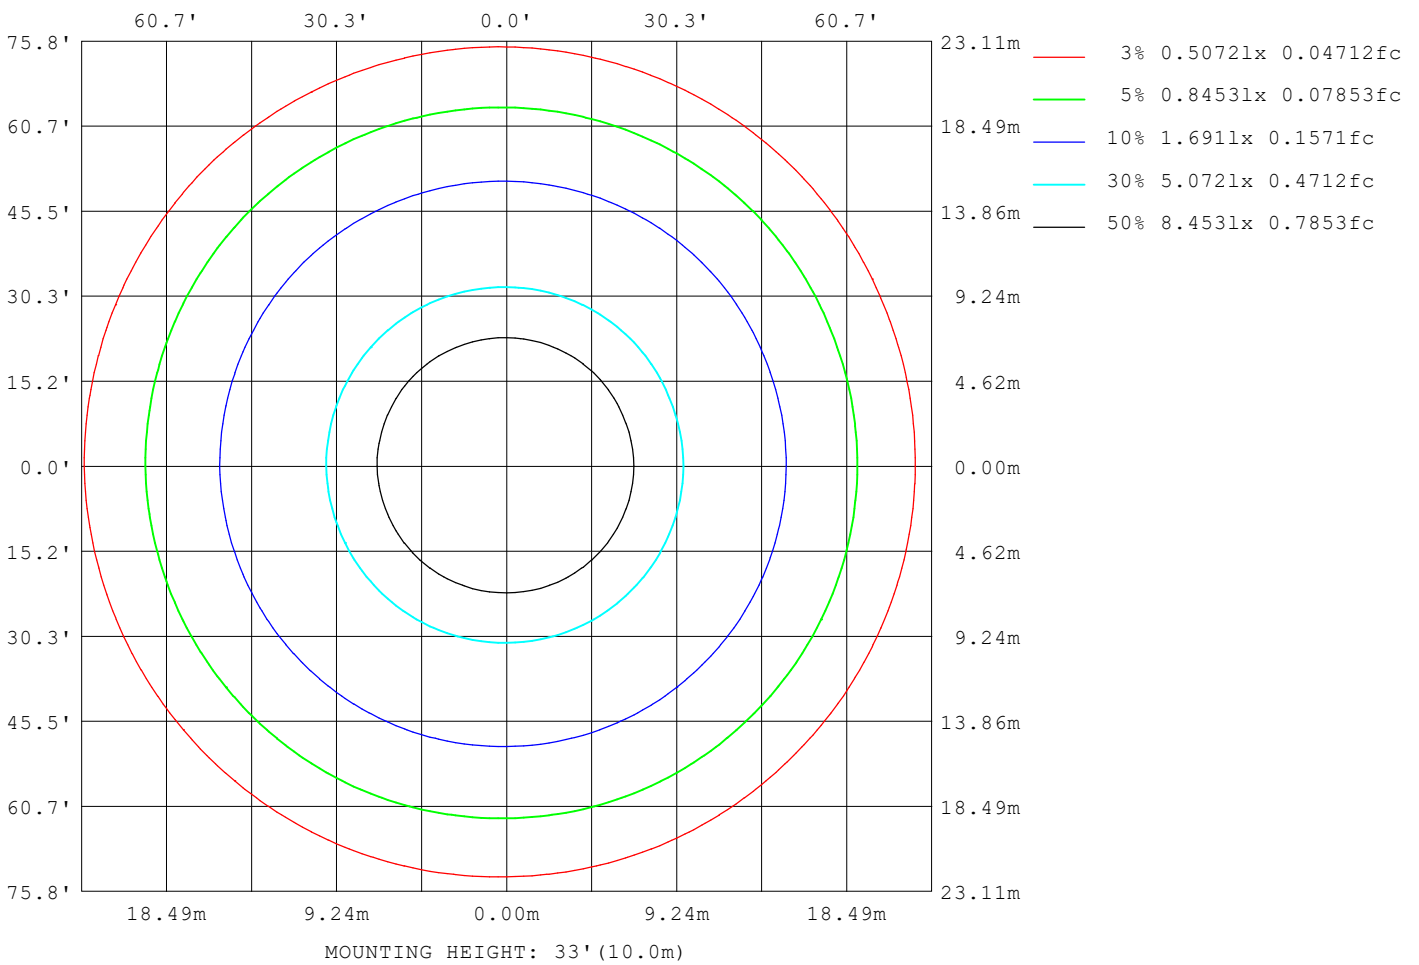

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp


AvgL	cd/m2
L_0~180 (65) av	30284
L_0~180 (75) av	29889
L_0~180 (85) av	38412
L_90~270 (65) av	30133
L_90~270 (75) av	29772
L_90~270 (85) av	38203
L_45 (65) av	30232
L_45 (75) av	29674
L_45 (85) av	37311

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

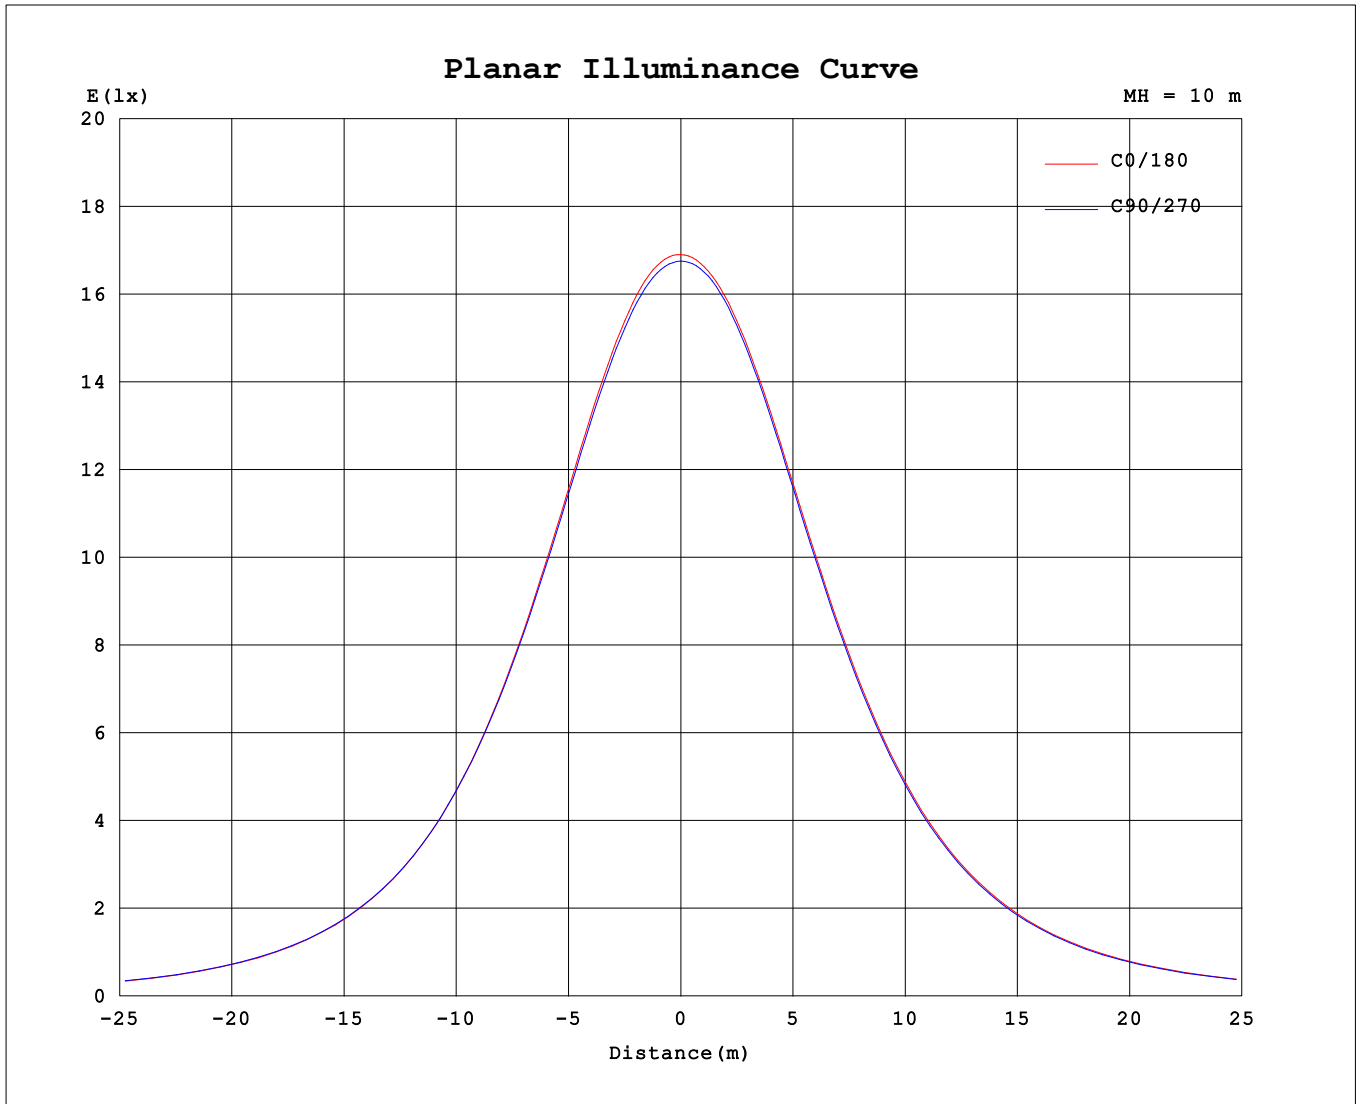

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-12-19

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:278.28V I:0.1635A P:41.758W PF:0.9175 Freq:50.01Hz UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:6061.13x1 lm
NAME: ASD-CAN05-A40BR
SPEC.: 5000K
MFR.: ASD Lighting Corp

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1691	1685	1682	1678	1675	1673	1672	1672	1691	1685	1682	1678	1675	1673	1672	1672			
5	1693	1688	1683	1679	1675	1674	1672	1672	1690	1686	1682	1680	1678	1676	1674	1674			
10	1692	1686	1681	1677	1674	1672	1671	1672	1690	1686	1683	1681	1678	1677	1675	1674			
15	1683	1676	1672	1668	1665	1663	1664	1667	1685	1682	1680	1677	1673	1671	1669	1666			
20	1664	1656	1653	1650	1646	1646	1648	1653	1671	1668	1668	1664	1659	1656	1654	1649			
25	1630	1623	1620	1618	1614	1616	1621	1627	1645	1643	1644	1639	1632	1627	1625	1618			
30	1582	1574	1571	1570	1568	1572	1579	1587	1605	1604	1606	1599	1590	1584	1581	1572			
35	1516	1508	1505	1505	1505	1512	1521	1530	1549	1550	1552	1544	1534	1525	1520	1508			
40	1431	1423	1420	1422	1424	1433	1444	1454	1475	1476	1479	1469	1458	1448	1440	1425			
45	1327	1319	1316	1320	1324	1336	1348	1360	1381	1384	1387	1376	1363	1352	1341	1323			
50	1204	1197	1195	1201	1206	1221	1235	1248	1269	1273	1276	1264	1250	1237	1224	1204			
55	1066	1059	1057	1064	1071	1089	1104	1119	1139	1144	1148	1135	1120	1106	1091	1068			
60	916	910	908	916	924	944	959	975	995	1001	1004	992	977	960	945	921			
65	758	752	750	760	769	789	805	822	842	848	850	838	823	806	789	765			
70	598	592	589	600	610	630	646	664	683	688	690	679	665	646	628	606			
75	442	436	432	444	455	474	488	507	525	530	530	521	508	488	470	451			
80	298	293	288	301	310	327	338	358	375	377	378	370	360	340	323	308			
85	178	172	168	178	188	200	208	227	241	242	241	236	229	211	196	186			
90	92.1	87.9	83.5	91.2	97.1	104	109	123	134	135	132	131	125	113	102	97.6			
95	56.0	52.0	47.7	52.5	55.7	56.1	56.1	64.1	71.0	70.0	67.1	69.0	68.0	61.9	55.6	56.8			
100	46.7	42.2	36.9	41.7	44.7	41.3	36.8	41.8	47.5	45.3	42.5	47.3	49.3	45.1	40.9	45.2			
105	41.2	35.5	28.8	32.7	26.3	33.5	28.2	30.3	35.1	35.3	34.1	39.4	29.1	37.4	33.6	39.5			
110	28.8	25.0	22.6	22.2	20.3	24.7	22.9	19.9	23.1	26.7	28.7	30.7	24.0	27.6	27.2	30.2			
115	18.2	17.1	18.8	16.5	16.2	18.7	19.1	16.0	18.8	22.2	24.6	23.1	19.3	19.4	23.0	22.6			
120	15.3	14.1	16.0	14.1	14.9	15.9	16.4	13.4	17.5	19.2	21.2	19.4	17.2	16.3	19.9	19.3			
125	14.4	12.9	14.3	13.2	14.1	14.3	14.6	12.6	16.2	17.1	18.7	17.4	16.2	15.0	17.6	17.5			
130	14.0	12.5	13.0	12.8	13.7	13.4	13.3	12.2	15.9	15.8	16.7	16.1	15.8	14.3	15.9	16.3			
135	13.7	12.4	12.5	12.8	13.8	13.1	12.6	12.3	15.5	15.1	15.3	15.3	15.5	14.1	14.7	15.5			
140	13.4	12.6	12.4	12.9	13.6	13.0	12.4	12.4	15.1	14.7	14.5	14.9	15.1	14.1	14.1	14.8			
145	13.2	12.9	12.8	13.1	13.5	13.0	12.6	12.7	14.8	14.5	14.2	14.6	14.9	14.2	14.2	14.5			
150	13.4	13.3	13.4	13.4	13.6	13.4	13.2	13.1	14.6	14.4	14.4	14.5	14.6	14.4	14.4	14.5			
155	13.9	13.8	13.8	13.9	14.0	13.8	13.7	13.5	14.7	14.5	14.6	14.7	14.9	14.7	14.7	14.8			
160	14.3	14.3	14.3	14.3	14.5	14.3	14.1	14.0	14.9	14.7	14.8	14.9	15.0	14.8	14.9	15.0			
165	14.8	14.7	14.7	14.8	14.9	14.7	14.6	14.5	15.1	14.9	15.0	15.1	15.3	15.0	15.0	15.2			
170	15.2	15.1	15.1	15.2	15.2	15.1	15.0	14.9	15.4	15.1	15.2	15.3	15.4	15.3	15.2	15.3			
175	15.6	15.5	15.5	15.5	15.5	15.5	15.4	15.3	15.7	15.4	15.5	15.6	15.6	15.5	15.5	15.6			
180	15.9	15.7	15.6	15.7	15.7	15.7	15.6	15.7	15.9	15.7	15.7	15.7	15.8	15.7	15.7	15.7			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-12-19

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks: