
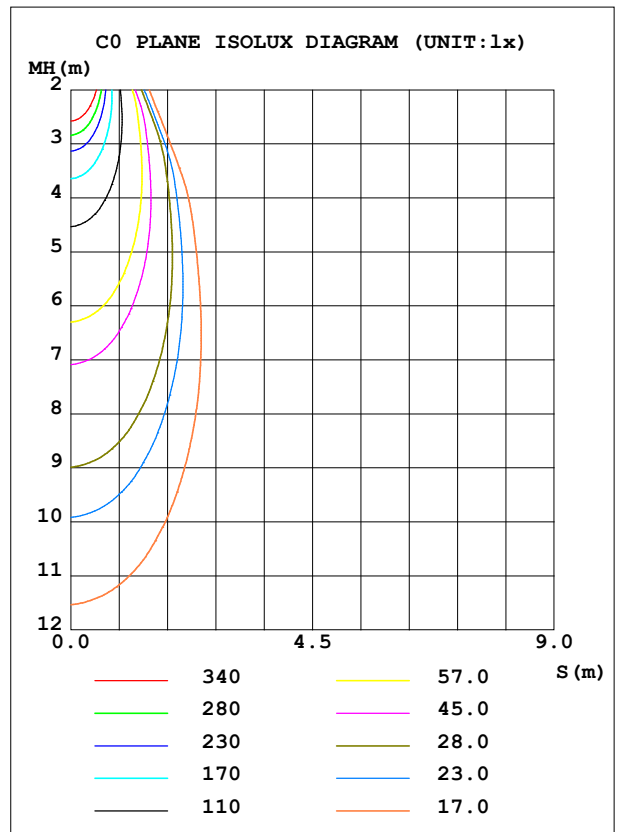


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	2251	S/MH (C0/180)	0.60
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.56
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1071.2	η UP, DN (C0-180)	0.0, 51.3
NOMINAL FLUX (lm)	1071.18	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 48.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.65

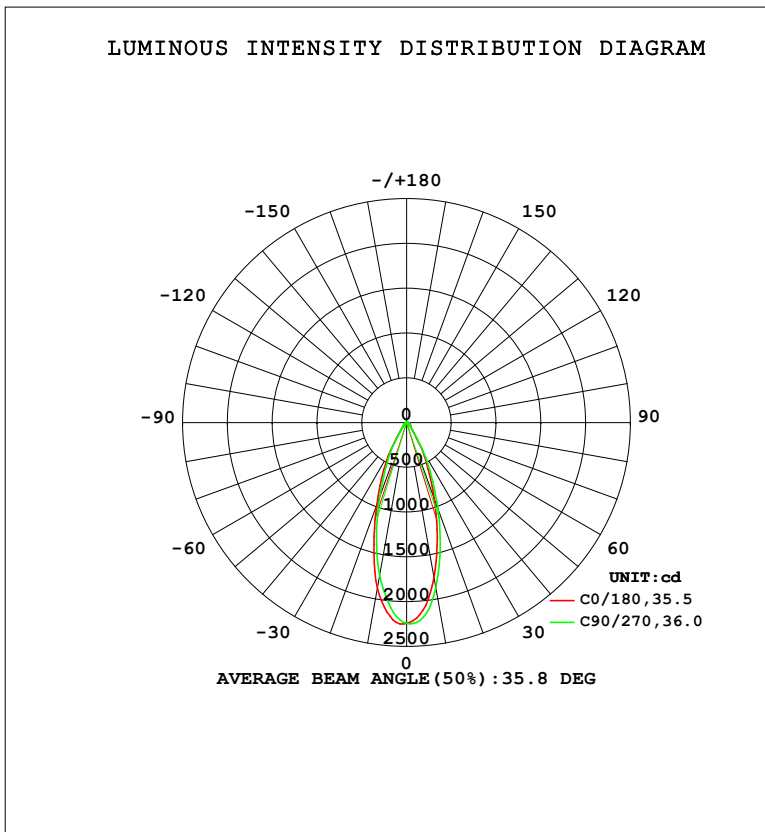

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1764	1862	1876	1869	1880	1750	1735	1740	0- 10	193.0	193.0	18,18
20	905.1	976.7	1029	973.3	980.6	915.2	879.1	916.6	10- 20	376.4	569.4	53.2,53.2
30	336.3	366.3	377.6	364.0	370.6	331.5	323.3	369.7	20- 30	280.8	850.2	79.4,79.4
40	86.42	91.40	88.97	83.77	84.67	83.74	82.33	89.94	30- 40	107.8	958.0	89.4,89.4
50	46.16	46.06	45.32	44.74	45.71	44.82	46.02	46.93	40- 50	46.50	1004	93.8,93.8
60	27.81	27.58	26.47	25.95	26.76	26.55	27.56	28.35	50- 60	31.88	1036	96.7,96.7
70	15.40	15.60	15.12	14.92	15.36	14.89	15.36	15.85	60- 70	20.89	1057	98.7,98.7
80	6.009	6.281	6.096	6.002	6.279	5.911	6.090	6.295	70- 80	11.01	1068	99.7,99.7
90	0.1059	0.0709	0.0797	0.0718	0.0782	0.0676	0.0592	0.0490	80- 90	2.938	1071	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

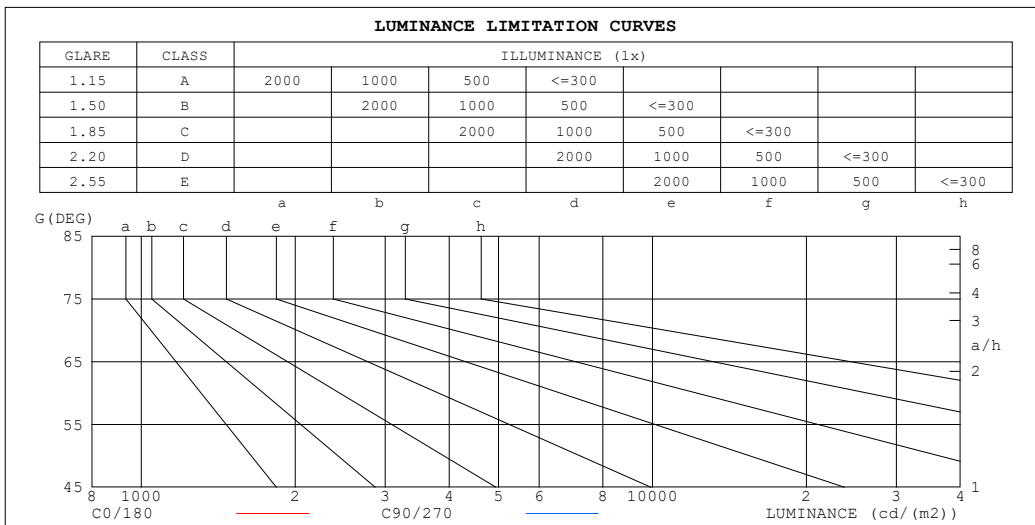

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	264	278
80	314	316
75	359	355
70	409	398
65	460	441
60	505	476
55	569	539
50	652	634
45	732	736


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.94
2.0	1.03	.99	.96	1.02	.98	.95	.98	.96	.93	.95	.93	.91	.93	.91	.89	.87
3.0	.97	.92	.88	.96	.91	.88	.93	.89	.86	.91	.87	.85	.88	.86	.84	.82
4.0	.91	.86	.82	.90	.85	.81	.88	.84	.81	.86	.82	.80	.84	.81	.79	.77
5.0	.86	.81	.77	.85	.80	.76	.84	.79	.76	.82	.78	.75	.80	.77	.74	.73
6.0	.82	.76	.72	.81	.76	.72	.80	.75	.71	.78	.74	.71	.77	.73	.70	.69
7.0	.78	.72	.68	.77	.72	.68	.76	.71	.68	.75	.70	.67	.74	.70	.67	.66
8.0	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.71	.67	.64	.63
9.0	.71	.65	.62	.70	.65	.62	.69	.65	.61	.68	.64	.61	.68	.64	.61	.60
10.0	.68	.62	.59	.67	.62	.59	.66	.62	.59	.66	.61	.58	.65	.61	.58	.57

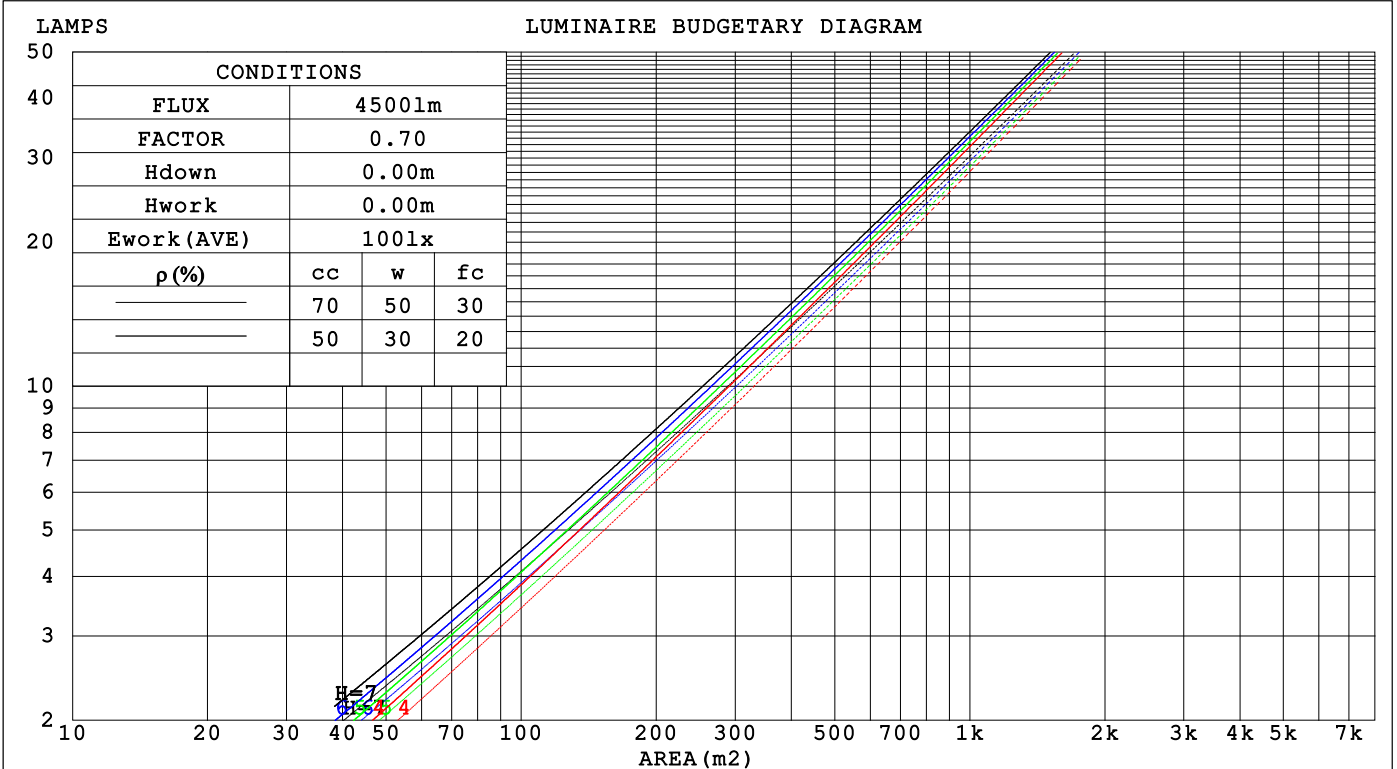

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.178	.101	.032	.171	.098	.031	.158	.091	.029	.147	.085	.027	.136	.079	.025	
2.0	.168	.092	.028	.162	.089	.027	.151	.084	.026	.142	.079	.025	.133	.075	.024	
3.0	.157	.084	.025	.153	.082	.025	.144	.078	.024	.135	.074	.023	.128	.071	.022	
4.0	.148	.077	.023	.144	.075	.022	.136	.072	.022	.129	.069	.021	.122	.067	.020	
5.0	.140	.071	.021	.136	.070	.020	.130	.067	.020	.123	.065	.019	.117	.063	.019	
6.0	.132	.066	.019	.129	.065	.019	.123	.063	.018	.118	.061	.018	.113	.059	.018	
7.0	.126	.062	.018	.123	.061	.017	.118	.059	.017	.113	.058	.017	.108	.056	.017	
8.0	.119	.058	.016	.117	.058	.016	.112	.056	.016	.108	.055	.016	.104	.053	.016	
9.0	.114	.055	.015	.112	.054	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015	
10.0	.109	.052	.015	.107	.052	.014	.103	.051	.014	.100	.050	.014	.097	.049	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.143	.114	.090	.122	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011	
4.0	.132	.099	.073	.113	.085	.064	.078	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.123	.087	.061	.105	.075	.053	.073	.053	.037	.042	.031	.022	.014	.010	.007	
6.0	.115	.078	.051	.099	.067	.044	.068	.047	.031	.039	.028	.019	.013	.009	.006	
7.0	.108	.070	.043	.093	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.102	.063	.037	.088	.055	.032	.061	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.091	.054	.028	.079	.047	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.2	7.1	6.4	7.3	7.4	6.4	7.2	6.6	7.4	7.6
3H	7.0	7.8	7.3	8.0	8.2	7.1	7.9	7.3	8.1	8.3
4H	7.3	8.1	7.6	8.3	8.5	7.4	8.1	7.6	8.4	8.6
6H	7.5	8.3	7.8	8.5	8.7	7.6	8.3	7.9	8.6	8.8
8H	7.6	8.3	7.9	8.6	8.8	7.6	8.4	8.0	8.6	8.9
12H	7.6	8.3	7.9	8.6	8.8	7.7	8.4	8.0	8.6	8.9
4H 2H	6.5	7.3	6.8	7.5	7.7	6.6	7.4	6.9	7.6	7.8
3H	7.5	8.2	7.8	8.4	8.7	7.5	8.2	7.8	8.5	8.8
4H	7.9	8.5	8.2	8.8	9.1	7.9	8.6	8.3	8.9	9.2
6H	8.2	8.8	8.6	9.1	9.4	8.3	8.8	8.6	9.1	9.5
8H	8.3	8.8	8.7	9.2	9.5	8.4	8.9	8.8	9.2	9.6
12H	8.4	8.8	8.8	9.2	9.6	8.4	8.9	8.8	9.3	9.7
8H 4H	8.0	8.5	8.4	8.9	9.2	8.1	8.6	8.5	8.9	9.3
6H	8.4	8.9	8.9	9.3	9.7	8.5	8.9	8.9	9.3	9.7
8H	8.6	9.0	9.1	9.4	9.8	8.7	9.0	9.1	9.5	9.9
12H	8.7	9.0	9.2	9.5	10.0	8.8	9.1	9.3	9.6	10.0
12H 4H	8.0	8.5	8.4	8.8	9.2	8.0	8.5	8.5	8.9	9.3
6H	8.5	8.8	8.9	9.3	9.7	8.5	8.9	9.0	9.3	9.7
8H	8.7	9.0	9.1	9.4	9.9	8.7	9.0	9.2	9.5	9.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.6	+ 0.6 / - 0.7
1.5H	+ 0.8 / - 0.4	+ 1.0 / - 0.5
2.0H	+ 0.5 / - 0.5	+ 0.6 / - 0.6

CIE Pub.117, 1071 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)
 Area: 0.111111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3°C	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2022-10-14	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	78	74	84	78	74	84	78	74	70
0.80	93	86	82	92	86	82	91	85	82	78
1.00	97	91	87	96	91	87	95	91	86	82
1.25	101	96	92	100	95	92	98	94	91	86
1.50	104	99	96	103	98	95	101	97	94	89
2.00	107	103	99	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	115	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

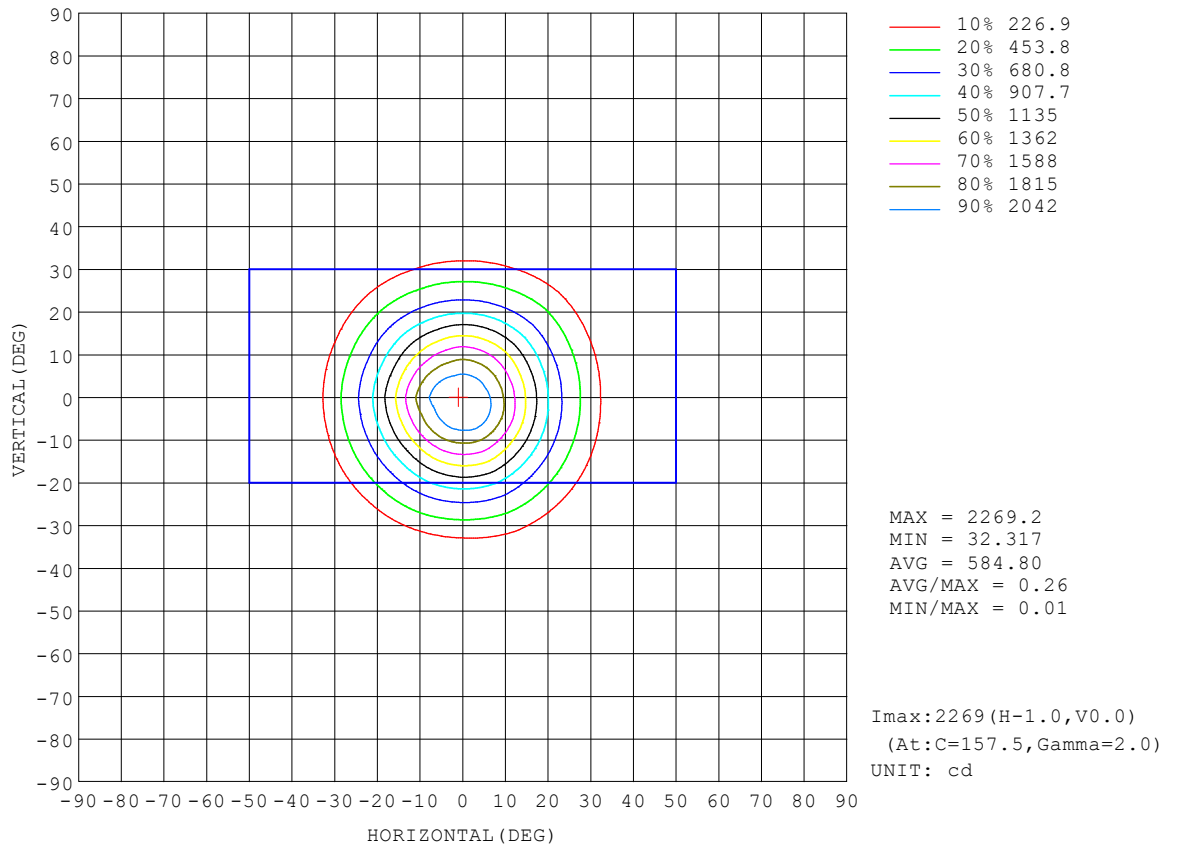


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

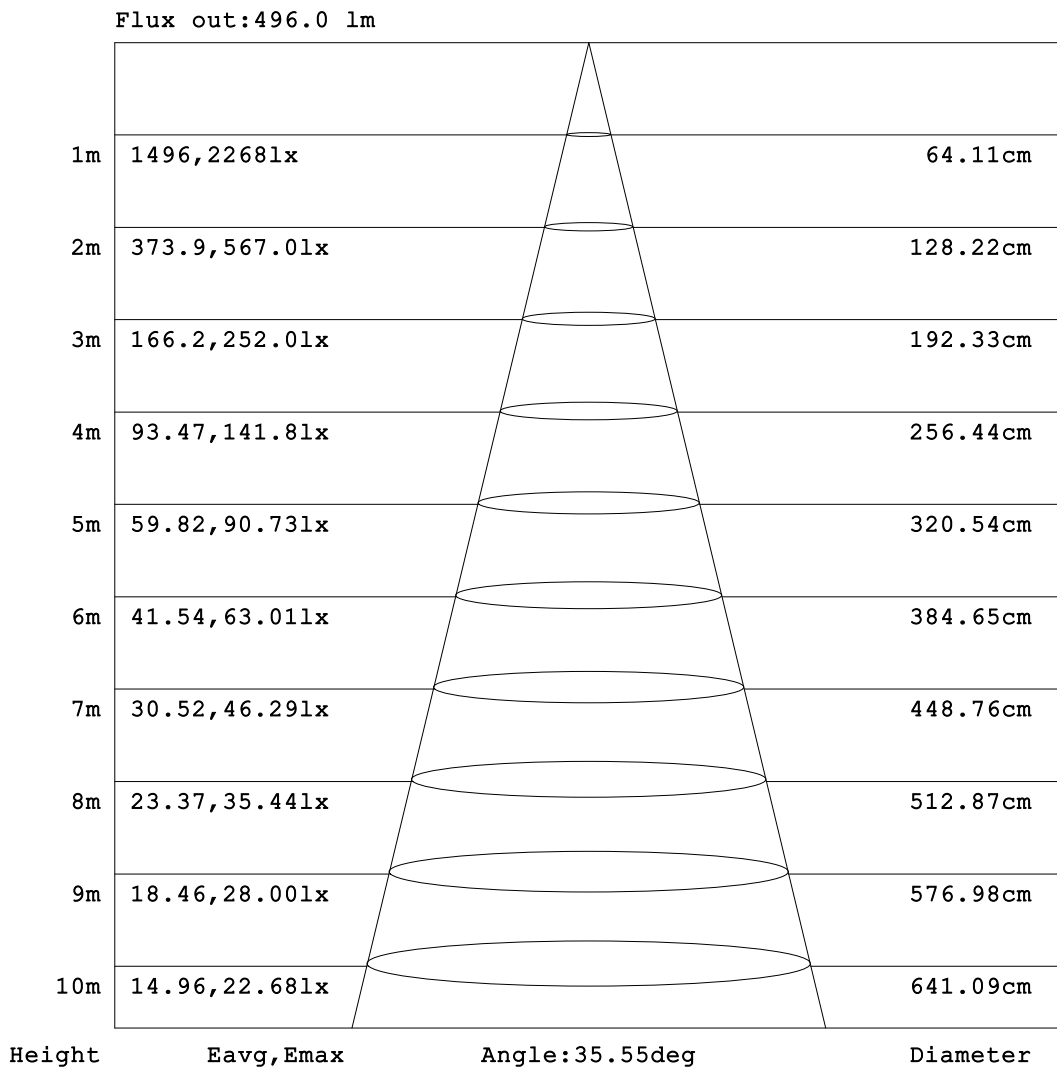


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

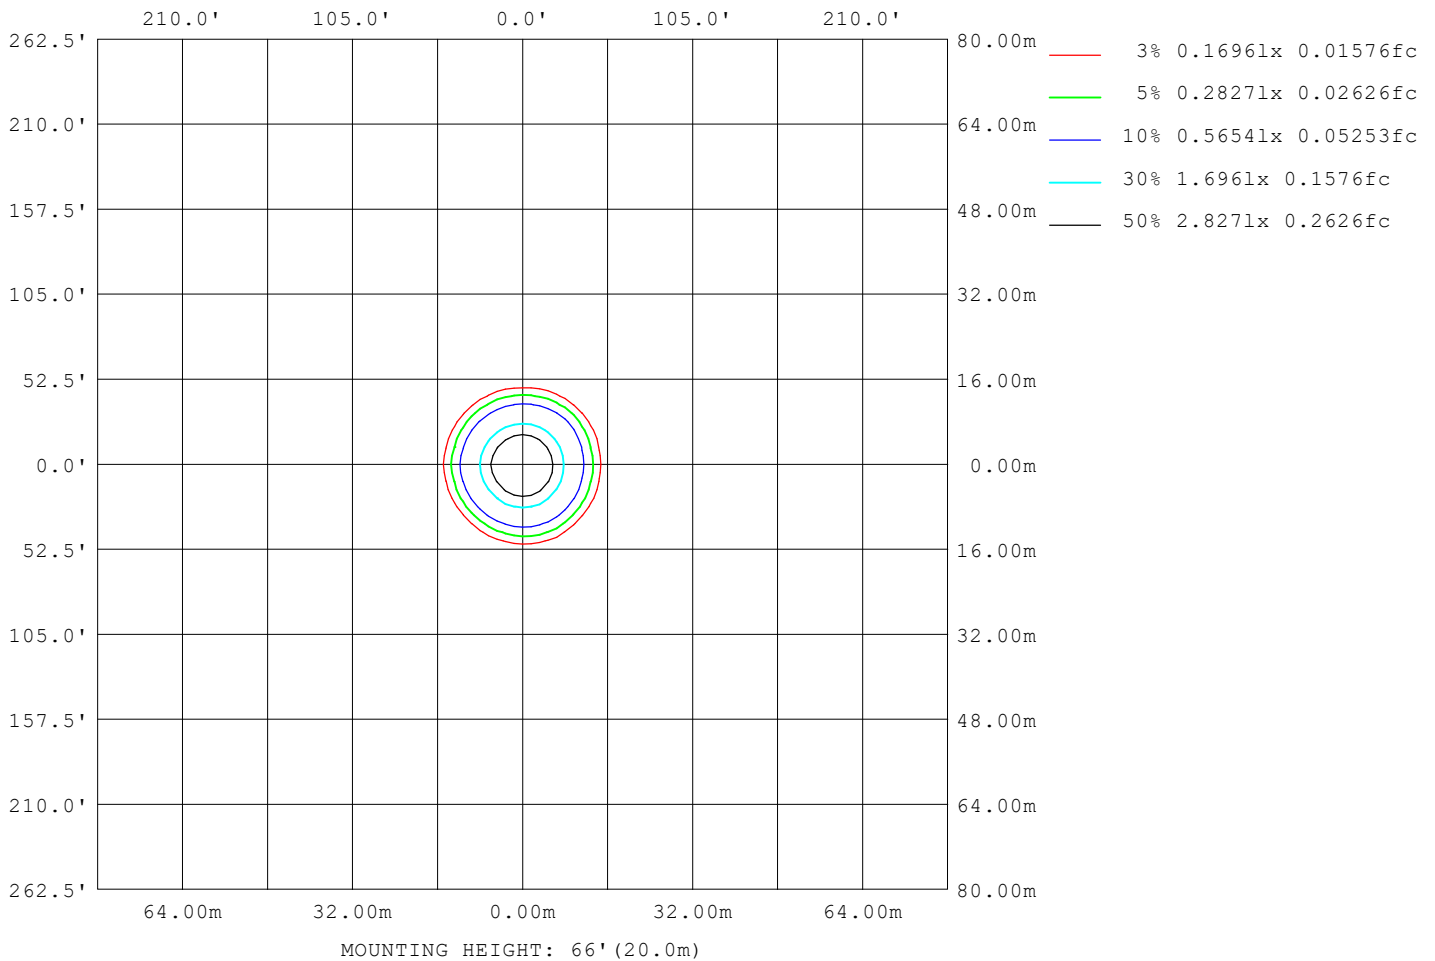

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	451
L_0~180 (75) av	360
L_0~180 (85) av	274
L_90~270 (65) av	447
L_90~270 (75) av	357
L_90~270 (85) av	273
L_45 (65) av	449
L_45 (75) av	358
L_45 (85) av	272

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

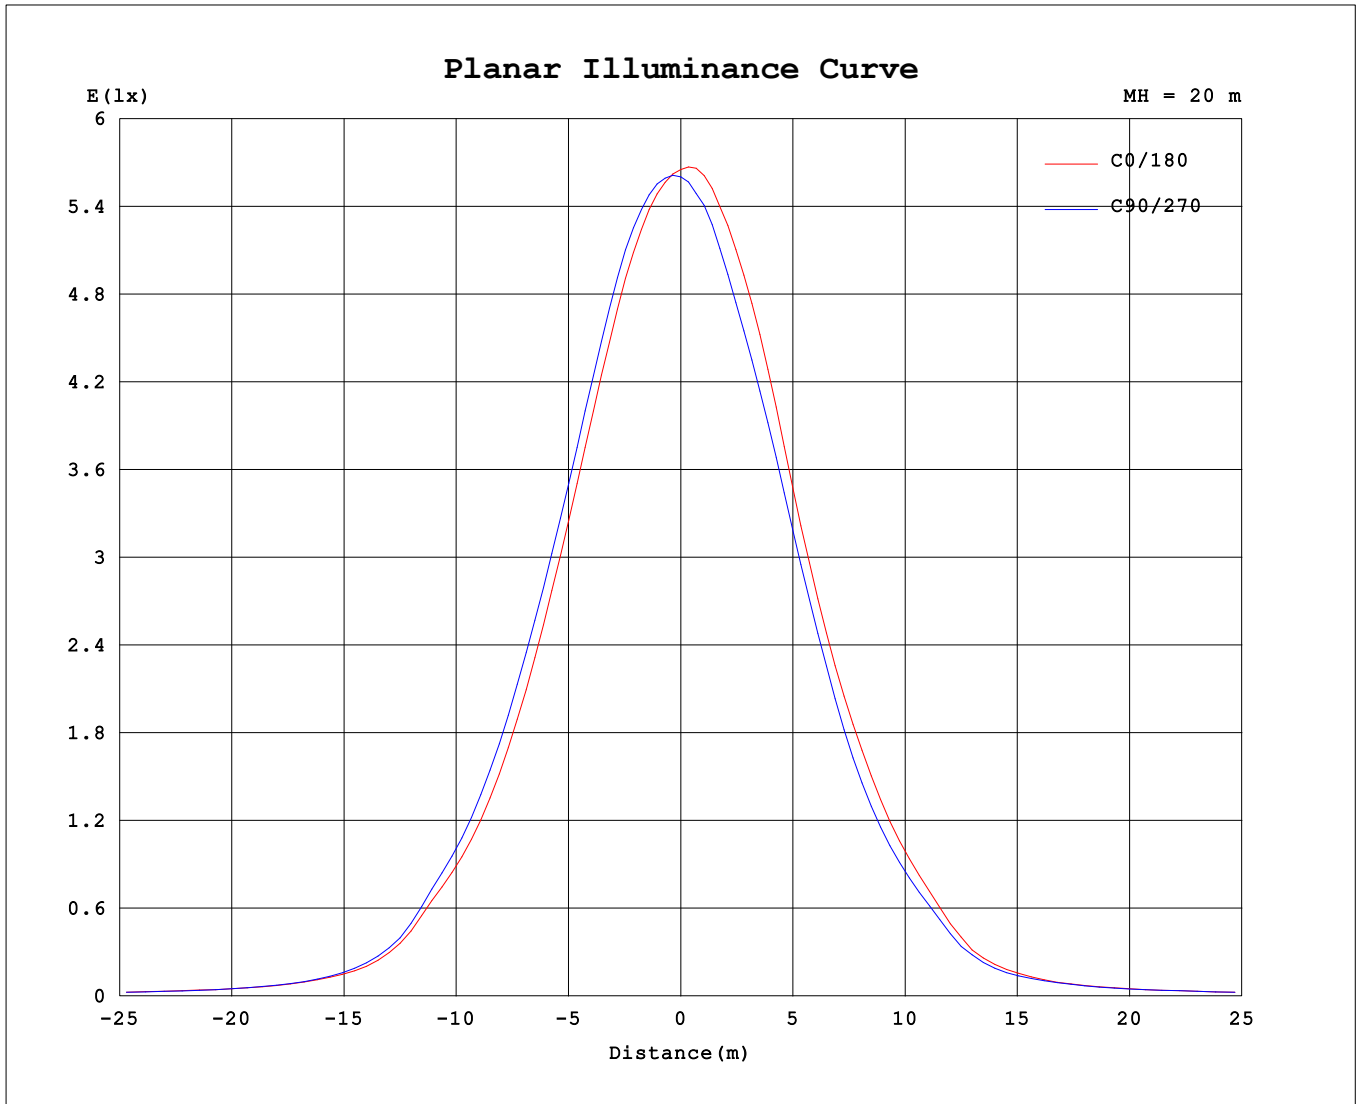

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.86V I:0.1197A P:13.987W PF:0.9745 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1071.18x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2242	2242	2242	2242	2242	2242	2242	2242	2242	2242	2242	2242	2242	2242	2242	2242			
5	2104	2135	2165	2183	2178	2179	2164	2166	2166	2136	2101	2067	2070	2073	2088	2097			
10	1764	1823	1862	1890	1876	1876	1869	1864	1880	1807	1750	1722	1735	1732	1740	1757			
15	1326	1372	1406	1460	1452	1436	1408	1413	1416	1354	1322	1302	1311	1316	1329	1322			
20	905	940	977	1031	1029	1016	973	974	981	927	915	886	879	898	917	903			
25	572	595	628	671	658	654	634	634	638	603	593	558	554	567	596	581			
30	336	347	366	392	378	377	364	367	371	343	332	313	323	341	370	354			
35	148	152	161	176	167	161	153	154	157	149	146	140	139	145	157	152			
40	86.4	88.6	91.4	94.4	89.0	86.6	83.8	83.5	84.7	82.7	83.7	82.0	82.3	84.9	89.9	87.7			
45	57.0	58.2	59.1	59.8	57.9	57.3	56.7	56.8	57.3	56.6	56.6	56.3	56.6	57.0	57.6	56.9			
50	46.2	46.2	46.1	46.2	45.3	45.1	44.7	45.0	45.7	45.0	44.8	44.8	46.0	46.6	46.9	46.6			
55	36.0	35.9	35.6	35.4	34.4	33.9	33.7	34.1	34.7	34.2	34.3	34.6	35.8	36.5	37.0	36.8			
60	27.8	27.9	27.6	27.3	26.5	26.2	26.0	26.2	26.8	26.5	26.6	26.7	27.6	28.0	28.4	28.1			
65	21.4	21.5	21.5	21.3	20.7	20.4	20.4	20.5	20.9	20.6	20.5	20.6	21.3	21.7	22.0	21.8			
70	15.4	15.5	15.6	15.5	15.1	15.0	14.9	15.1	15.4	15.0	14.9	14.9	15.4	15.7	15.9	15.7			
75	10.2	10.4	10.5	10.5	10.2	10.1	10.1	10.3	10.5	10.1	10.0	9.93	10.3	10.5	10.6	10.4			
80	6.01	6.18	6.28	6.33	6.10	6.04	6.00	6.12	6.28	6.03	5.91	5.80	6.09	6.20	6.30	6.15			
85	2.54	2.69	2.81	2.87	2.69	2.60	2.55	2.63	2.76	2.49	2.44	2.39	2.59	2.66	2.72	2.63			
90	0.11	0.07	0.07	0.07	0.08	0.07	0.07	0.07	0.08	0.11	0.07	0.05	0.06	0.05	0.05	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: