
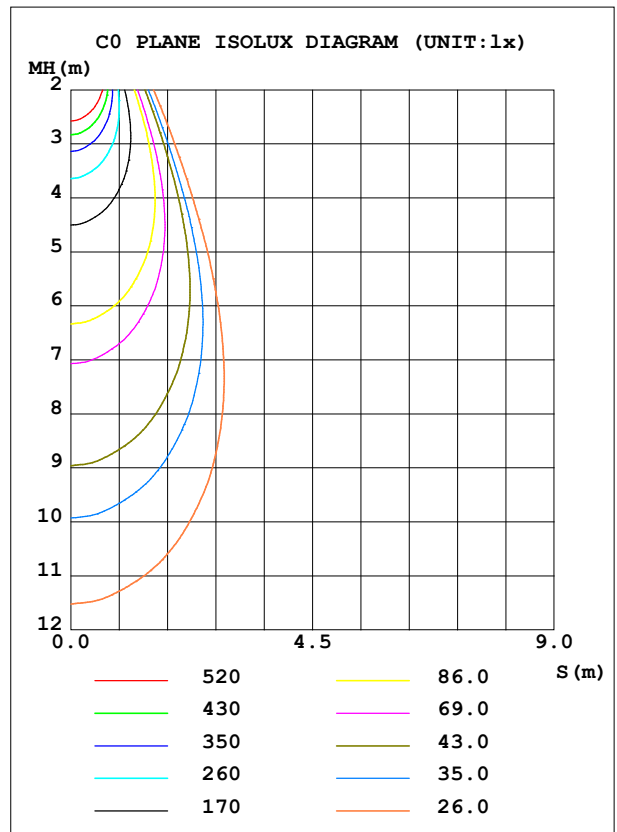


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	3458	S/MH (C0/180)	0.68
NOMINAL POWER (W)	24	LOR (%)	100.0	S/MH (C90/270)	0.69
RATED VOLTAGE (V)	277	TOTAL FLUX (lm)	1960.4	η UP, DN (C0-180)	0.0,49.7
NOMINAL FLUX (lm)	1960.37	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,50.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	277	η down (%)	100.0	CIBSE SHR MAX	0.70

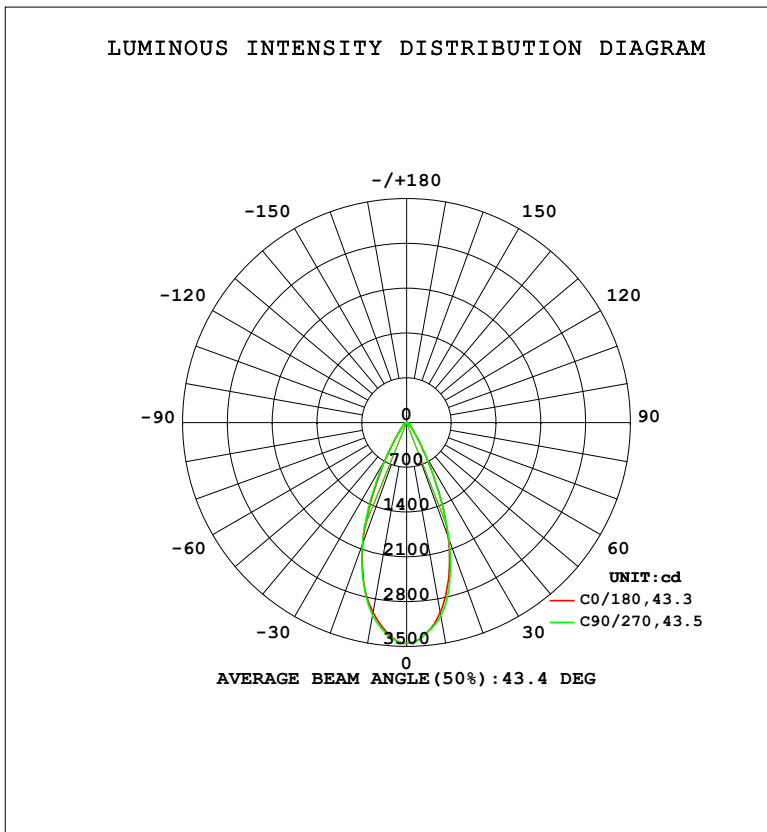

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3018	3036	3069	3079	3020	2982	3062	3101	0- 10	308.5	308.5	15.7,15.7
20	1909	1893	1931	2041	2004	1943	2026	2060	10- 20	710.8	1019	52,52
30	594.1	601.8	612.3	653.8	650.9	640.0	686.6	678.4	20- 30	566.5	1586	80.9,80.9
40	159.6	170.0	173.8	178.2	170.2	169.5	177.3	177.1	30- 40	211.8	1798	91.7,91.7
50	69.10	72.95	72.88	72.71	70.61	71.05	72.42	72.32	40- 50	84.71	1882	96,96
60	37.99	39.77	39.03	38.83	38.41	38.37	39.12	38.92	50- 60	47.91	1930	98.5,98.5
70	9.796	9.903	9.232	9.795	10.31	10.54	11.06	10.15	60- 70	23.51	1954	99.7,99.7
80	2.625	2.602	2.508	2.640	2.692	2.706	2.801	2.658	70- 80	5.297	1959	99.9,99.9
90	0.0868	0.1058	0.0833	0.0807	0.0704	0.0641	0.0651	0.0639	80- 90	1.286	1960	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

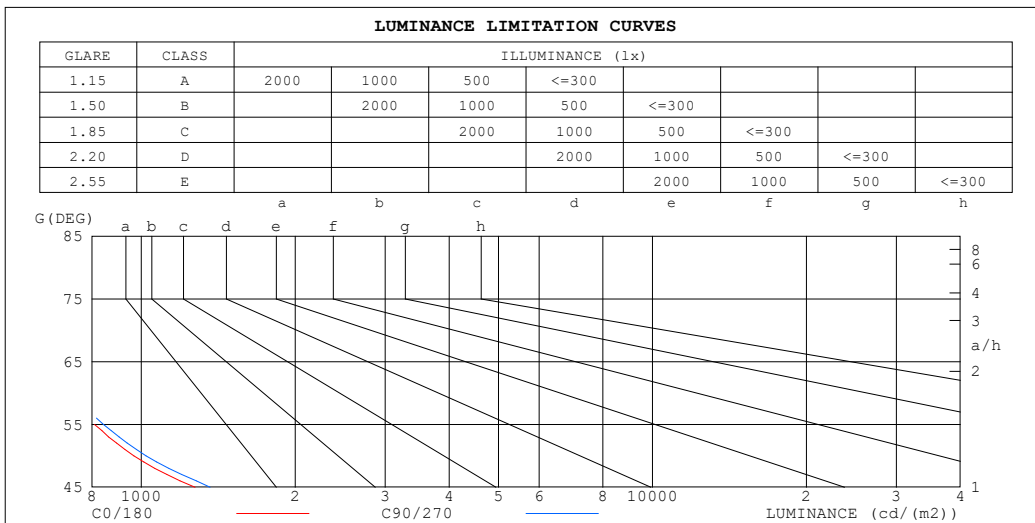

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	118	107
80	136	130
75	151	146
70	258	243
65	503	505
60	683	703
55	810	843
50	967	1021
45	1274	1363


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
	ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.88	.94	.90	.87	.91	.88	.86	.89	.87	.84	.83
4.0	.92	.87	.83	.91	.86	.82	.89	.85	.81	.87	.83	.80	.85	.82	.79	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.80	.76	.82	.79	.76	.81	.78	.75	.74
6.0	.82	.77	.73	.81	.76	.72	.80	.75	.72	.79	.75	.71	.77	.74	.71	.70
7.0	.78	.72	.69	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.66
8.0	.74	.69	.65	.74	.68	.65	.73	.68	.65	.72	.67	.64	.71	.67	.64	.63
9.0	.71	.65	.62	.70	.65	.62	.69	.65	.61	.69	.64	.61	.68	.64	.61	.60
10.0	.68	.62	.59	.67	.62	.59	.66	.62	.59	.66	.61	.58	.65	.61	.58	.57

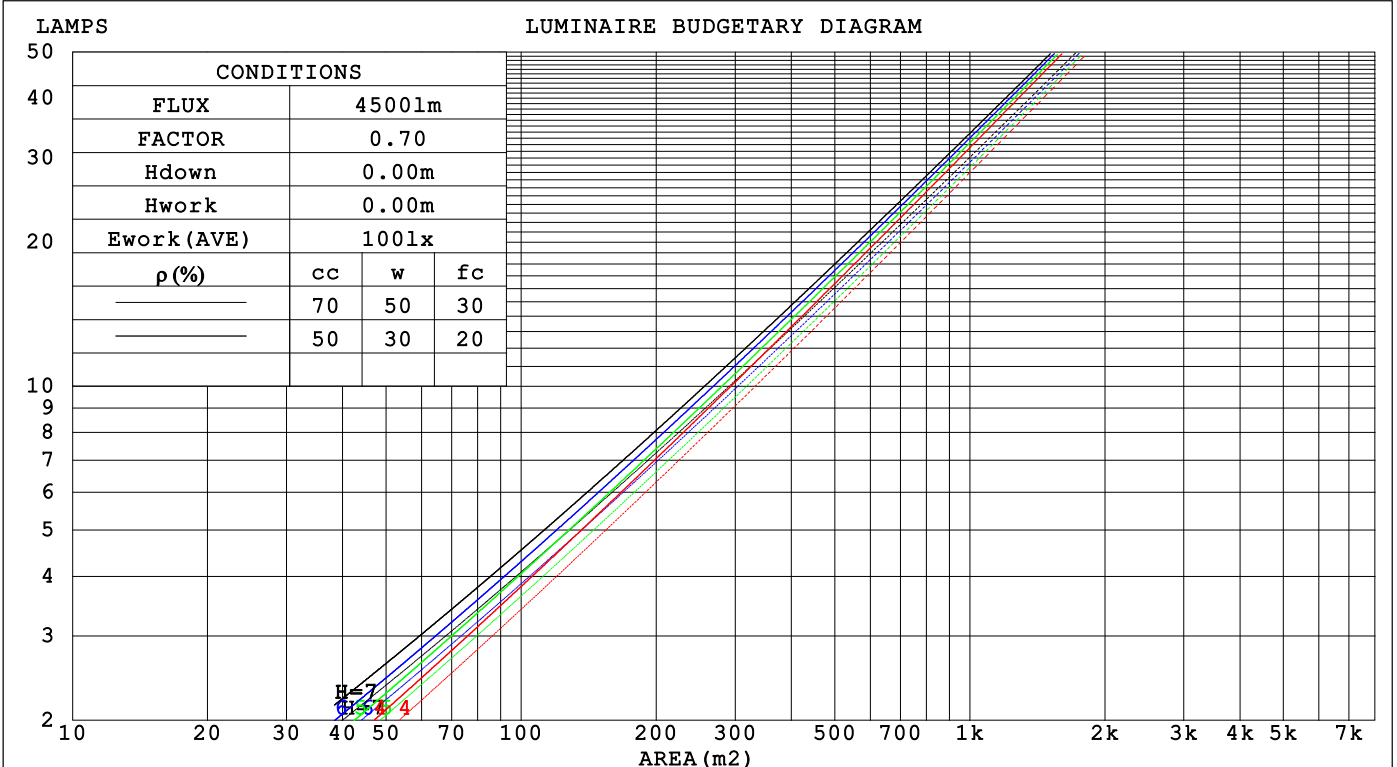

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.170	.097	.031	.164	.093	.030	.151	.087	.028	.140	.081	.026	.129	.075	.024	
2.0	.162	.089	.027	.156	.086	.027	.146	.081	.025	.136	.076	.024	.127	.072	.023	
3.0	.153	.082	.024	.149	.080	.024	.140	.076	.023	.131	.072	.022	.124	.068	.021	
4.0	.145	.075	.022	.141	.074	.022	.133	.071	.021	.126	.068	.020	.120	.065	.020	
5.0	.138	.070	.020	.134	.069	.020	.128	.066	.020	.121	.064	.019	.116	.062	.019	
6.0	.131	.066	.019	.128	.065	.019	.122	.063	.018	.117	.061	.018	.111	.059	.017	
7.0	.125	.062	.017	.122	.061	.017	.117	.059	.017	.112	.057	.017	.108	.056	.016	
8.0	.119	.058	.016	.117	.057	.016	.112	.056	.016	.108	.055	.016	.104	.053	.016	
9.0	.114	.055	.015	.112	.054	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015	
10.0	.109	.052	.015	.107	.052	.014	.104	.051	.014	.100	.050	.014	.097	.049	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.114	.091	.122	.098	.079	.084	.068	.055	.048	.040	.033	.016	.013	.011	
4.0	.131	.099	.074	.113	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.122	.087	.061	.105	.075	.053	.072	.053	.037	.042	.031	.022	.013	.010	.007	
6.0	.114	.077	.051	.098	.067	.044	.068	.047	.031	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.043	.092	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.101	.063	.037	.087	.055	.032	.060	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.092	.054	.028	.079	.047	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.3	6.2	5.6	6.4	6.6	5.8	6.7	6.0	6.8	7.0
3H	5.5	6.3	5.7	6.5	6.7	5.9	6.7	6.1	6.9	7.1
4H	5.4	6.2	5.7	6.4	6.6	5.8	6.6	6.1	6.8	7.0
6H	5.3	6.1	5.6	6.3	6.6	5.8	6.5	6.1	6.7	7.0
8H	5.3	6.0	5.6	6.3	6.5	5.7	6.4	6.0	6.7	6.9
12H	5.3	5.9	5.6	6.2	6.5	5.7	6.4	6.0	6.6	6.9
4H 2H	5.4	6.2	5.7	6.4	6.6	5.8	6.6	6.1	6.8	7.0
3H	5.5	6.2	5.9	6.5	6.8	5.9	6.6	6.3	6.9	7.2
4H	5.5	6.1	5.9	6.4	6.7	5.9	6.5	6.2	6.8	7.1
6H	5.5	6.0	5.8	6.3	6.7	5.8	6.4	6.2	6.7	7.1
8H	5.4	5.9	5.8	6.3	6.6	5.8	6.3	6.2	6.7	7.0
12H	5.4	5.8	5.8	6.2	6.6	5.8	6.2	6.2	6.6	7.0
8H 4H	5.4	5.9	5.8	6.2	6.6	5.8	6.3	6.2	6.6	7.0
6H	5.4	5.8	5.8	6.2	6.6	5.7	6.1	6.2	6.5	6.9
8H	5.3	5.7	5.8	6.1	6.5	5.7	6.1	6.2	6.5	6.9
12H	5.3	5.6	5.8	6.0	6.5	5.7	6.0	6.1	6.4	6.9
12H 4H	5.3	5.8	5.8	6.2	6.6	5.7	6.2	6.1	6.6	6.9
6H	5.3	5.7	5.8	6.1	6.5	5.7	6.0	6.1	6.5	6.9
8H	5.3	5.6	5.8	6.0	6.5	5.7	6.0	6.1	6.4	6.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.4 / - 2.0	+ 1.4 / - 2.2
1.5H	+ 2.4 / - 1.3	+ 2.5 / - 1.5
2.0H	+ 1.7 / - 1.4	+ 1.9 / - 1.5

CIE Pub.117, 1960 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.3)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	87	84	92	87	83	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

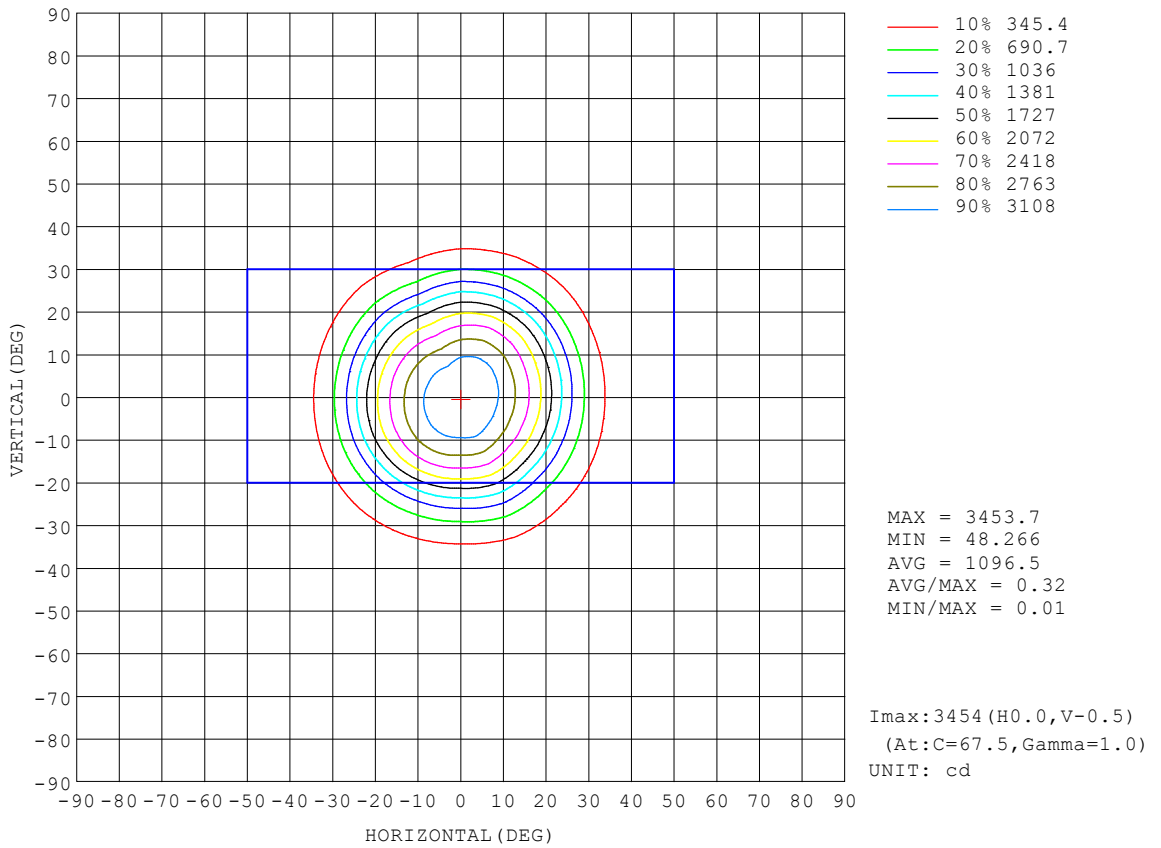


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

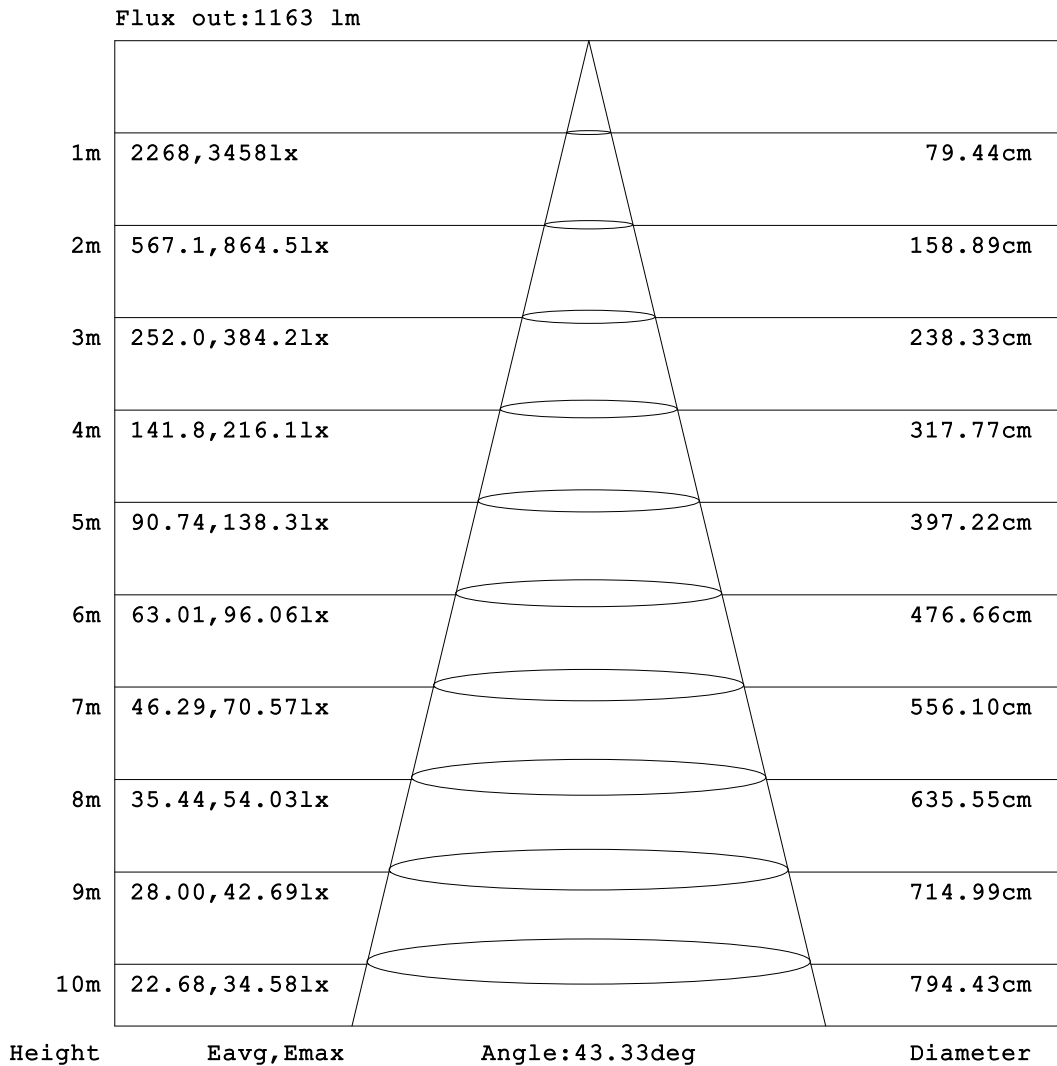


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

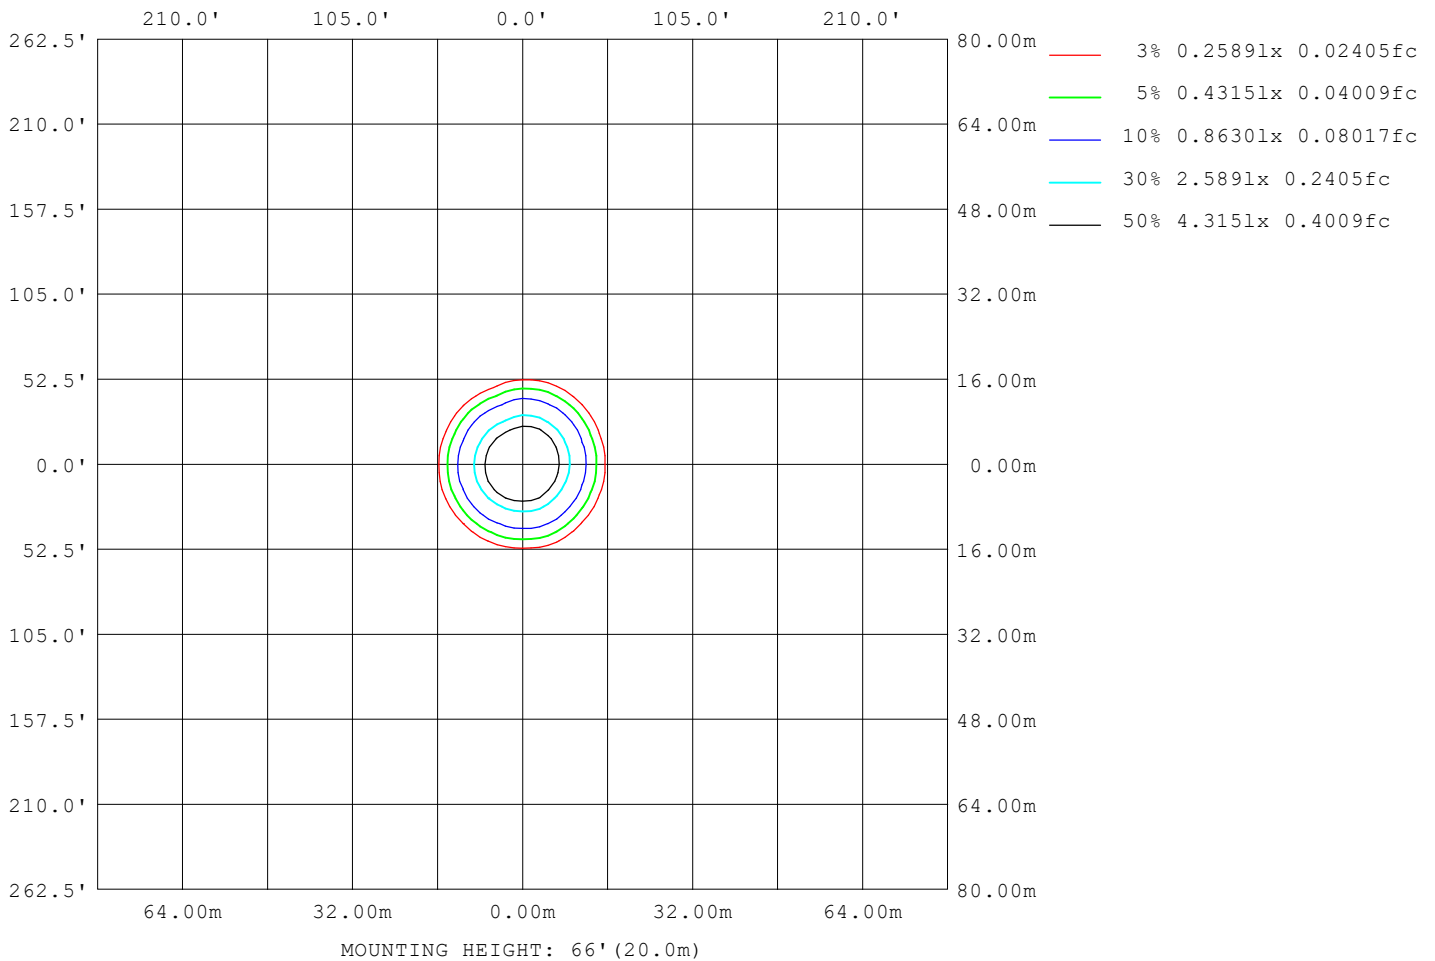

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:277.12V I:0.0755A P:20.262W PF:0.9679 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1960.37x1 lm		
NAME: ASD-CD-TR-MV-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	512
L_0~180 (75) av	152
L_0~180 (85) av	121
L_90~270 (65) av	519
L_90~270 (75) av	152
L_90~270 (85) av	112
L_45 (65) av	517
L_45 (75) av	152
L_45 (85) av	116

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

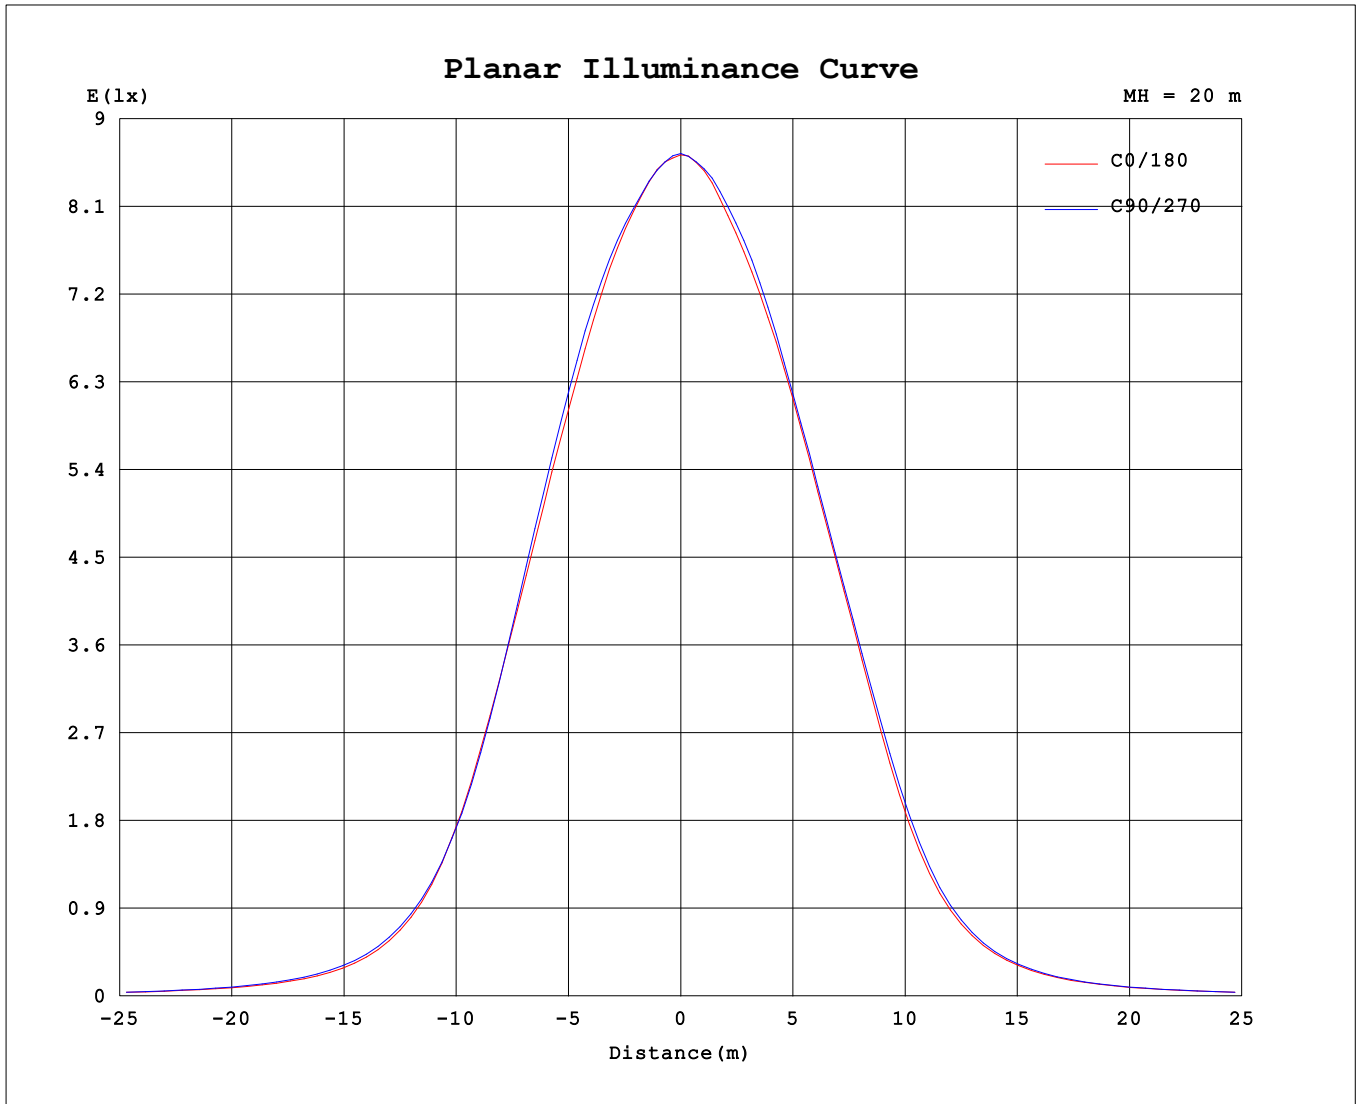

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-11-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

