
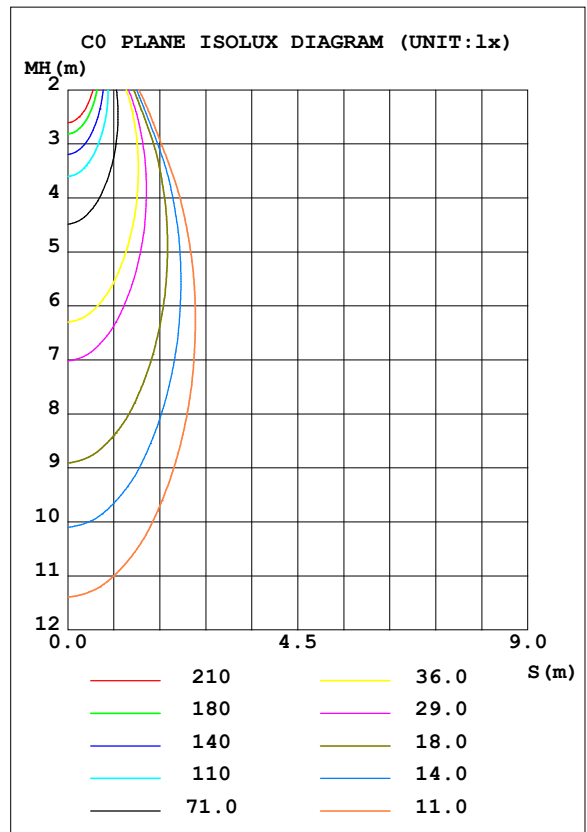


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 81.74 lm/W			
MODEL		I _{max} (cd)	1439	S/MH (C0/180)	0.59
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.58
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	649.38	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.4
NOMINAL FLUX (lm)	649.378	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

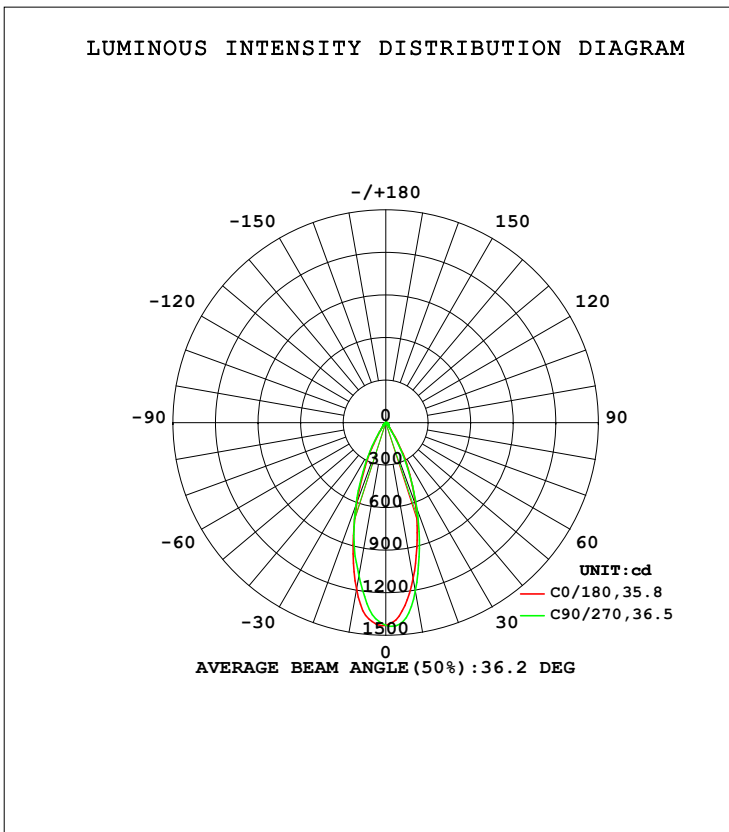

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1116	1188	1205	1215	1192	1152	1095	1096	0- 10	123.5	123.5	19,19
20	615.1	633.4	642.2	738.6	594.4	615.4	618.3	577.8	10- 20	245.5	369.0	56.8,56.8
30	211.4	196.2	181.4	221.7	175.2	199.0	194.5	170.8	20- 30	177.7	546.8	84.2,84.2
40	38.25	36.61	34.01	36.82	35.98	37.74	35.59	34.39	30- 40	51.31	598.1	92.1,92.1
50	21.50	21.20	21.31	21.40	21.62	21.70	21.63	21.52	40- 50	20.92	619.0	95.3,95.3
60	12.77	12.73	12.71	12.67	12.77	12.80	12.83	12.82	50- 60	14.89	633.9	97.6,97.6
70	7.146	7.149	7.103	7.019	6.993	6.928	6.970	7.090	60- 70	9.745	643.6	99.1,99.1
80	2.859	2.472	1.850	2.315	2.693	2.484	2.233	2.581	70- 80	4.940	648.6	99.9,99.9
90	0.0224	0.0190	0.0210	0.0163	0.0297	0.0254	0.0277	0.0243	80- 90	0.8192	649.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

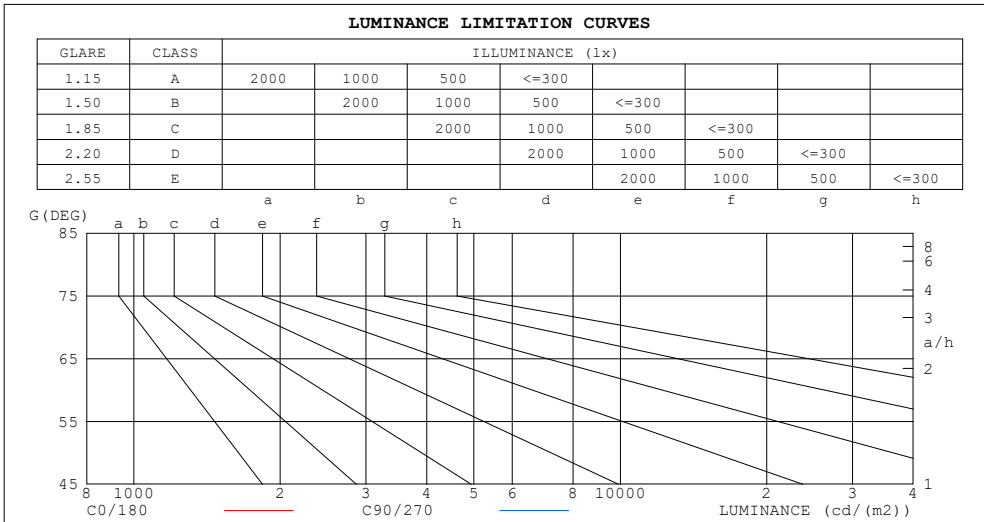

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	64	3
80	148	96
75	167	157
70	188	187
65	211	210
60	230	229
55	256	254
50	301	298
45	332	327


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.90	.86	.82	.88	.84	.81	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.71	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.72	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.65	.61	.69	.64	.61	.68	.64	.61	.67	.64	.61	.60

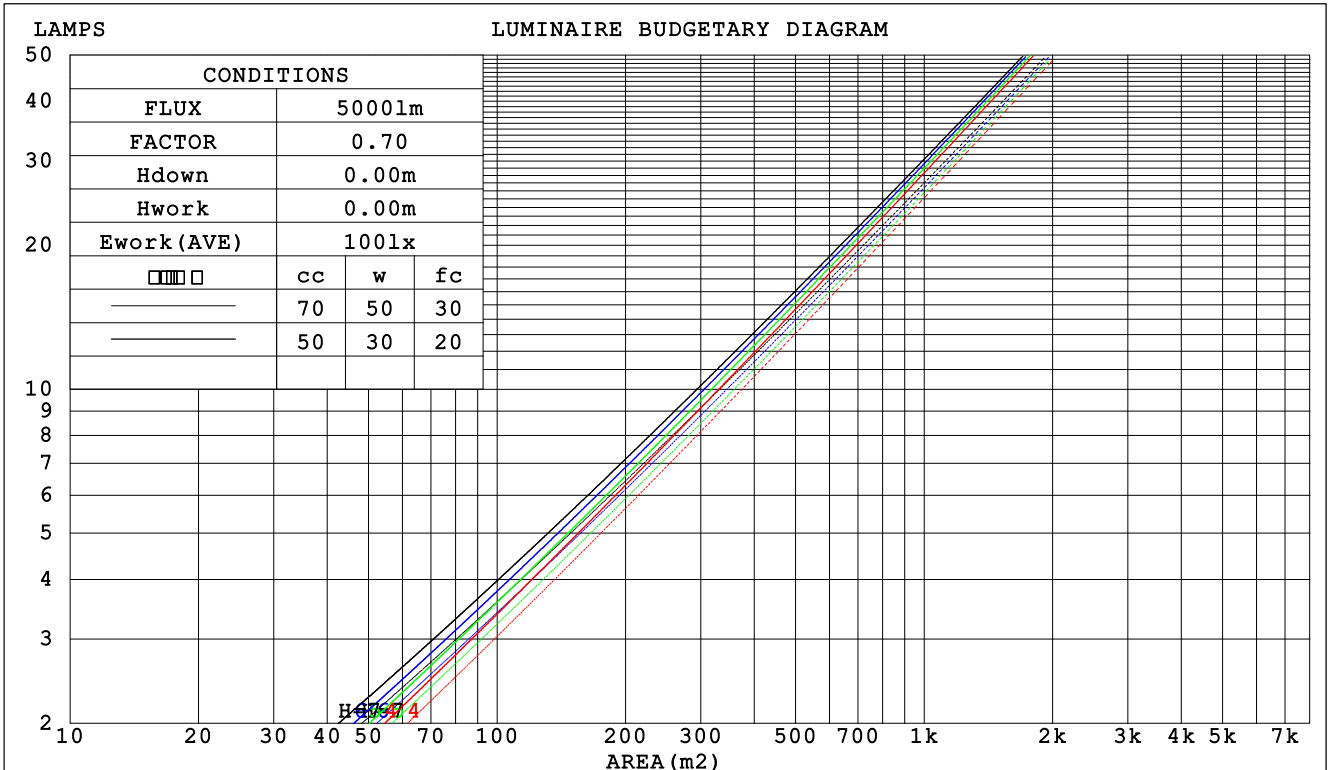

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.169 .096 .030	.162 .093 .029	.150 .086 .027	.138 .080 .026	.127 .074 .024	
2.0	.159 .087 .027	.154 .085 .026	.143 .080 .025	.134 .075 .023	.125 .070 .022	
3.0	.150 .080 .024	.145 .078 .023	.136 .074 .022	.128 .070 .021	.120 .067 .021	
4.0	.141 .073 .022	.137 .072 .021	.129 .069 .020	.122 .066 .020	.116 .063 .019	
5.0	.133 .068 .020	.130 .067 .019	.123 .064 .019	.117 .062 .018	.111 .060 .018	
6.0	.126 .063 .018	.123 .062 .018	.118 .060 .018	.112 .058 .017	.107 .056 .017	
7.0	.120 .059 .017	.117 .059 .017	.112 .057 .016	.108 .055 .016	.103 .054 .016	
8.0	.114 .056 .016	.112 .055 .016	.108 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.099 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm										
NAME: ASD-CD-PR-2D8AC-WH					TYPE:			WEIGHT:		
SPEC.:5000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.4	5.3	4.6	5.4	5.6	4.1	4.9	4.3	5.1	5.3
3H	5.2	6.0	5.4	6.1	6.3	4.9	5.7	5.2	5.9	6.1
4H	5.5	6.2	5.7	6.4	6.7	5.2	6.0	5.5	6.2	6.4
6H	5.7	6.4	6.0	6.6	6.9	5.4	6.1	5.6	6.3	6.5
8H	5.7	6.4	6.0	6.7	6.9	5.3	6.0	5.6	6.3	6.5
12H	5.7	6.4	6.0	6.6	6.9	5.3	5.9	5.6	6.2	6.5
4H 2H	4.7	5.4	5.0	5.7	5.9	4.4	5.2	4.7	5.4	5.6
3H	5.6	6.3	5.9	6.5	6.8	5.4	6.1	5.7	6.3	6.6
4H	6.0	6.6	6.4	6.9	7.2	5.8	6.4	6.2	6.7	7.0
6H	6.4	6.9	6.8	7.2	7.6	6.0	6.6	6.4	6.9	7.2
8H	6.4	6.9	6.8	7.3	7.6	6.0	6.5	6.4	6.9	7.2
12H	6.4	6.9	6.8	7.2	7.6	6.0	6.4	6.4	6.8	7.2
8H 4H	6.2	6.6	6.5	7.0	7.4	6.0	6.5	6.4	6.8	7.2
6H	6.6	7.0	7.0	7.4	7.8	6.2	6.6	6.6	7.0	7.4
8H	6.7	7.0	7.1	7.5	7.9	6.2	6.6	6.7	7.0	7.4
12H	6.7	7.0	7.2	7.5	7.9	6.2	6.5	6.6	6.9	7.4
12H 4H	6.1	6.6	6.5	6.9	7.3	5.9	6.4	6.4	6.8	7.2
6H	6.6	6.9	7.0	7.3	7.8	6.2	6.6	6.7	7.0	7.4
8H	6.7	7.0	7.2	7.4	7.9	6.2	6.5	6.7	7.0	7.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.6					+ 0.4 / - 0.5				
1.5H	+ 0.9 / - 0.3					+ 0.5 / - 0.3				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.6				

CIE Pub.117, 649.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.5)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

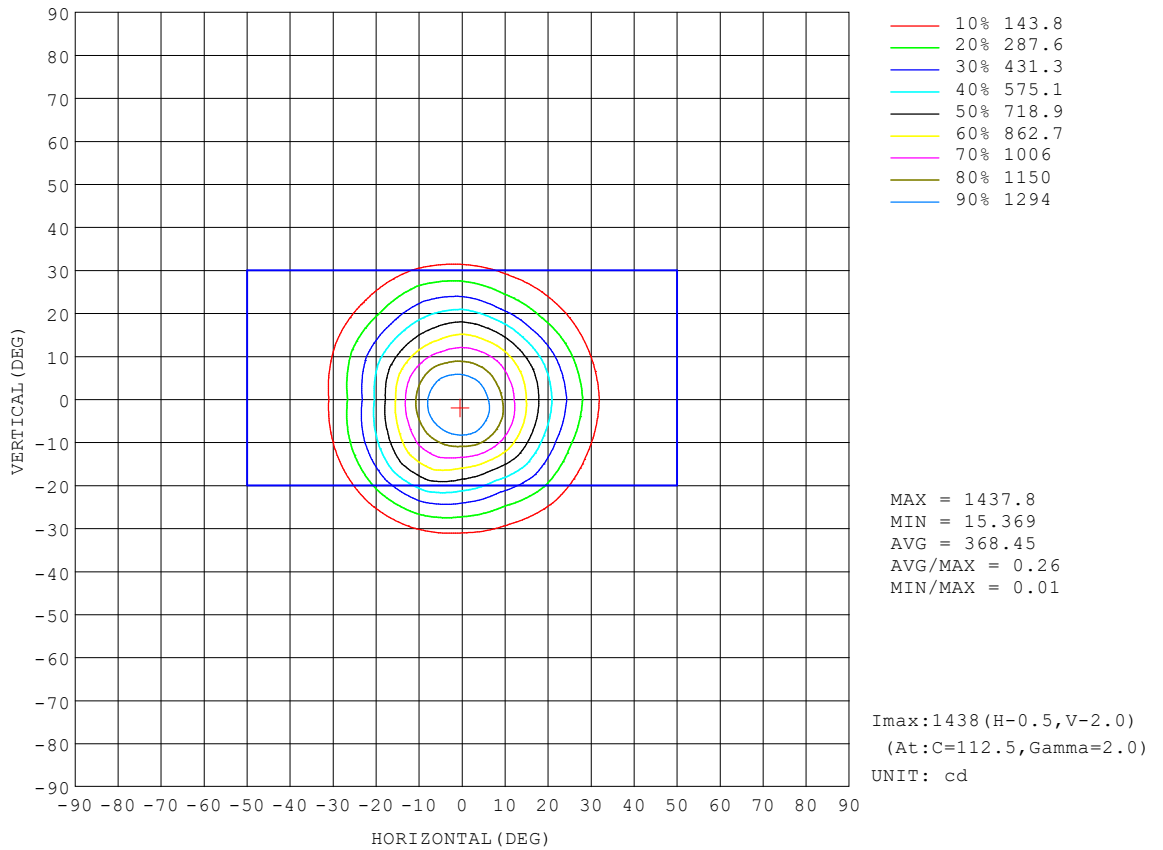


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

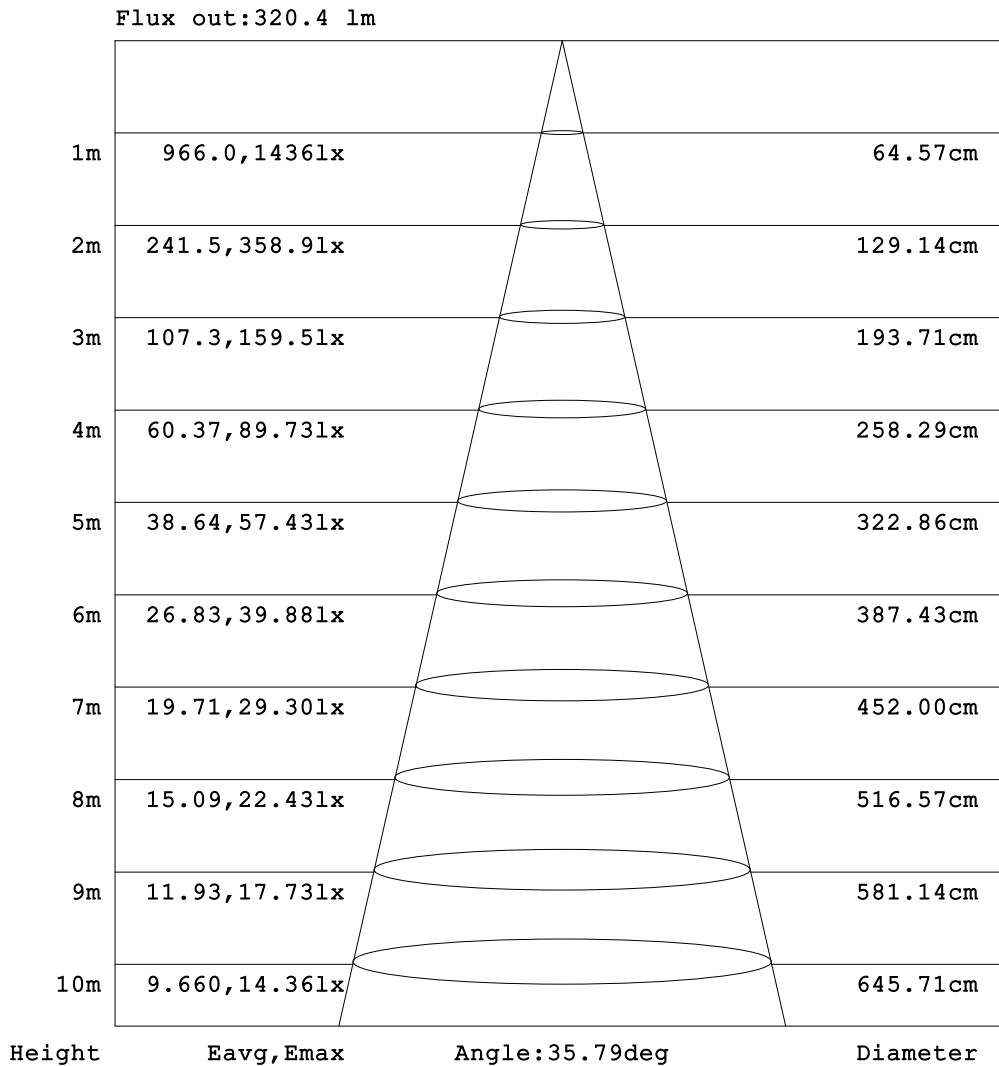


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

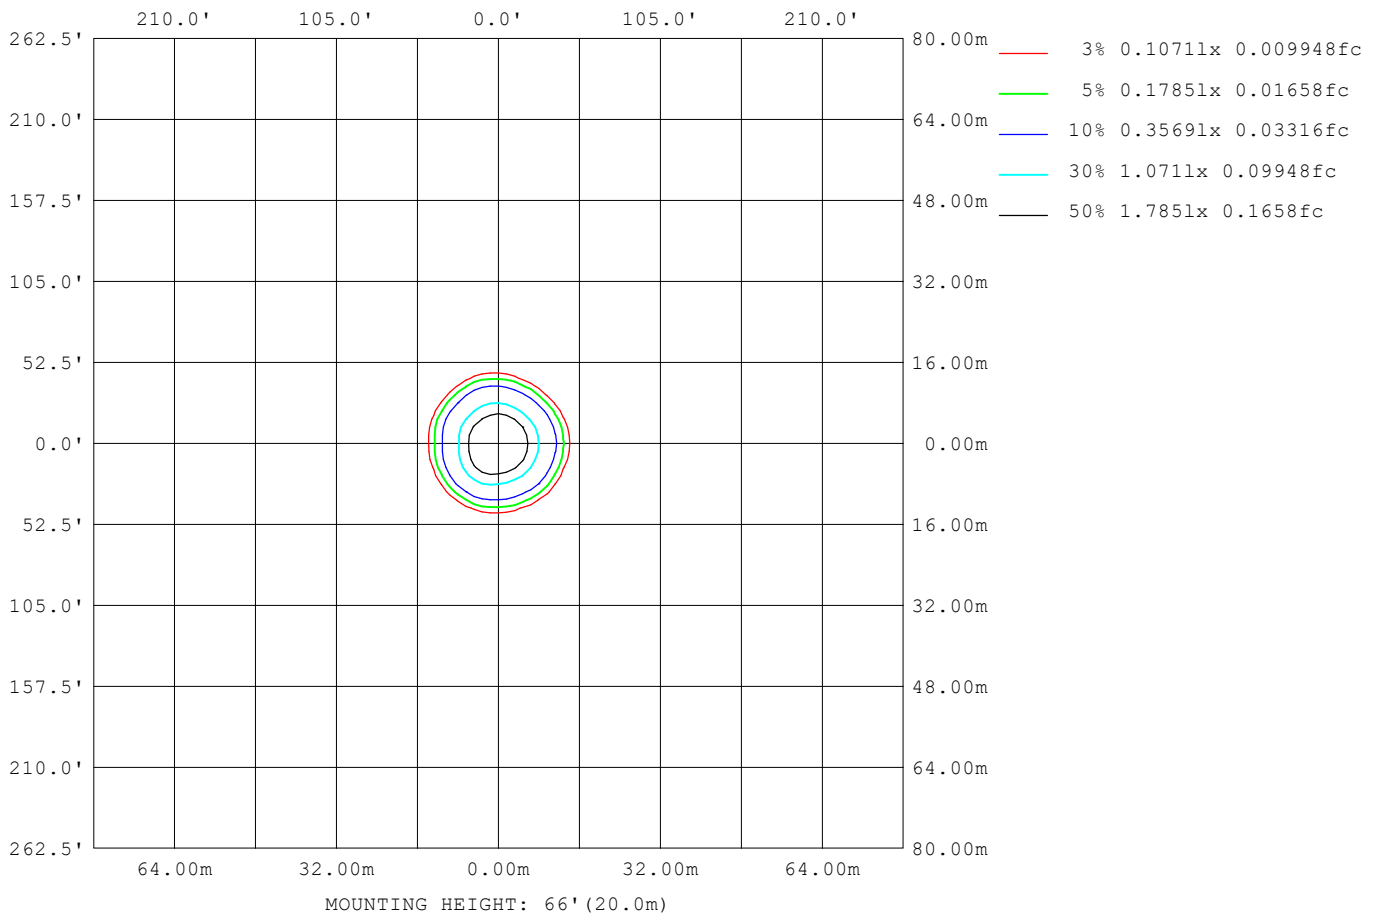

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	210
L_0~180 (75) av	164
L_0~180 (85) av	66
L_90~270 (65) av	209
L_90~270 (75) av	159
L_90~270 (85) av	13
L_45 (65) av	209
L_45 (75) av	163
L_45 (85) av	38

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

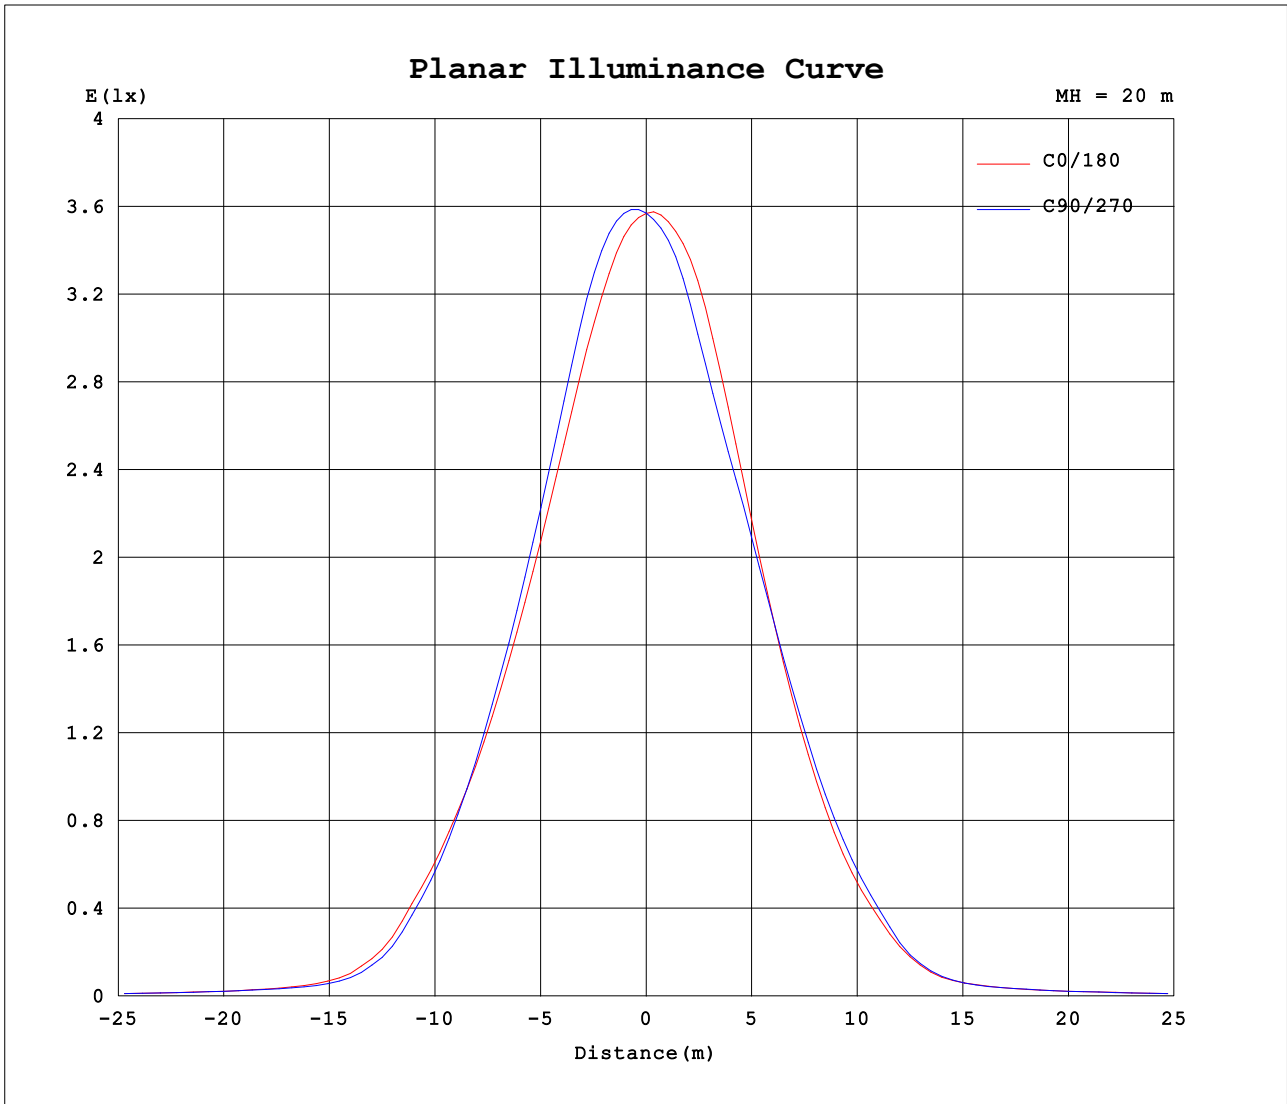

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0967A P:7.9441W PF:0.9373 Freq:59.98Hz Lamp Flux:649.378x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1428	1428	1428	1428	1428	1428	1428	1428	1428	1428	1428	1428	1428	1428	1428	1428			
5	1333	1357	1378	1399	1407	1412	1408	1402	1389	1371	1357	1338	1324	1316	1317	1319			
10	1116	1161	1188	1211	1205	1214	1215	1207	1192	1173	1152	1109	1095	1093	1096	1094			
15	859	881	906	899	919	987	989	927	891	900	876	855	869	849	857	860			
20	615	611	633	596	642	737	739	657	594	631	615	617	618	578	578	609			
25	404	377	396	351	387	457	463	411	349	398	384	407	384	333	334	377			
30	211	191	196	170	181	217	222	204	175	206	199	217	194	167	171	191			
35	76.4	69.6	69.9	61.3	62.1	73.6	74.0	70.4	63.6	73.4	72.2	75.4	66.4	57.0	59.2	69.3			
40	38.3	36.9	36.6	34.0	34.0	36.9	36.8	36.5	36.0	38.0	37.7	37.4	35.6	34.0	34.4	36.5			
45	26.1	26.2	26.0	25.8	25.7	25.9	25.8	26.1	26.4	26.6	26.6	26.4	26.2	26.0	25.9	25.9			
50	21.5	21.4	21.2	21.3	21.3	21.5	21.4	21.6	21.6	21.6	21.7	21.7	21.6	21.5	21.5	21.4			
55	16.3	16.3	16.2	16.2	16.2	16.3	16.4	16.5	16.5	16.4	16.6	16.5	16.5	16.4	16.4	16.3			
60	12.8	12.8	12.7	12.8	12.7	12.8	12.7	12.7	12.8	12.7	12.8	12.7	12.8	12.8	12.8	12.7			
65	9.89	9.91	9.90	9.92	9.88	9.88	9.81	9.81	9.79	9.74	9.74	9.72	9.78	9.81	9.88	9.86			
70	7.15	7.16	7.15	7.16	7.10	7.09	7.02	7.02	6.99	6.94	6.93	6.90	6.97	7.02	7.09	7.10			
75	4.81	4.82	4.80	4.67	4.51	4.55	4.67	4.67	4.64	4.59	4.59	4.57	4.62	4.65	4.73	4.76			
80	2.86	2.88	2.47	2.06	1.85	1.98	2.32	2.71	2.69	2.66	2.48	2.28	2.23	2.30	2.58	2.81			
85	0.62	0.96	0.31	0.03	0.03	0.02	0.28	0.83	0.65	0.83	0.47	0.27	0.23	0.24	0.42	0.86			
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.03	0.02	0.02	0.03			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: