
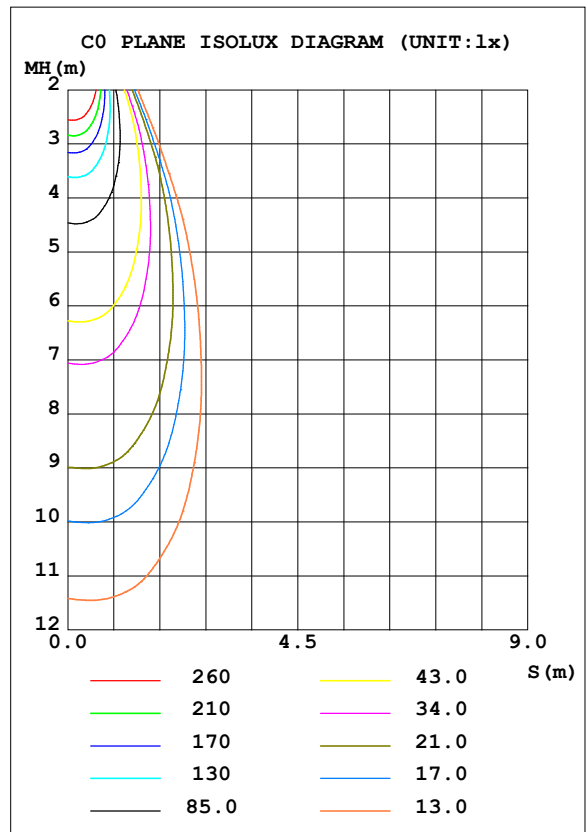


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 60.28 lm/W			
MODEL		Imax (cd)	1722	S/MH (C0/180)	0.62
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.60
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	830	<input type="checkbox"/> UP, DN (C0-180)	0.0, 52.3
NOMINAL FLUX (lm)	830	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 47.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

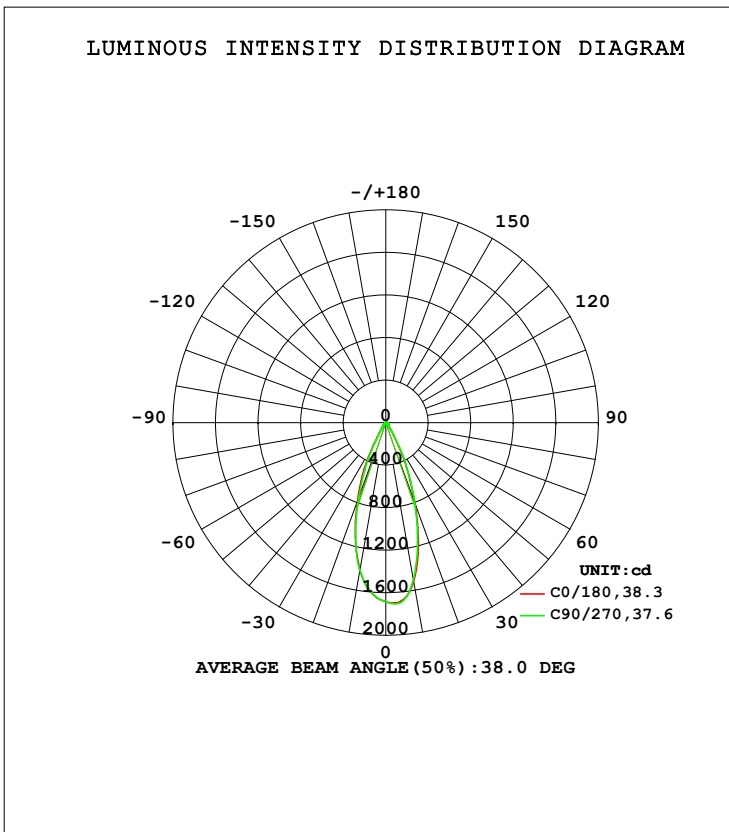

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum,lamp
10	1513	1500	1498	1452	1407	1422	1410	1425	0- 10	150.9	150.9	18.9,18.9
20	802.7	911.9	796.9	785.5	780.1	661.3	741.2	774.0	10- 20	308.9	459.8	57.6,57.6
30	208.9	306.0	225.9	209.2	191.2	142.6	161.0	196.9	20- 30	213.8	673.6	84.4,84.4
40	50.18	57.22	52.50	49.01	48.00	46.17	46.31	47.26	30- 40	60.28	733.9	92,92
50	27.67	28.71	28.87	27.44	26.72	25.65	25.91	26.39	40- 50	27.92	761.8	95.5,95.5
60	14.81	15.19	15.39	14.77	14.57	14.13	14.18	14.27	50- 60	17.86	779.7	97.7,97.7
70	8.198	8.447	8.486	8.057	7.802	7.534	7.562	7.716	60- 70	10.93	790.6	99.1,99.1
80	3.675	3.830	3.281	3.362	3.203	2.976	3.024	3.245	70- 80	5.843	796.4	99.8,99.8
90	0.0249	0.0274	0.0248	0.0190	0.0312	0.0304	0.0342	0.0313	80- 90	1.430	797.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

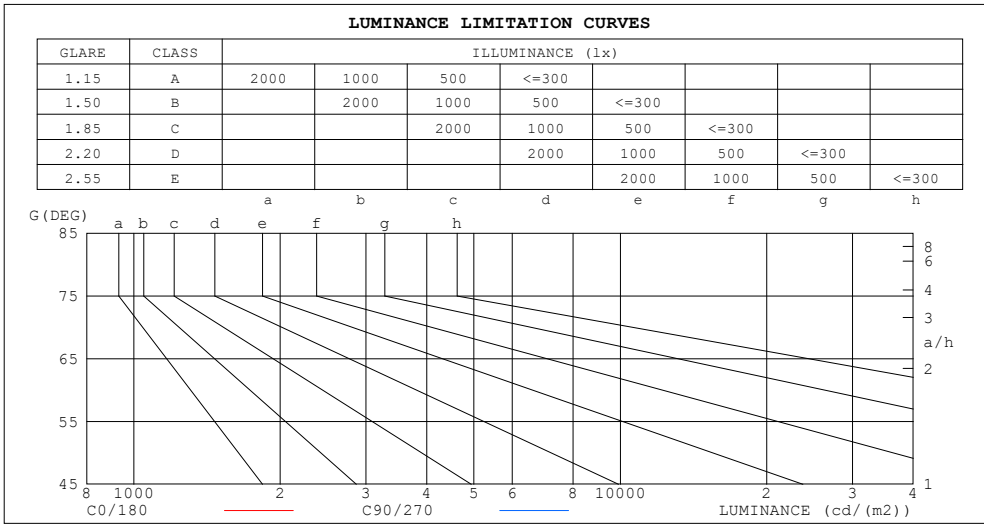

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	119	17
80	192	169
75	201	206
70	217	222
65	238	244
60	268	276
55	316	323
50	390	402
45	460	466


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.84	.90	.86	.83	.88	.84	.82	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.79	.85	.81	.78	.84	.80	.77	.82	.79	.77	.75
6.0	.84	.78	.75	.83	.78	.74	.82	.77	.74	.80	.76	.73	.79	.76	.73	.72
7.0	.80	.75	.71	.79	.74	.71	.78	.73	.70	.77	.73	.70	.76	.72	.70	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.64	.62
10.0	.70	.65	.62	.70	.65	.62	.69	.64	.61	.68	.64	.61	.67	.64	.61	.60

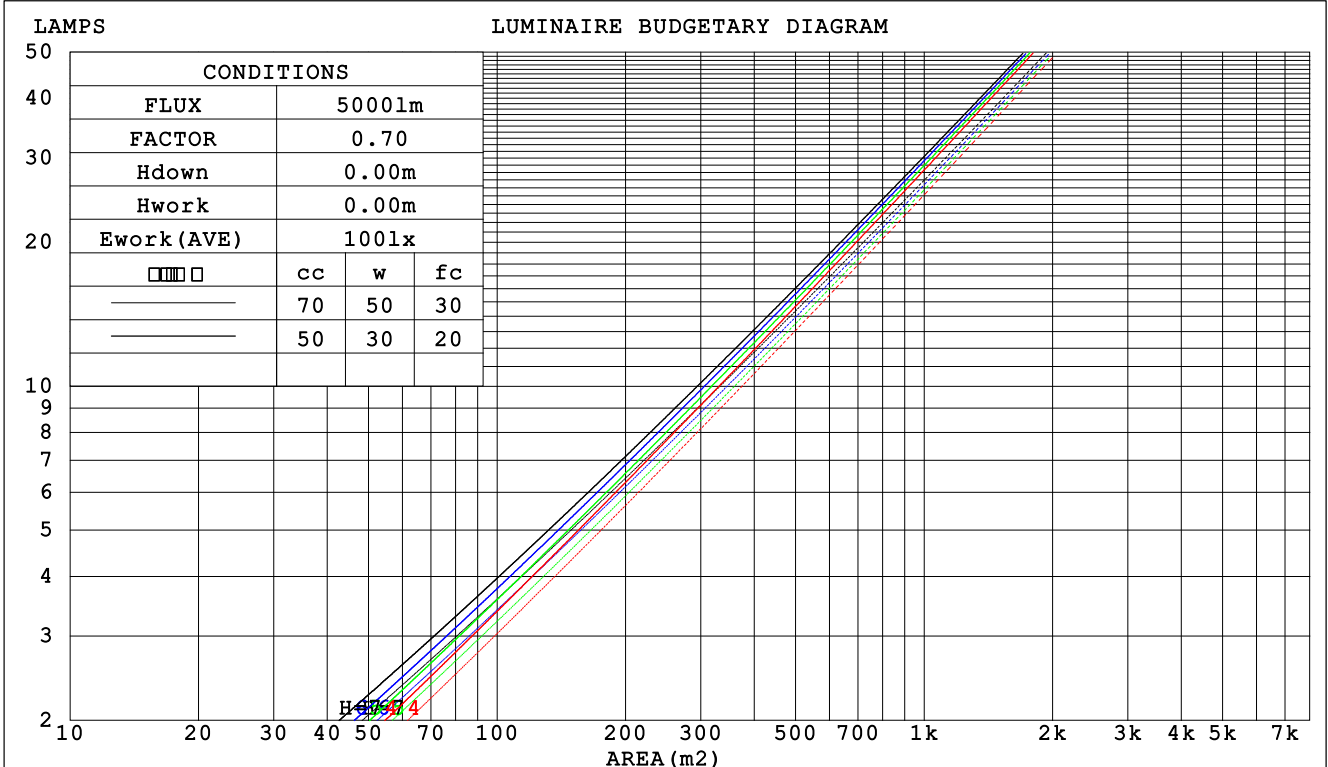

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coefficients (WEC)		
0.0						
1.0	.169 .096 .030	.162 .092 .029	.150 .086 .027	.138 .080 .026	.127 .074 .024	
2.0	.159 .087 .027	.153 .084 .026	.143 .079 .025	.133 .075 .023	.124 .070 .022	
3.0	.149 .079 .024	.145 .077 .023	.136 .074 .022	.127 .070 .021	.120 .066 .021	
4.0	.141 .073 .021	.137 .071 .021	.129 .068 .020	.122 .065 .020	.115 .063 .019	
5.0	.133 .068 .020	.129 .066 .019	.123 .064 .019	.117 .062 .018	.111 .059 .018	
6.0	.126 .063 .018	.123 .062 .018	.117 .060 .017	.112 .058 .017	.107 .056 .017	
7.0	.120 .059 .017	.117 .058 .017	.112 .057 .016	.107 .055 .016	.103 .053 .016	
8.0	.114 .056 .016	.112 .055 .016	.107 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.096 .049 .014	
10.0	.104 .050 .014	.102 .050 .014	.099 .048 .014	.096 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients (CCEC)		
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.012 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.086 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm										
NAME: ASD-CD-CR-2D15AC-CH/WH					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.6	5.4	4.8	5.6	5.8	4.9	5.8	5.2	5.9	6.1
3H	5.2	6.0	5.5	6.2	6.4	5.5	6.3	5.8	6.5	6.7
4H	5.5	6.2	5.8	6.5	6.7	5.8	6.5	6.1	6.7	7.0
6H	5.7	6.4	6.0	6.7	6.9	6.0	6.7	6.3	6.9	7.2
8H	5.8	6.5	6.1	6.7	7.0	6.0	6.7	6.3	6.9	7.2
12H	5.8	6.5	6.1	6.7	7.0	6.0	6.6	6.3	6.9	7.2
4H 2H	4.8	5.6	5.1	5.8	6.0	5.1	5.9	5.4	6.1	6.3
3H	5.6	6.3	5.9	6.5	6.8	5.9	6.5	6.2	6.8	7.1
4H	6.0	6.6	6.4	6.9	7.2	6.3	6.9	6.6	7.2	7.5
6H	6.4	6.9	6.8	7.2	7.6	6.6	7.1	6.9	7.4	7.8
8H	6.5	7.0	6.9	7.3	7.7	6.6	7.1	7.0	7.5	7.8
12H	6.5	7.0	6.9	7.4	7.7	6.6	7.1	7.0	7.4	7.8
8H 4H	6.2	6.6	6.5	7.0	7.4	6.4	6.9	6.8	7.2	7.6
6H	6.6	7.0	7.1	7.4	7.8	6.8	7.2	7.2	7.6	8.0
8H	6.8	7.2	7.3	7.6	8.1	6.9	7.3	7.4	7.7	8.1
12H	7.0	7.3	7.4	7.7	8.2	6.9	7.2	7.4	7.7	8.1
12H 4H	6.1	6.6	6.5	7.0	7.3	6.4	6.8	6.8	7.2	7.6
6H	6.7	7.0	7.1	7.4	7.9	6.8	7.2	7.3	7.6	8.0
8H	6.9	7.2	7.4	7.6	8.1	7.0	7.3	7.4	7.7	8.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.7					+ 0.6 / - 0.7				
1.5H	+ 0.6 / - 0.4					+ 0.8 / - 0.4				
2.0H	+ 0.8 / - 0.6					+ 0.9 / - 0.7				

CIE Pub.117, 797.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.8)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

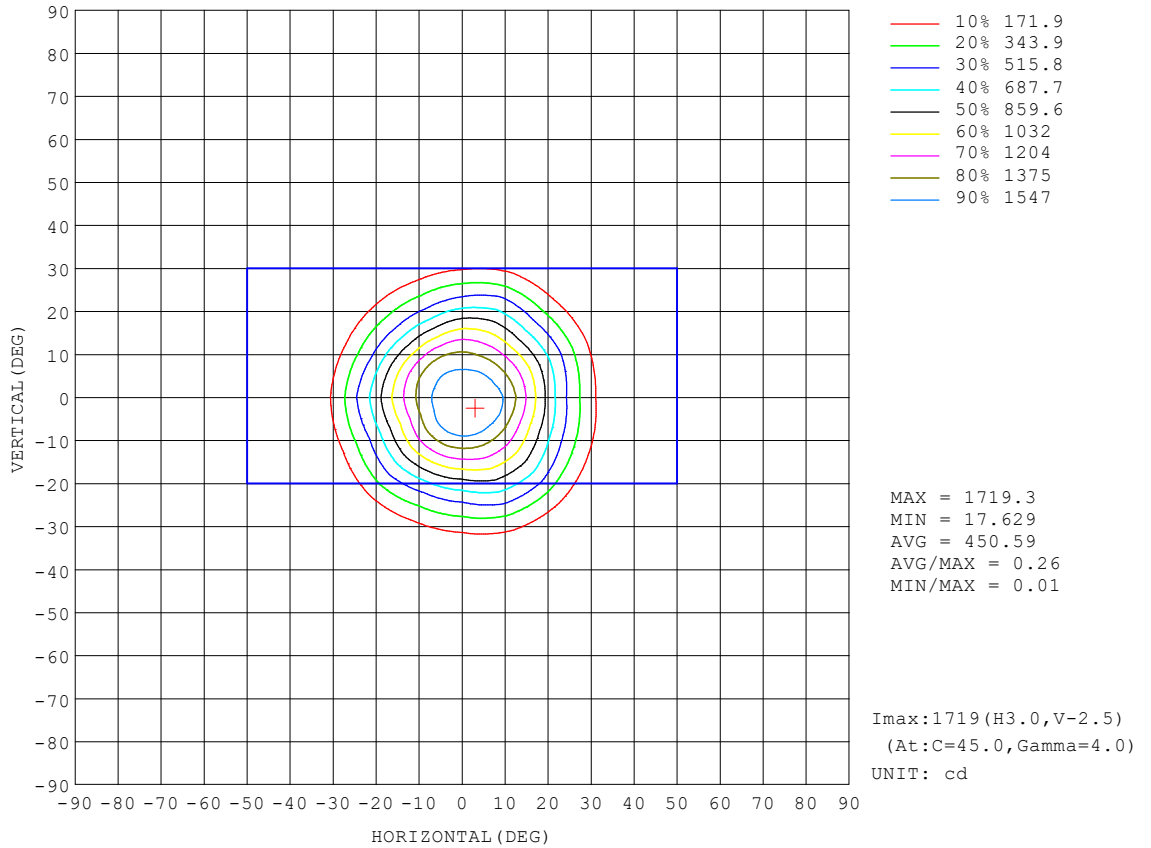


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

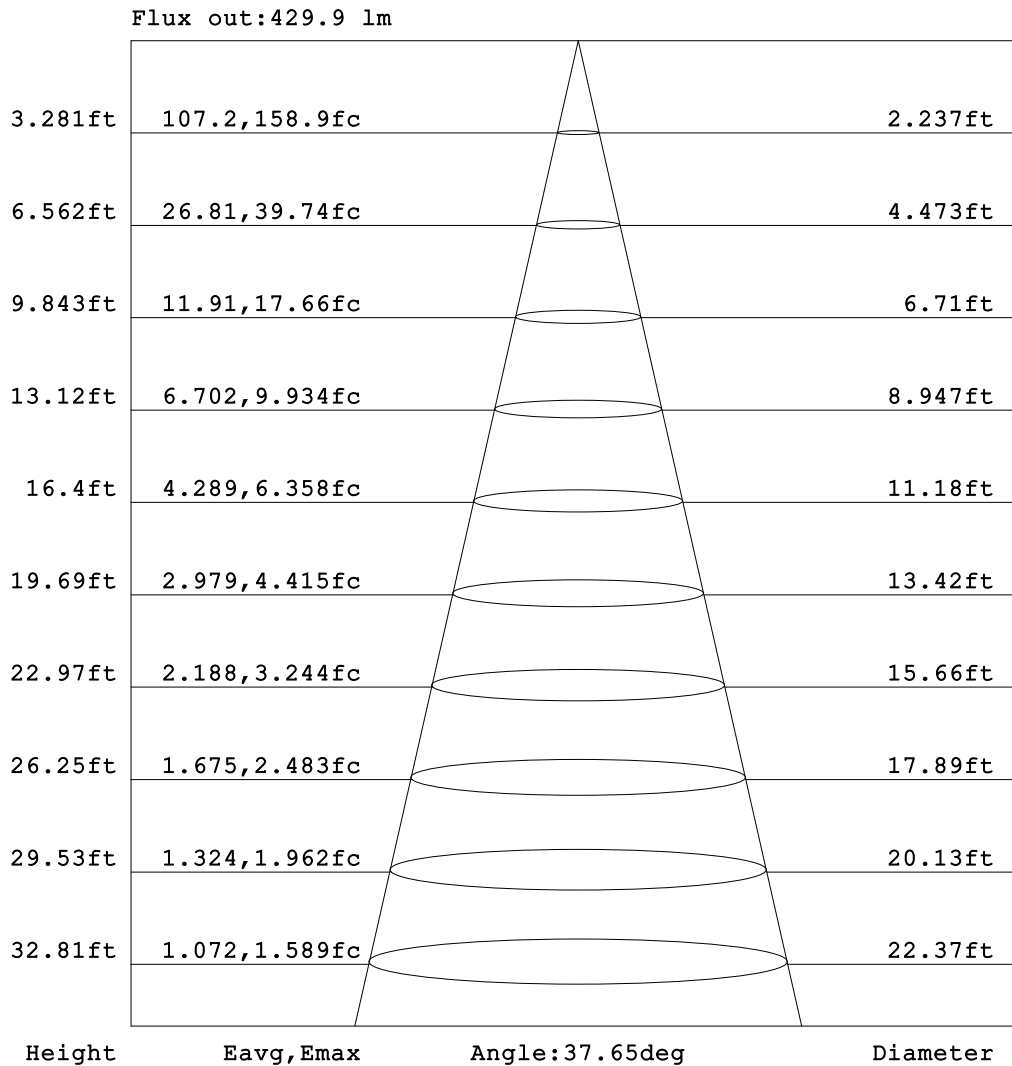


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

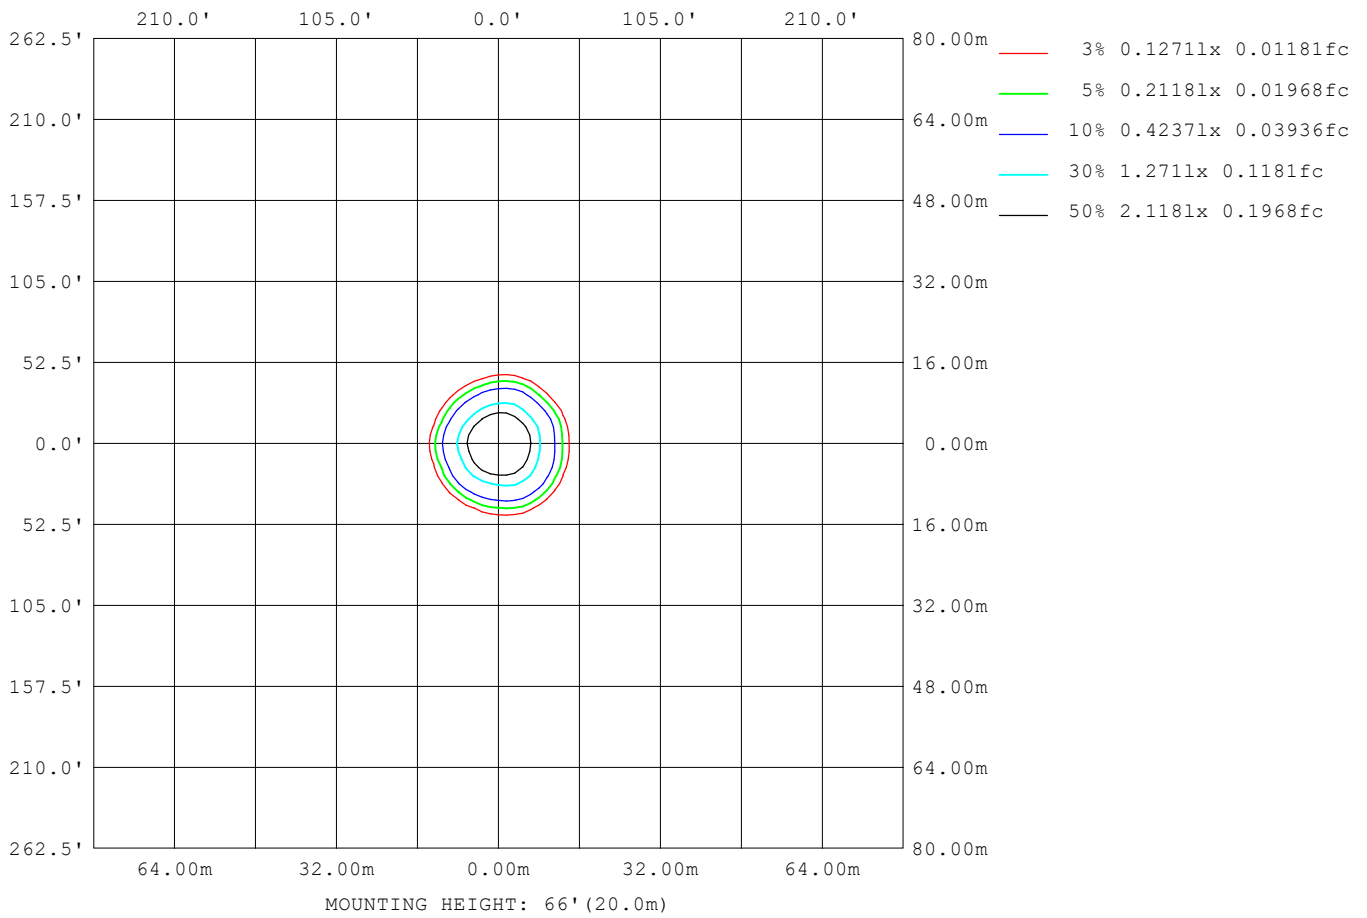

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.02V I:0.1119A P:13.236W PF:0.9487 Freq:59.98Hz Lamp Flux:830x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	233
L_0~180 (75) av	192
L_0~180 (85) av	106
L_90~270 (65) av	235
L_90~270 (75) av	192
L_90~270 (85) av	62
L_45 (65) av	232
L_45 (75) av	190
L_45 (85) av	130

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

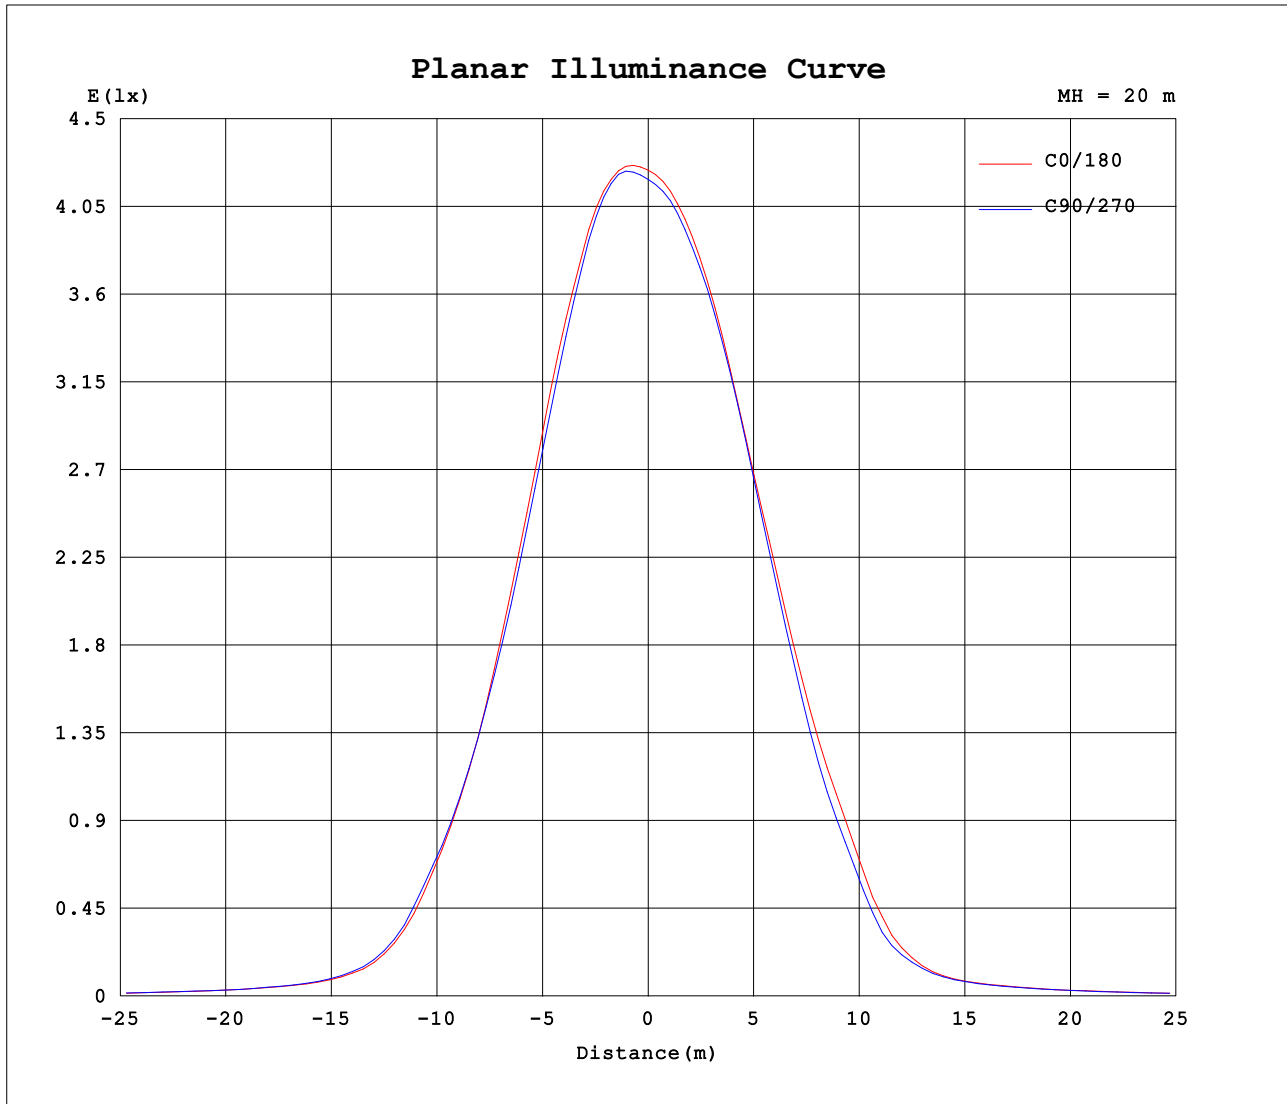

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-20

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

